


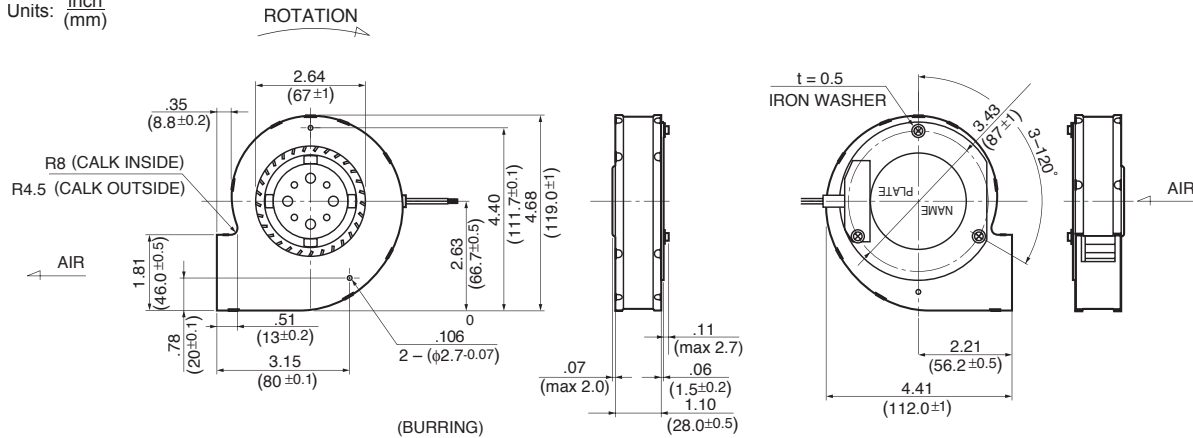


EMINEBEA.COM

-10°C ~ +60°C (Operating)  
-40°C ~ +80°C (Storage)  
(non-condensing environment)

## Outline

Units:  $\frac{\text{inch}}{(\text{mm})}$ 

## Characteristic Curves

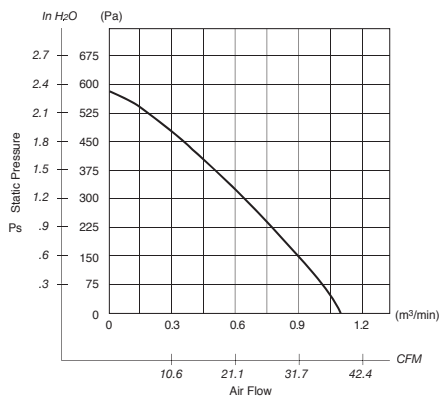

## Material

Casing : Steel  
Impeller : PBT Glass 30%  
Bearing : Ball Bearing  
Lead Wire: UL1007, AWG22, +Red, -Black

## Specifications

| MODEL                    |             | Rated Voltage | Operating Voltage | Current           | Input Power       | Speed                              | Max. Air Flow     |                        | Max. Static Pressure |                    | Noise              | Mass |
|--------------------------|-------------|---------------|-------------------|-------------------|-------------------|------------------------------------|-------------------|------------------------|----------------------|--------------------|--------------------|------|
|                          | Product No. | (V)           | (V)               | (A) <sup>*1</sup> | (W) <sup>*1</sup> | (min <sup>-1</sup> ) <sup>*1</sup> | CFM <sup>*1</sup> | (m³/min) <sup>*1</sup> | in H <sub>2</sub> O  | (Pa) <sup>*1</sup> | (dB) <sup>*1</sup> | (g)  |
| BL4447-04W- <b>B40</b> - | X00         | 12            | 6 ~ 13            | 1.70              | 40.8              | 4400                               | 38.8              | 1.10                   | 2.25                 | 560                | 65.0               | 300  |

Rotation: Clockwise

\*1: Average Values in Free Air