


SMD Oscillators- CMOS Output

Frequency Stability	$\pm 25 \text{ ppm}$, $\pm 50 \text{ ppm}$
Operating Temperature Range	- 10 ~ + 70 °C , or specify
Storage Temperature Range	- 55 ~ + 125 °C
Voltage Vol (Max.) / Voh (Min.)	0.1 VDD / 0.9 VDD
Rise (Tr) / Fall (Tf) Time	8 ns Max.
Supply Current	15 mA Max.
Symmetry	45 ~ 55 %
Start-up Time	5 ms Max.
Phase Jitter (12 KHz ~ 20 MHz)	1 ps Max.
Aging (at 25 °C)	$\pm 3 \text{ ppm / year Max.}$

Dimensions

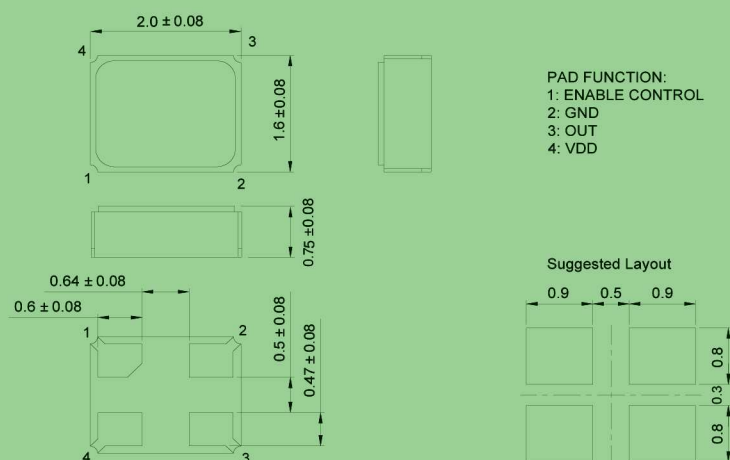

Remark : Specification subject to change without prior notice. Please confirm with our sales.

Units: mm