



Mallory Sonalert Products, Inc.

Part #:

MSE14MWH1

Sales Outline Drawing

Revision:


A

Specifications:


Sound Level Category	Medium
Mode of Operation	Whooping Sweep 2.1 - 5.8 kHz @ 5 Sweeps per Sec.
Voltage Rating	7 to 14 VDC
Frequency	2100-5800 Hz Typical
Loudness @ 1 FT	75 to 85 dB(A) Typ.
Current Draw	50mA MAX
Housing Material	Valox (UL94V-0), Color: Black
Storage Temperature	-40° to +80°C
Operating Temperature	-40° to +65°C
Weight (Typical)	4.0g
Options	Please contact factory.

Dimensions: Inches (mm)


ROHS Compliant

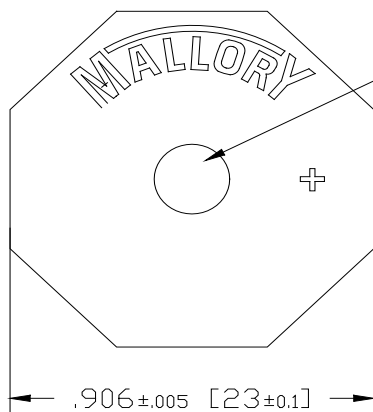

EMISSION HOLE
Ø .188±.005 [4.8±0.1]

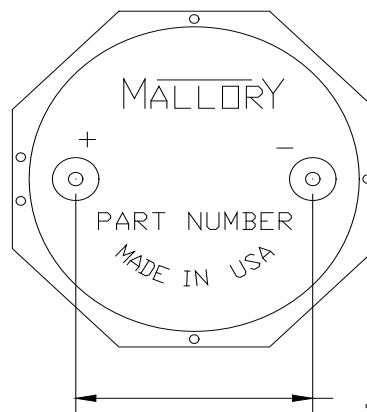

.590±.012 [15±0.3]

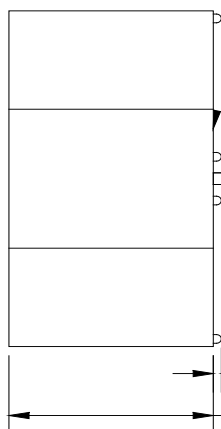

.031±.002 [0.8±0.04]
(2 Pins)

.197 [5]
.165 [4]

.020±.005 [.5±0.1]

.509±.005 [12.9±0.1]

NOTE A:
TERMINALS - .031" DIA, NICKEL/TIN COATED BRASS.

NOTE B:
MOUNTING- INSERT INTO PRINTED CIRCUIT BOARD AND HAND OR MACHINE SOLDER.
UNITS ARE SUITABLE FOR WAVE SOLDERING. RECOMMENDED MAXIMUM TEMPERATURE
AND TIME DURATION FOR WAVE SOLDERING IS +270°C AND 3 SECONDS RESPECTIVELY.