


Optical Imaging Touch screen

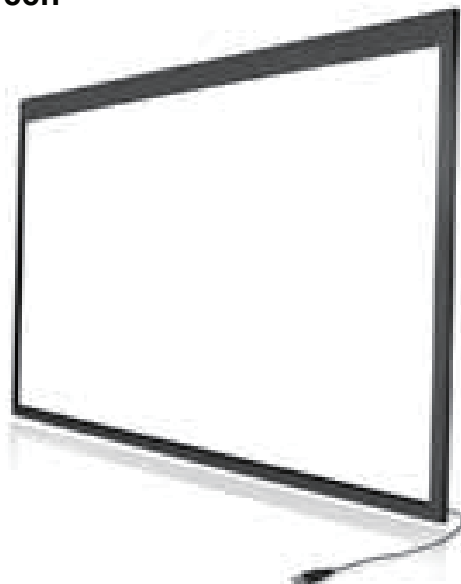

Item	Parameter
Structure Parameters	
Size	26" ~ 110"
Aspect Ratio	16:9
Thickness	14.5/7.8/19.9mm
Luminous transmission	≥92%, up to 100% (no glass)
Life	5 years
Panel	N/A
Panel Material	N/A
Electrical	
Resolution by USB report	32768*32768
Touch Accuracy	±2.5 mm
Power Supply	USB powered
Interface	USB2.0 (full speed)
Voltage	Typical +5VDC, +4.75V ~ +5.25V
Current	<400mA
Antistatic	ESD: touch discharge±8; air discharge±15
Drift	No drift in the operating temperature
Agency Approvals	CE, FCC Class B
Sample Rates	120PT/s
Software Parameters	
Operation Systems	Windows7, Windows XP, Windows Vista, Linux, MAC OSX
Mouse Simulation	Click, drag, double-click, right-click
Multi-touch	2-point-touch of Windows 7
Calibration	4 points
Touch Parameters	
Touch Times	Unlimited
Touch Activation Force	No pressure required
Touch method	Finger, brush-pencil, special pen or any opaque object
Response Speed	≤16ms (2-point-touch)
Environmental	
Operating Temperature	-15℃ ~ 55℃
Storage Temperature	-40℃ ~ 75℃
Operating Humidity	10% ~ 90% RH
Storage Humidity	10% ~ 90% RH
ROHS	Meet the standard of ROHS