




FHY CONNECTOR

0.5mm pitch/Connectors for FPC




ZIF
TYPE

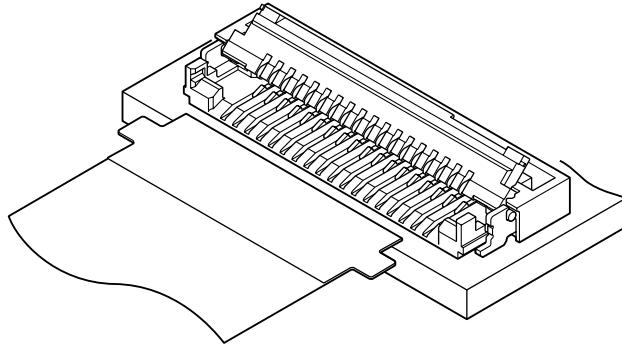

The connector for the 0.3mm thickness FPC with a mounting height of 1.3mm. FPC with protrusion prevents incomplete insertion and mis-insertion, so that it provides reliable connection.

- **A FPC with protrusion improves operability and reliability**
- **Reliable cover**
- **Self-lock mechanism enables the cover to close by one-touch operation**


PC board layout (viewed from component side) and Assembly layout

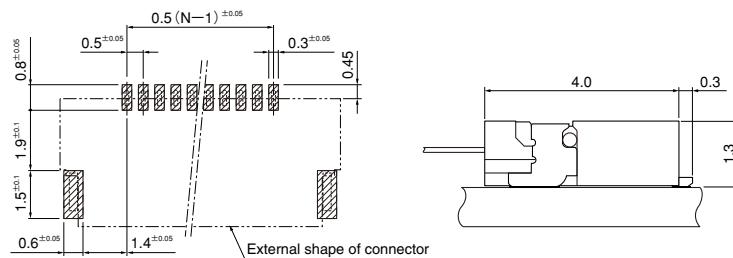

Note:

1. Tolerances are non-cumulative: ± 0.05 mm for all centers.
2. The dimensions above should serve as a guideline. Contact JST for details.
3. N --- Number of circuits

Connector

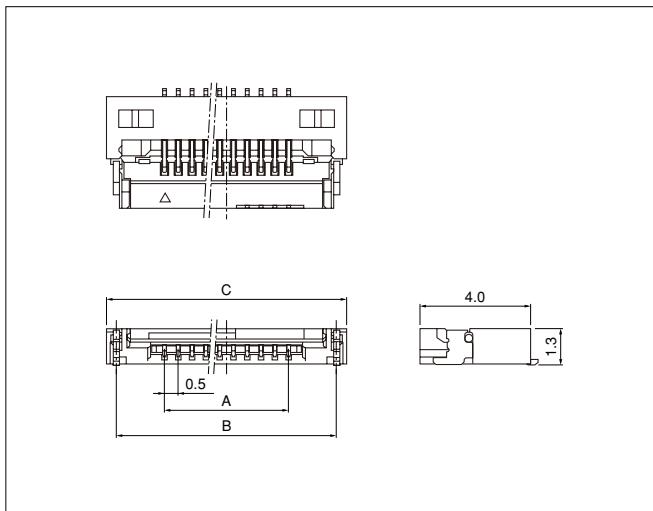

Circuits	Model No.	Dimensions (mm)			Q'ty / reel
		A	B	C	
10	10FHY-RSM1-GAN-TF	4.5	8.0	8.7	3,000
18	18FHY-RSM1-GAN-TF	8.5	12.0	12.7	3,000
28	28FHY-RSM1-GAN-TF	13.5	17.0	17.7	3,000
30	30FHY-RSM1-GAN-TF	14.5	18.0	18.7	3,000
35	35FHY-RSM1-GAN-TF	17.0	20.5	21.2	3,000
40	40FHY-RSM1-GAN-TF	19.5	23.0	23.7	3,000
50	50FHY-RSM1-GAN-TF	24.5	28.0	28.7	3,000
60	60FHY-RSM1-GAN-TF	29.5	33.0	33.7	3,000

Material and Finish

Contact: Copper alloy, nickel-undercoated, gold-plated (nickel-stripe)

Housing: Heat resisting resin, UL94V-0, natural

Solder tab: Copper alloy, copper-undercoated, tin-plated (reflow treatment)


Cover: Heat resisting resin, UL94V-0, black

RoHS compliance This product displays (LF)(SN) on a label.

Note: 1. This products listed above are supplied on embossed-tape.

2. Contact JST for tin-plated products.

Lead section dimensions of FPC

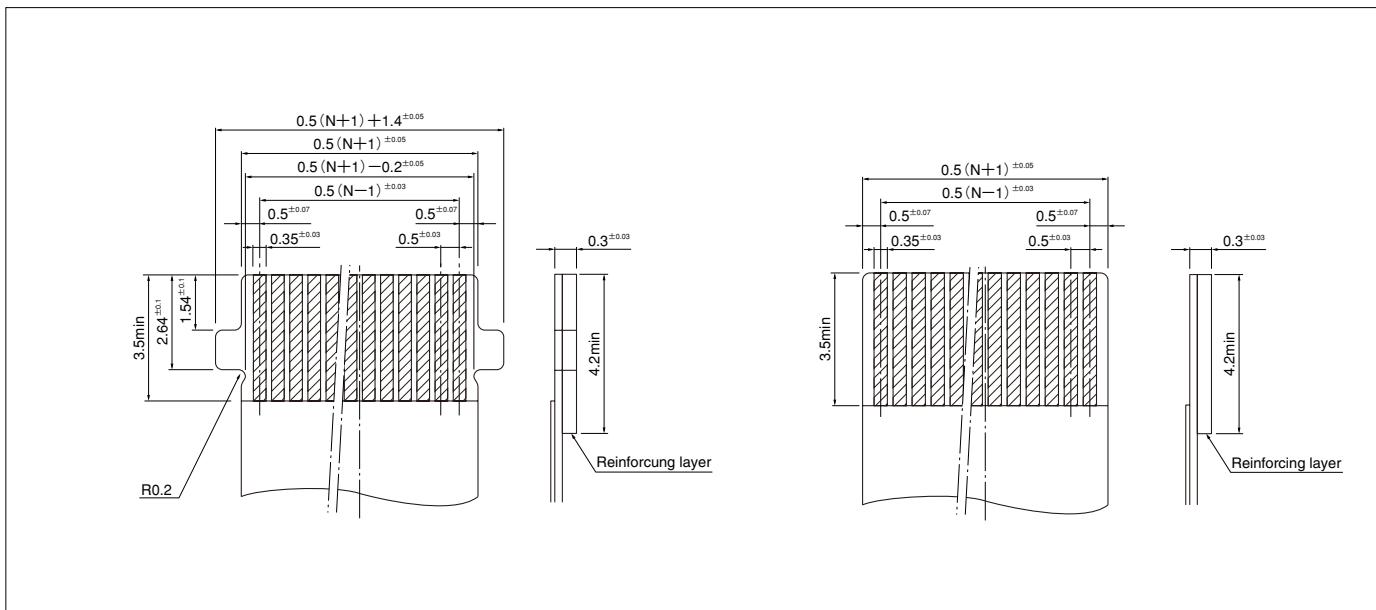

Note: N --- Number of circuits