




| JKL LAMP NUMBER | VOLTS RATED | AMPS ±10% | MSCP ±25% | LUMENS ±25% | AVERAGE LIFE HRS. | FILAMENT TYPE |
|-----------------|-------------|-----------|-----------|-------------|-------------------|---------------|
| DA513 | 8.0 | .055 | .120 | 1.51 | 5,000 | C-8 |
| DA613 | 12.0 | .055 | .180 | 2.26 | 5,000 | C-8 |

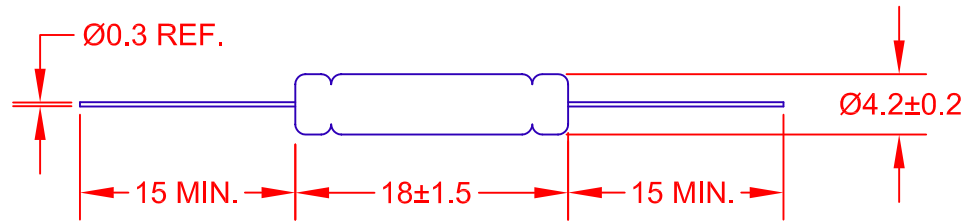

| JKL LAMP NUMBER | VOLTS RATED | AMPS ±10% | MSCP ±25% | LUMENS ±25% | AVERAGE LIFE HRS. | FILAMENT TYPE |
|-----------------|-------------|-----------|-----------|-------------|-------------------|---------------|
| DA503 | 8.0 | .055 | .120 | 1.51 | 10,000 | C-8 |

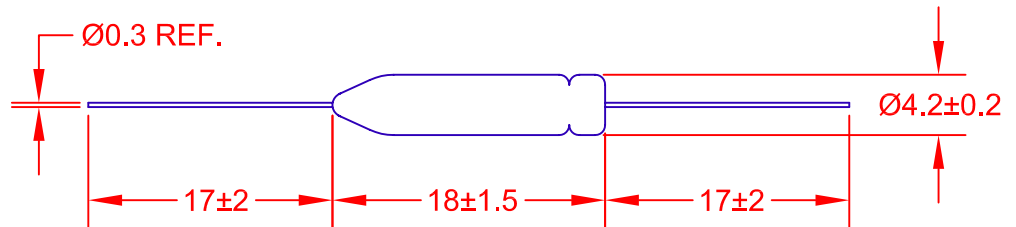


| JKL LAMP NUMBER | VOLTS RATED | AMPS ±10% | MSCP ±25% | LUMENS ±25% | AVERAGE LIFE HRS. | FILAMENT TYPE |
|-----------------|-------------|-----------|-----------|-------------|-------------------|---------------|
| DA603 | 12.0 | .055 | .180 | 2.26 | 5,000 | C-8 |

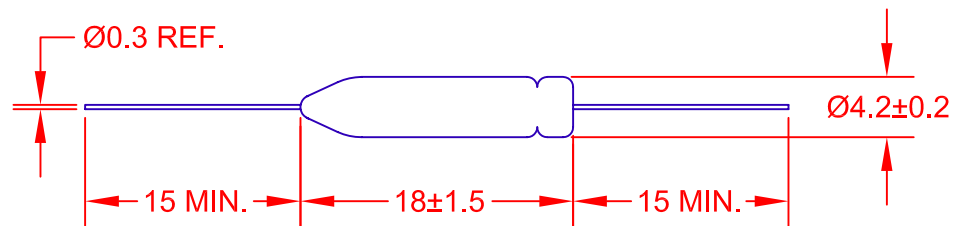

| JKL LAMP NUMBER | VOLTS RATED | AMPS ±10% | MSCP ±25% | LUMENS ±25% | AVERAGE LIFE HRS. | FILAMENT TYPE |
|-----------------|-------------|-----------|-----------|-------------|-------------------|---------------|
| DA403 | 6.3 | .070 | .080 | 1.01 | 10,000 | C-8 |

METRIC



THIRD ANGLE PROJECTION

DIMENSIONS ARE IN MILLIMETERS

TOLERANCE UNLESS OTHERWISE SPECIFIED
 1 PL +/- 0.2
 2 PL +/- 0.20
 ANGLE +/- 0

JKL COMPONENTS CORPORATION

TITLE

T-1 1/4 SPECIAL AXIAL LEAD

| | | |
|----------|---|--------------------|
| REV. NO. | DESCRIPTION/ECO NUMBER | APPVD DATE |
| A | CHANGE LEAD LENGTH ON DA603 TO 17±2 RELEASED TO CAD-CANCEL DA103, DA113, DA145, DA413, DA507 | 5/11/10 9/27/00 |

| | | |
|---|----------|---------|
| DRAWN BY | APPVD BY | DATE |
| L. WENGSTROM | L.R. | 5/11/10 |
| - CAD DRAWING - MANUAL REVISIONS NOT PERMITTED | | |

| | | | | | |
|------|----------|-----------------------|---------------|----------|--------|
| SIZE | FSCM NO. | DRAWING NO. | REVISION DATE | REV. NO. | SHEET |
| A | 55335 | AXIAL SPECIAL T-1 1/4 | 9/27/00 | A | 1 OF 1 |