


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	8/11/09

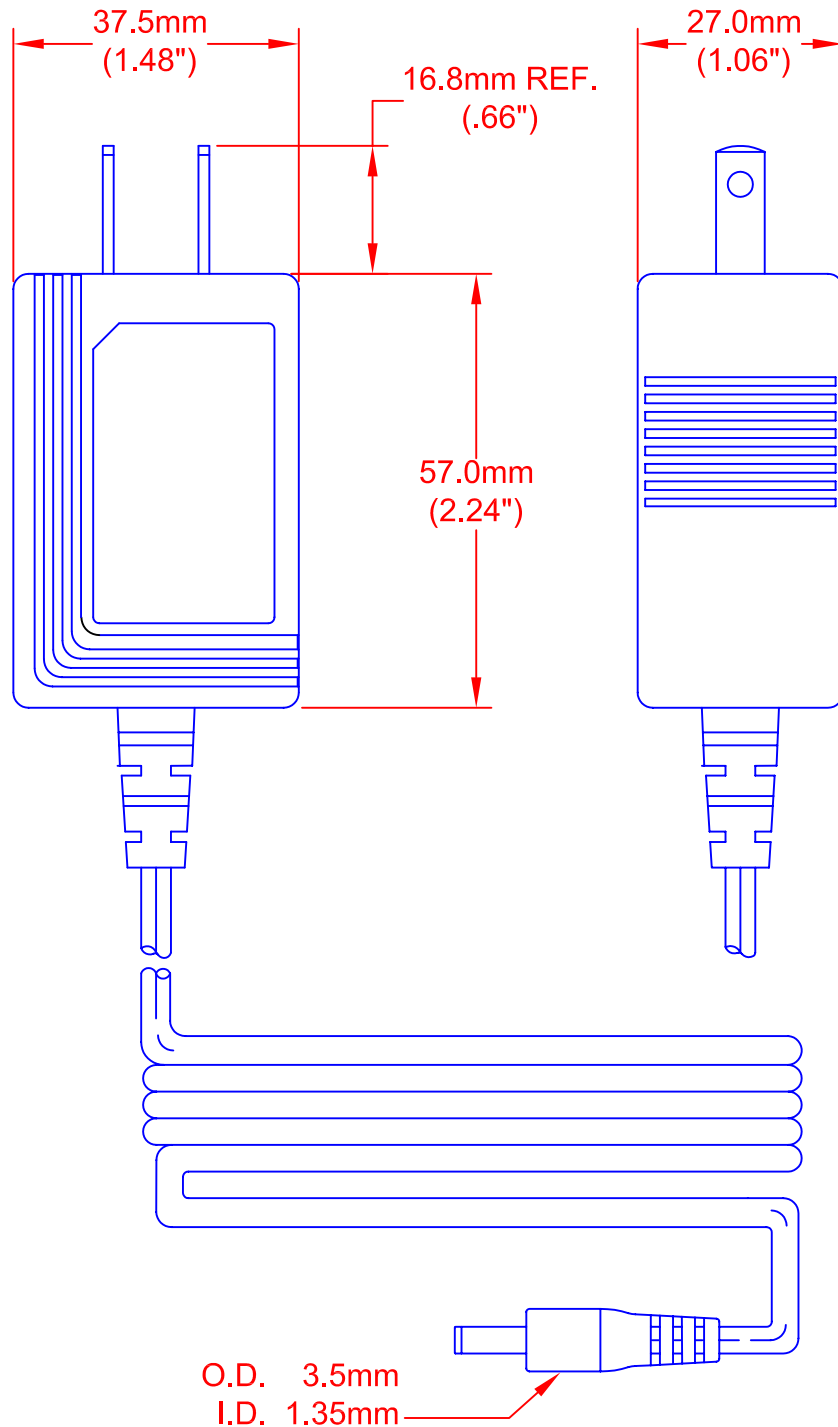

Input

Rated Input Voltage	100 V ~ 240 V ac
Input Voltage Range	90 V ~ 264 V ac
Rated Frequency	50 ~ 60 Hz
Frequency Range	47 ~ 63 Hz
Rated Input Current	1.0A RMS Max @ 115 V AC

Output

Output Voltage	24.0 V
Output Max. Current	0.5 Amps
Line Regulation	± 5%
Load Regulation	± 5%
Ripple Voltage	250m Vp-p Max
Efficiency	76% Min


Safety and EMI

HI-POT	Input to Output 3000 V AC at 10 mA for 1 minute
Insulation Resistance	100 Mohm at 50V DC
Safety Approvals	UL/C-UL E246759
EMI Standard	FCC, CISPR-22 (EN55022), CLASS B, C-TICK, CE, GB9254.GB17625.1
RoHS Compliant	Yes
Leakage Current	0.25 mA

Environmental

Storage Temperature	-40° C ~ +85° C
Operating Temperature	0° C ~ +40° C
Storage Humidity	5 ~ 95% RH Non-condensing
Operating Humidity	20 ~ 85% RH Non-condensing

JKL PART NO.: ZPS-21

METRIC  THIRD ANGLE PROJECTION	DIMENSIONS ARE IN mm & (INCHES) TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- ANGLE +/- 0	JKL COMPONENTS CORPORATION			
		TITLE 24V SWITCHING POWER ADAPTER			
DRAWN BY L. WENGSTROM	APP'VD BY L.R.	DATE 8/11/09	SIZE A	FSCM NO. 55335	DRAWING NO. ZPS-21
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED			SCALE NONE	RELEASED DATE 8/11/09	REVISION DATE
				REV. NO.	SHEET 1 OF 1