

2,000 V - 15,000 V Rectifiers
50 mA - 420 mA Forward Current
30 ns - 50 ns Recovery Time

X20FF3 - X150FF3
X20FF5 - X150FF5

AXIAL LEADED
HERMETICALLY SEALED




4

ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Part Number	Working Reverse Voltage (V _{rrm})	Average Rectified Current (I _o)		Reverse Current @ V _{rrm} (I _r)		Forward Voltage (V _f)		1 Cycle Surge Current t _p =8.3ms (I _{fsm})	Repetitive Surge Current (I _{frm})	Reverse Recovery Time (3) (T _{rr})	Thermal Impedance θ _{J-L}			Junction Cap. @50VDC @ 1kHz (C _j)
		55 °C(1)	100 °C(2)	25 °C	100 °C	25 °C					25 °C	25 °C	25 °C	
	Volts	mA	mA	µA	µA	Volts	mA	Amps	Amps	ns	°C/W	°C/W	°C/W	25 °C
X20FF3	2000	420	210	1.0	20	7.5	420	16.0	3.0	30	5	12	21.5	4.0
X50FF3	5000	150	75	1.0	20	12.5	150	10.0	1.0	30	5	12	21.5	3.0
X100FF3	10000	80	40	1.0	20	25.0	80	2.0	0.5	30	5	12	21.5	2.0
X150FF3	15000	50	25	1.0	20	37.5	50	1.6	0.3	30	5	12	21.5	2.0
X20FF5	2000	420	210	1.0	20	7.5	420	16.0	3.0	50	5	12	21.5	4.0
X50FF5	5000	150	75	1.0	20	12.5	150	10.0	1.0	50	5	12	21.5	3.0
X100FF5	10000	80	40	1.0	20	25.0	80	2.0	0.5	50	5	12	21.5	2.0
X150FF5	15000	50	25	1.0	20	37.5	50	1.6	0.3	50	5	12	21.5	2.0

(1)TL=55°C L=0.375" (2)TL=100°C L=0.375" (3)I_f=125mA, I_r=250mA, I_{rr}=63mA • Op.Temp.= -65°C to +175°C Stg.Temp.= -65°C to +200° C

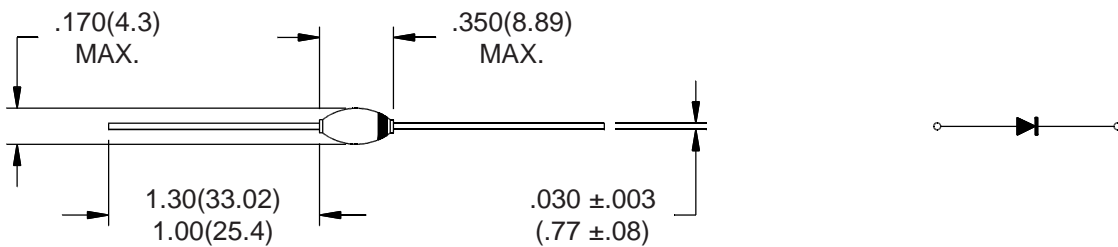

Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



VOLTAGE MULTIPLIERS INC.
 8711 W. Roosevelt Ave.
 Visalia, CA 93291

TEL 559-651-1402
 FAX 559-651-0740
 www.voltagemultipliers.com

X20FF3 - X150FF3 X20FF5 - X150FF5

