

15,000 V - 20,000 V Rectifiers

25 mA - 50 mA Forward Current

100 ns Recovery Time

X150UFG
X200UFG

AXIAL LEADED
HERMETICALLY SEALED




4

ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Part Number	Working Reverse Voltage (V _{rwm})	Average Rectified Current (I _o)		Reverse Current @ V _{rwm} (I _r)		Forward Voltage (V _f)		1 Cycle Surge Current t _p =8.3ms (I _{fsm})	Repetitive Surge Current (I _{frm})	Reverse Recovery Time (3) (T _{rr})	Thermal Impedance θ _{J-L}			Junction Cap. @50VDC @ 1kHz (C _j)
		55 °C(1)	100 °C(2)	25 °C	100 °C	25 °C					25 °C	25 °C	25 °C	
	Volts	mA	mA	μA	μA	Volts	mA	Amps	Amps	ns	°C/W	°C/W	°C/W	μF
X150UFG	15000	50	25	1.0	20	22.0	100	3	0.5	100	5	12	21.5	2.0
X200UFG	20000	25	13	1.0	20	30.0	50	2	0.5	100	5	12	21.5	2.0

(1)TL=55°C L=0.375" (2)TL=100°C L=0.375" (3)I_f=125mA, I_r=250mA, I_{rr}=63mA • Op.Temp.= -65°C to +175°C Stg.Temp.= -65°C to +200° C

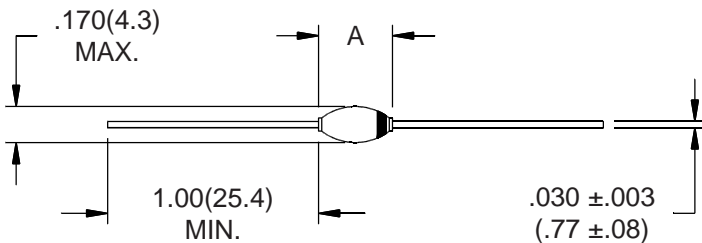

Part	A
X150UFG	.360(9.14) MAX.
X200UFG	.380(9.65) MAX.



Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



VOLTAGE MULTIPLIERS INC.
8711 W. Roosevelt Ave.
Visalia, CA 93291

TEL 559-651-1402
FAX 559-651-0740
www.voltagemultipliers.com

X150UFG X200UFG

