

DESCRIPTION: 2mm HEADER STRIP STRAIGHT

"L" = NO. OF PINS/ROW X .079 - .079


**2663 YY 01RP2**

SERIES \_\_\_\_\_  
 2663 = SINGLE ROW

POSITIONS \_\_\_\_\_  
 SINGLE- INCRMENTS OF 1  
 (01-36)


TYPE \_\_\_\_\_  
 01 = STRAIGHT

PLATING \_\_\_\_\_  
 P2 = GOLD FLASH ENTIRE CONTACT

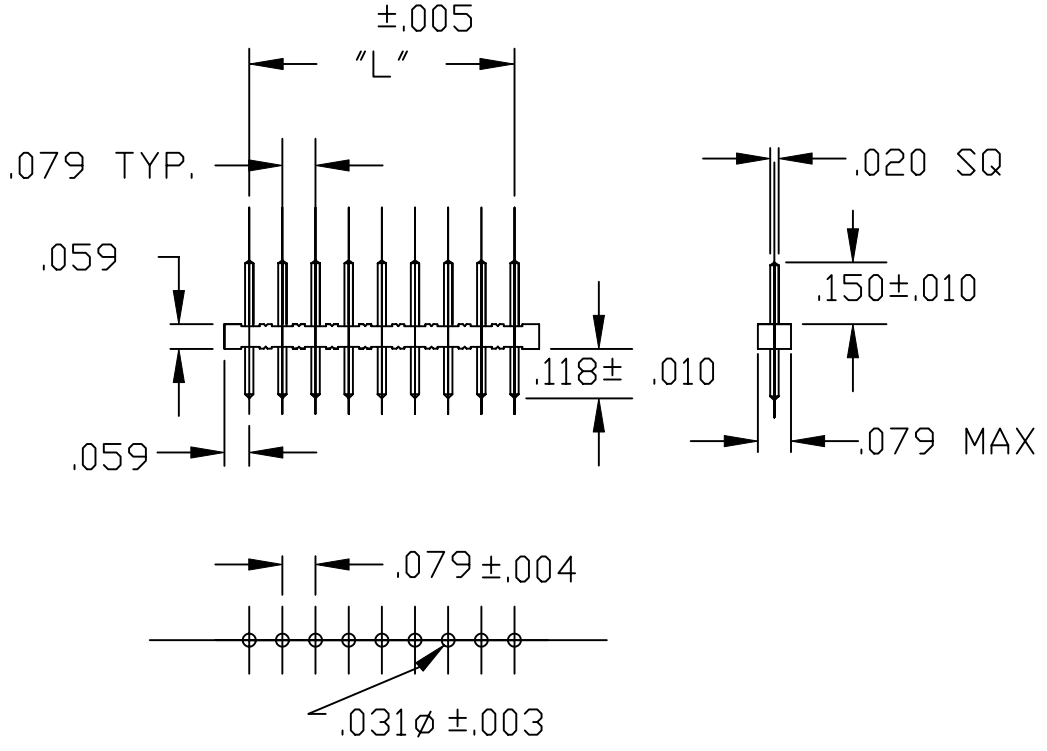

MATERIALS:  
 HOUSING: NYLON 6T - UL 94V-0  
 COLOR: BLACK  
 CONTACTS: COPPER ALLOY  
 PLATING: GOLD FLASH ENTIRE CONTACT  
 RoHS COMPLIANT

CURRENT RATING: 1 AMP  
 INSUALTOR RESISTANCE: 5000 MEGOHMS MIN.  
 DIELECTRIC WITHSTANDING: 500V AC  
 OPERATING TEMP: -40°C TO +105°C  
 MAX PROCESSING TEMP: 260°C FOR  
 10 SECONDS

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 1-27-06
	<h1>NorComp</h1>		CHECKED:	DATE:
SCALE:			SHEET 1 OF 1	REV 2
DWG NO.			<b>2663YY01RP2</b>	