


DESCRIPTION: DIP SOLDER FILTERED COMBILOCK D-SUB

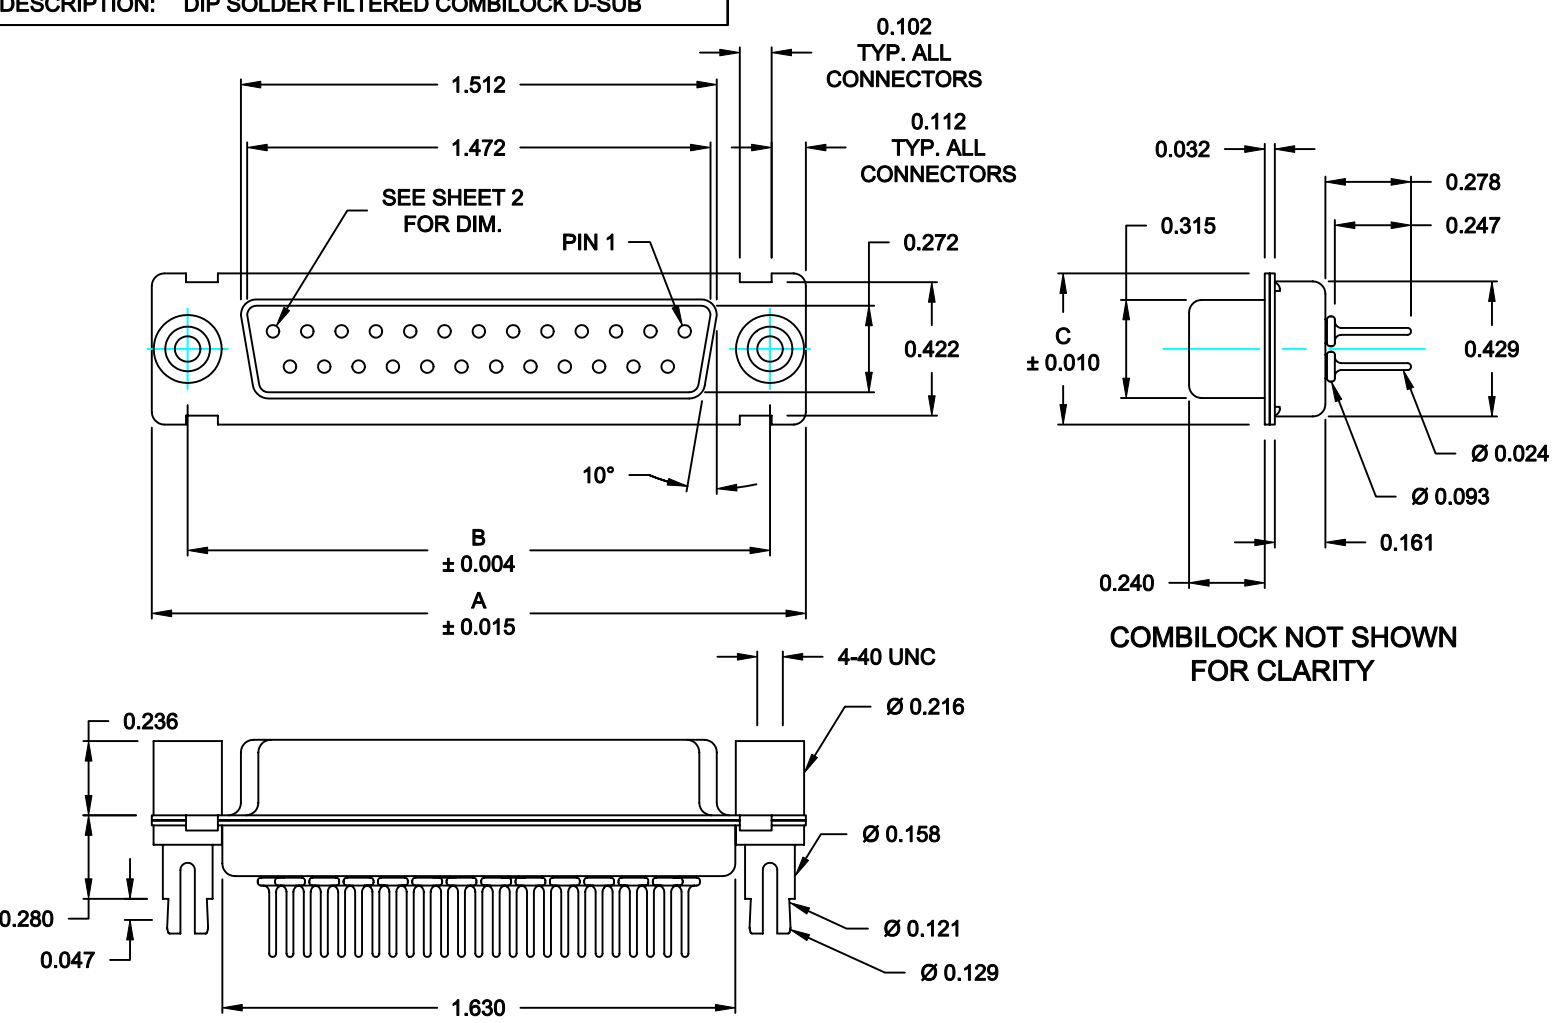

DIMENSIONS (IN.)			
No. OF PINS	A	B	C
9	1.204	0.984	0.480
15	1.535	1.312	0.480
25	2.078	1.850	0.480
37	2.724	2.500	0.480
50	2.622	2.405	0.598

477-YYY-212RYY1

SERIES
POSITIONS
009
015
025
037
050
GENDER
1 = MALE
2 = FEMALE
TERMINATION
1 = VERTICAL DIP SOLDER
SHELL PLATING
2 = TIN
HARDWARE OPTIONS
00 = NO HARDWARE
31 = COMBILOCK
PLATION OPTIONS
1 = GOLD FLASH

SPECIFICATIONS:

MATERIALS:






SHELL: STEEL, TIN PLATED
INSULATOR: UL 94V-0 RATED PBTP
GLASS-FIBER REINFORCED

ELECTRICALS:

INDIVIDUAL CAPACITOR VALUE = 1000 pF
OTHER VALUES AVAILABLE: CONSULT FACTORY
CURRENT RATING: 5 AMPS
CONTACT RESISTANCE: <10 mOHMS
INSULATOR RESISTANCE: 1000 OHMS
VOLTAGE: 1 KV / AC
TEMPERATURE: -55°C TO +125°C

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH		DATE: 10-02-06	
		CHECKED: X		DATE: X	
NorComp	SCALE: N.T.S.		SHEET 1		OF 2
	DWG NO.		477-YYY-212RYY1		
		REV 1			

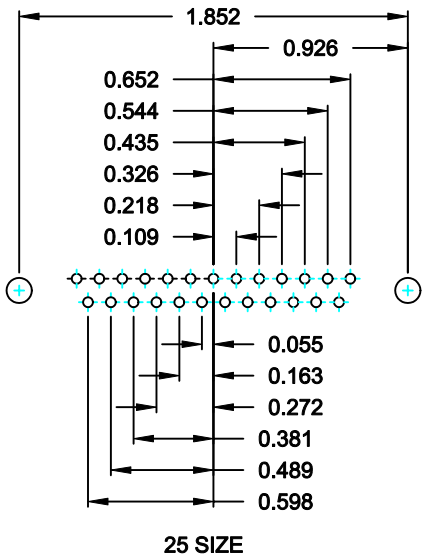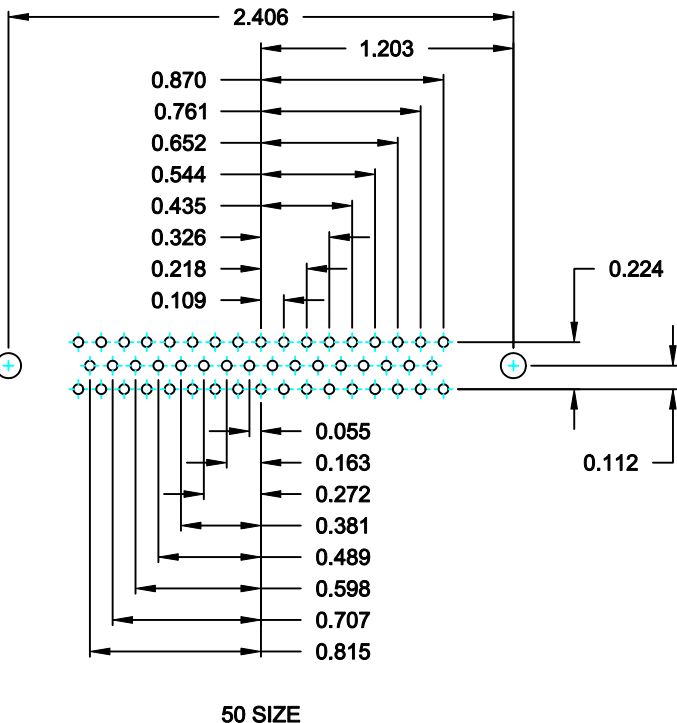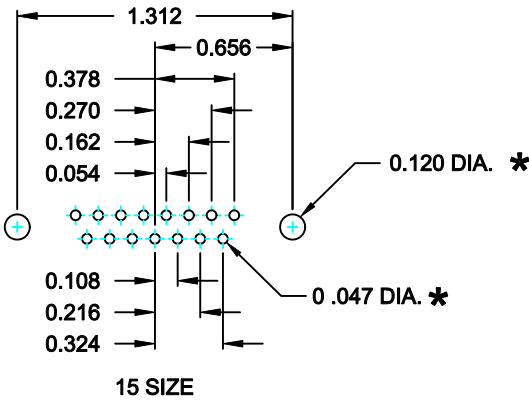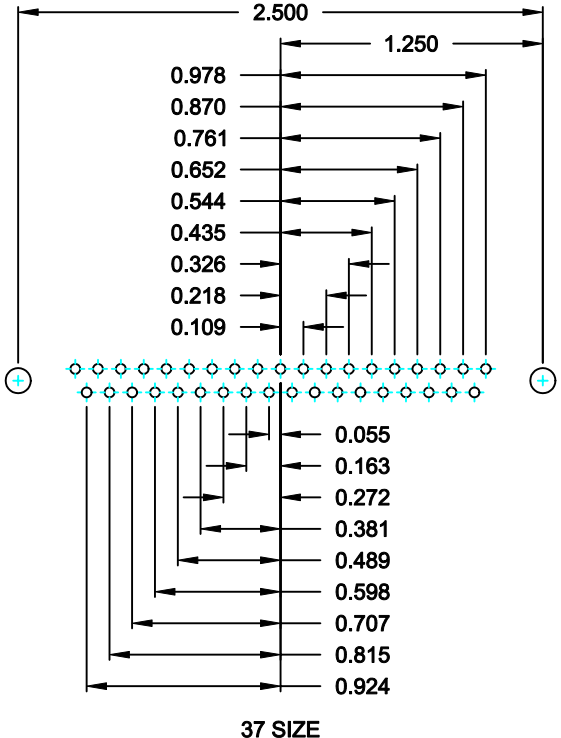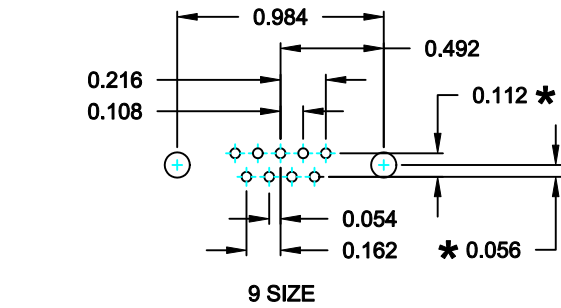

* TYP. ON ALL PATTERNS

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH		DATE: 10-03-06		
		CHECKED: X		DATE: X		
NorComp		SCALE: FULL		SHEET 2 OF 2		REV 1
		DWG NO. 477-YYY-212RYY1				