
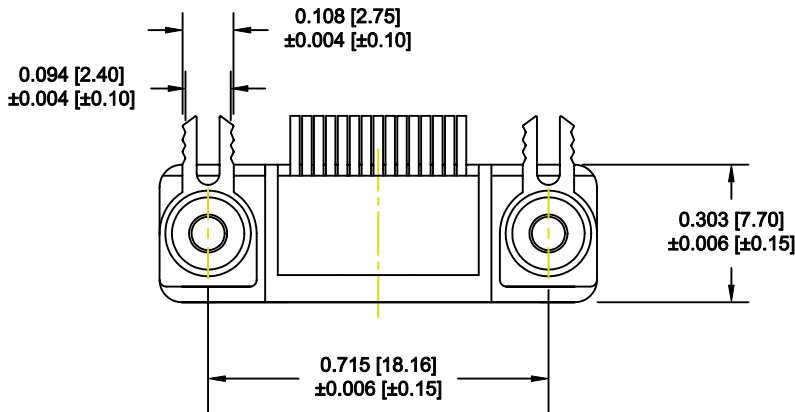
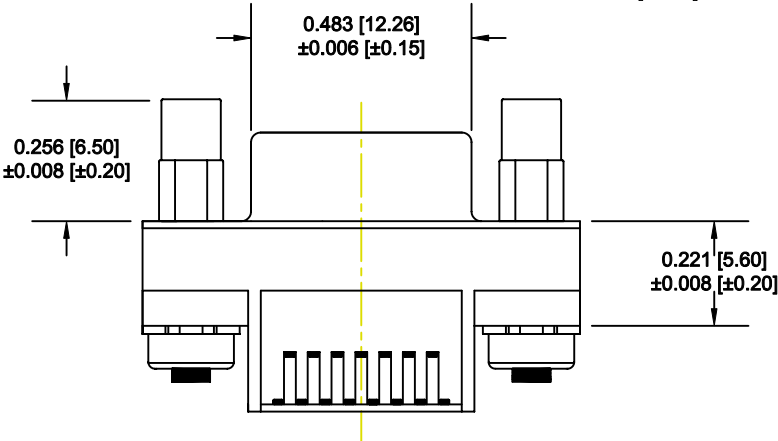


DESCRIPTION: MICRO D-SUB CONNECTOR - MALE - RIGHT ANGLE

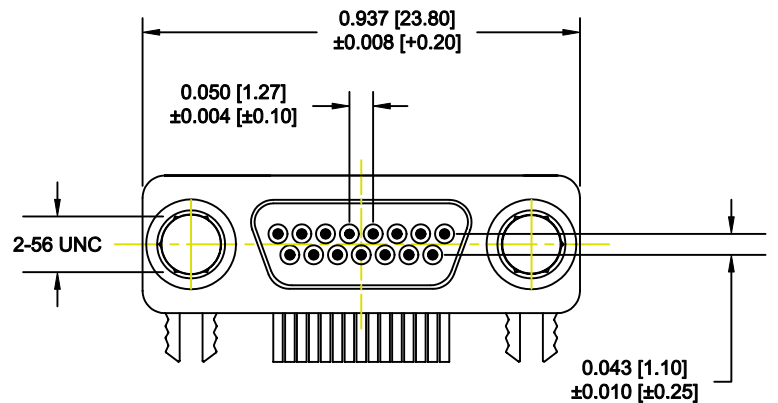

## ELECTRICAL

CONTACT CURRENT RATING: 1 AMP  
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC  
INSULATION RESISTANCE: 1000 MOhms MIN.  
CONTACT RESISTANCE: 45 MILLI Ohms MAX.  
OPERATING TEMPERATURE: -55°C TO +85°C


## MATERIALS

CONTACTS: COPPER ALLOY  
INSULATOR: THERMOPLASTIC 94V-0  
SHELL: COLD ROLLER STEEL

## FINISHES

CONTACT: 15 μ" MIN. GOLD ON MATING END  
TIN ON TERMINATION END  
ALL UNDERPLATING NICKEL  
SHELL: BRIGHT TIN OVER COPPER

## HARDWARE

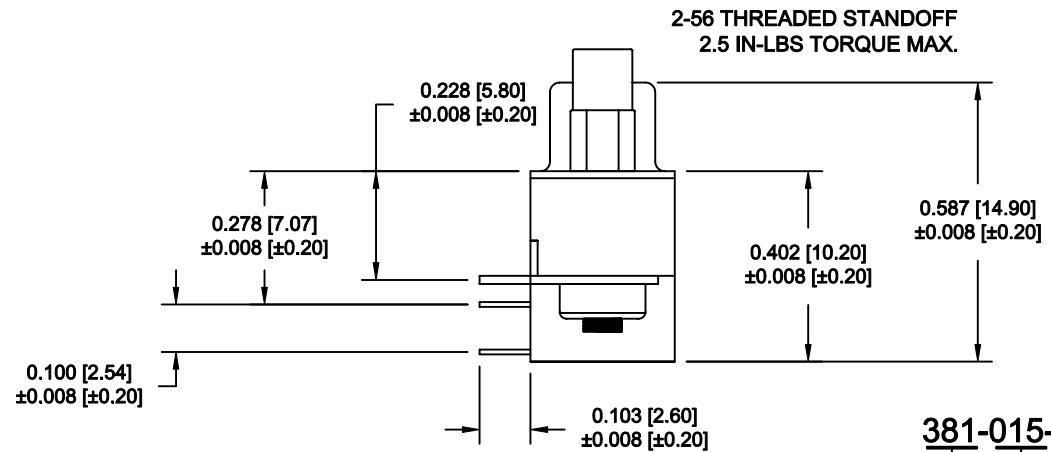

381-015-112L5Y5

SERIES  
POSITIONS  
GENDER  
1 = MALE  
TERMINATION  
1 = DIP SOLDER  
SHELL PLATING  
2 = TIN  
RoHS COMPLIANT  
HARDWARE OPTIONS  
1 = BOARDLOCKS ONLY  
6 = STANDOFFS & BOARDLOCKS  
PLATING OPTIONS  
5 = 15μ" GOLD PLATING

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

M. SIGMON

DATE:

08-22-11

CHECKED:

DATE:

SCALE:

2.5 : 1

SHEET

OF

1 2

REV


3

DWG NO.

381-015-112L565



RoHS COMPLIANT

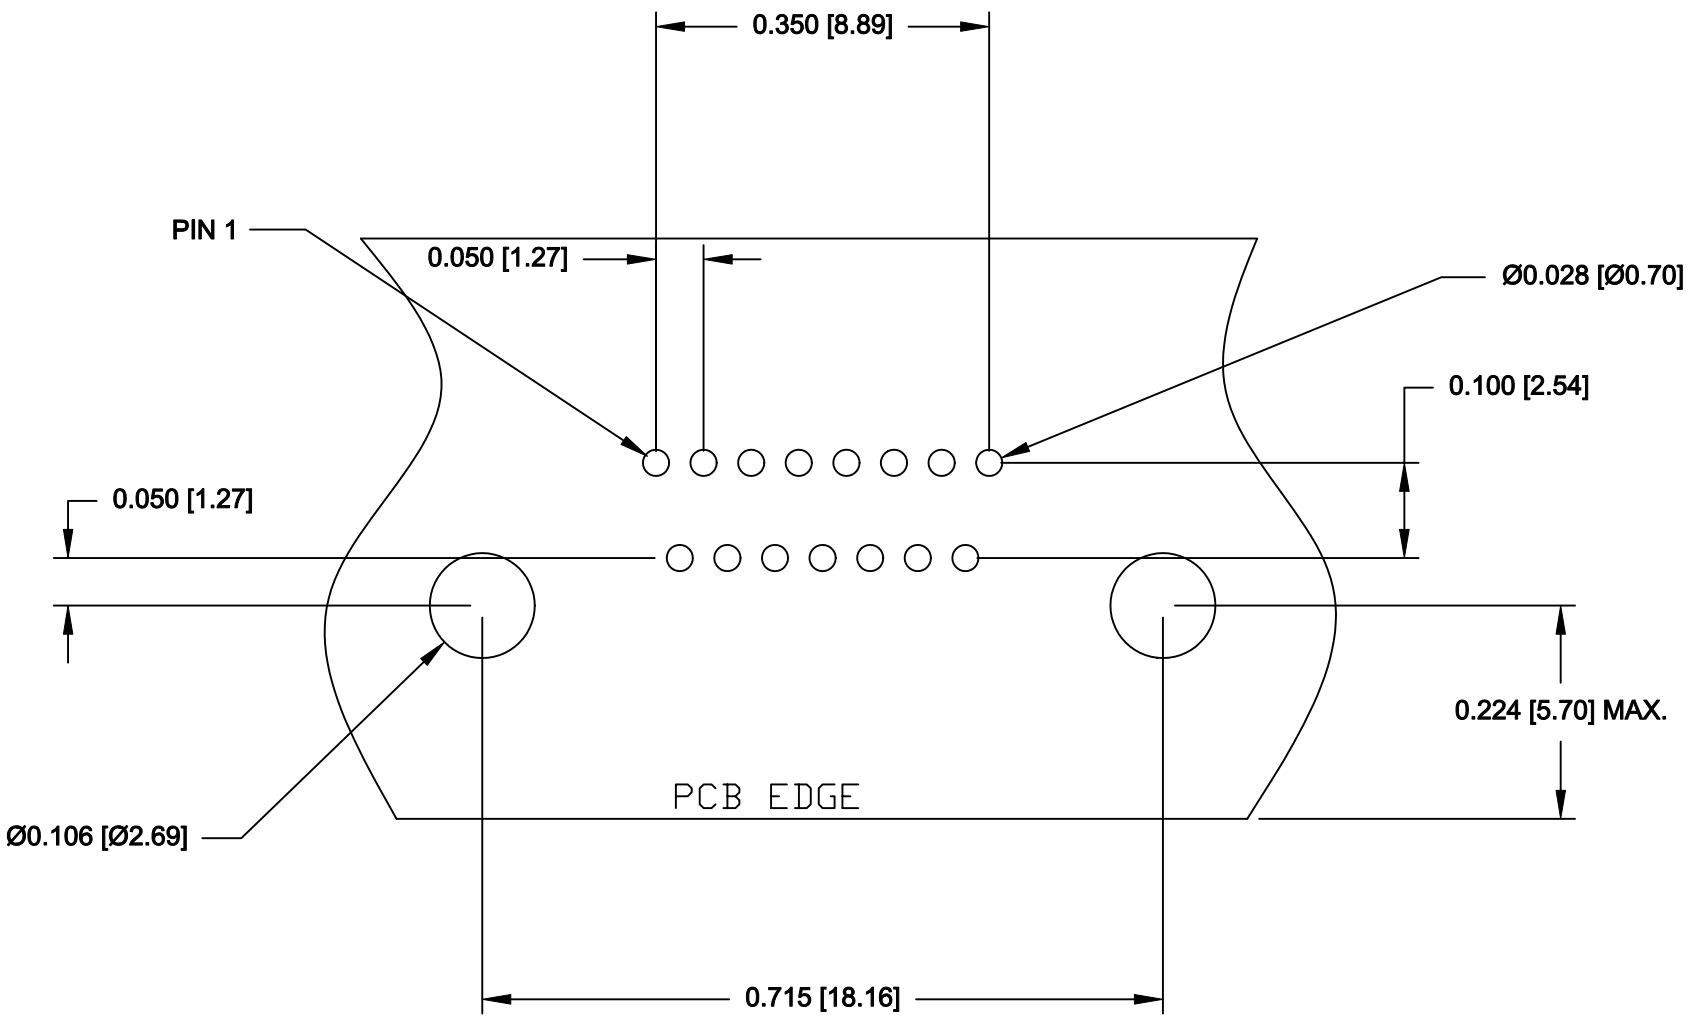NorComp



RECOMMENDED PC BOARD LAYOUT  
(15 POSITION ONLY) TOLERANCE  $\pm 0.002$  [ $\pm 0.05$ ]

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		DATE: 08-22-11	
		CHECKED:		DATE:	
		SCALE: 5 : 1	SHEET 2		OF 2
		REV 3			
		DWG NO. 381-015-112L565			

RoHS COMPLIANT

NorComp