

1.091

DESCRIPTION: COAXIAL - VERTICAL BOARD - MALE

#### **SPECIFICATIONS:**

**ELECTRICAL:** 

5,000 MegOHMS Min. **INSULATOR RESISTANCE:** 1,000VAC r.m.s. **DIELECTRIC WITHSTANDING:** -55° C ~ +125° C **OPERATING TEMPERATURE:** 30 MilliOHMS Max. **CONTACT RESISTANCE: 50 OHM** 

**MECHANICAL:** 

4.5 Kg Max. CONTACT INSERTION FORCE: 0.3Kg Min. **CONTACT SEPARATOR FORCE:** 

**MATERIALS:** 

CONTACTS:

**BRASS INSULATOR:** PBT UL94V-0 RATED. 230°C PROCESS TEMP.

SHELL:

STEEL


FINISH:

**NICKEL** 

#### 6833W3103L001

00 = 50 OHM COAXIAL

## ROHS COMPLIANT



# NorComp

DRAWN:  C. SMITH		DATE:	09-21-06	
CHECKED: X		DATE:	X	
SCALE:	SHEET	OF		REV


DWG NO.


N.T.S.

6833W3103L001

**DESCRIPTION: 683 SERIES CONTACTS** 

NOTE: COAXIAL CONTACTS COME PRE-LOADED INTO INSULATORS

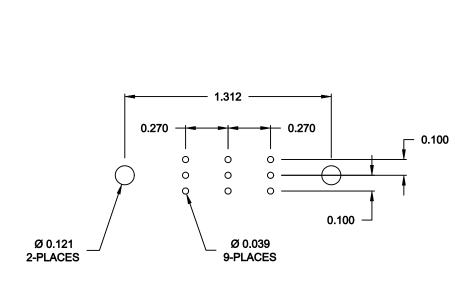

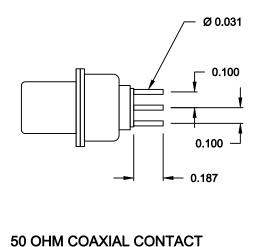

RECOMMENDED PCB LAYOUT

### RoHS COMPLIANT

