

DESCRIPTION: POWER - RIGHT ANGLE - MALE

SPECIFICATIONS:

ELECTRICAL:
INSULATOR RESISTANCE: 5,000 MegOHMS Min.
DIELECTRIC WITHSTANDING: 1,000VAC r.m.s.
OPERATING TEMPERATURE: -55° C ~ +125° C
CONTACT RESISTANCE: 30 MilliOHMS Max.
POWER PINS: 40 AMPS

MECHANICAL:
CONTACT INSERTION FORCE: 4.5 Kg Max.
CONTACT SEPARATOR FORCE: 0.3Kg Min.



MATERIALS:
CONTACTS: BRASS
INSULATOR: PBT UL94V-0 RATED,
230°C PROCESS TEMP.
SHELL: STEEL
BOARD LOCK: BRASS, NICKEL PLATED
CINCHNUT: BRASS, NICKEL PLATED
BRACKET: STEEL, NICKEL PLATED

FINISH:
SHELL: NICKEL

6848W8103L461



46 = 4-40 INSERTS /
BOARD LOCKS

RoHS COMPLIANT

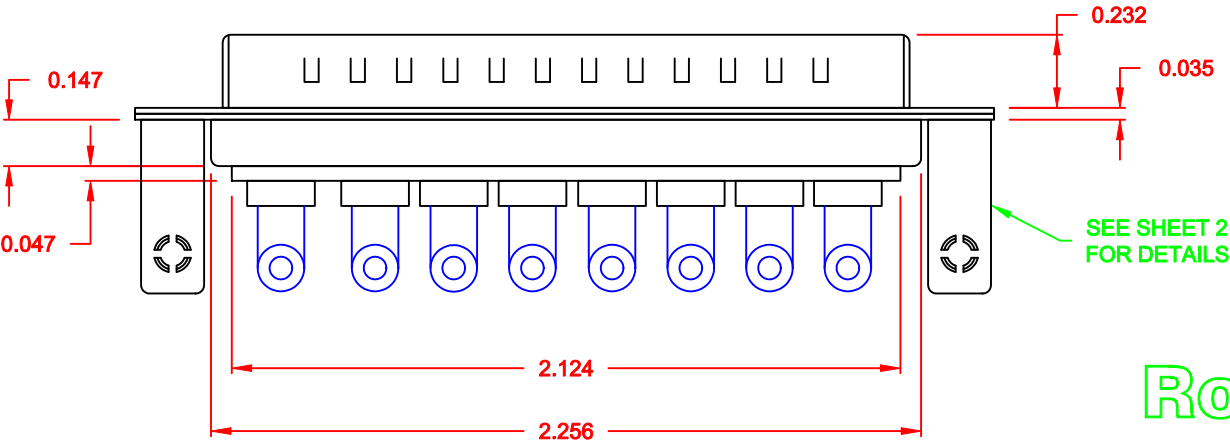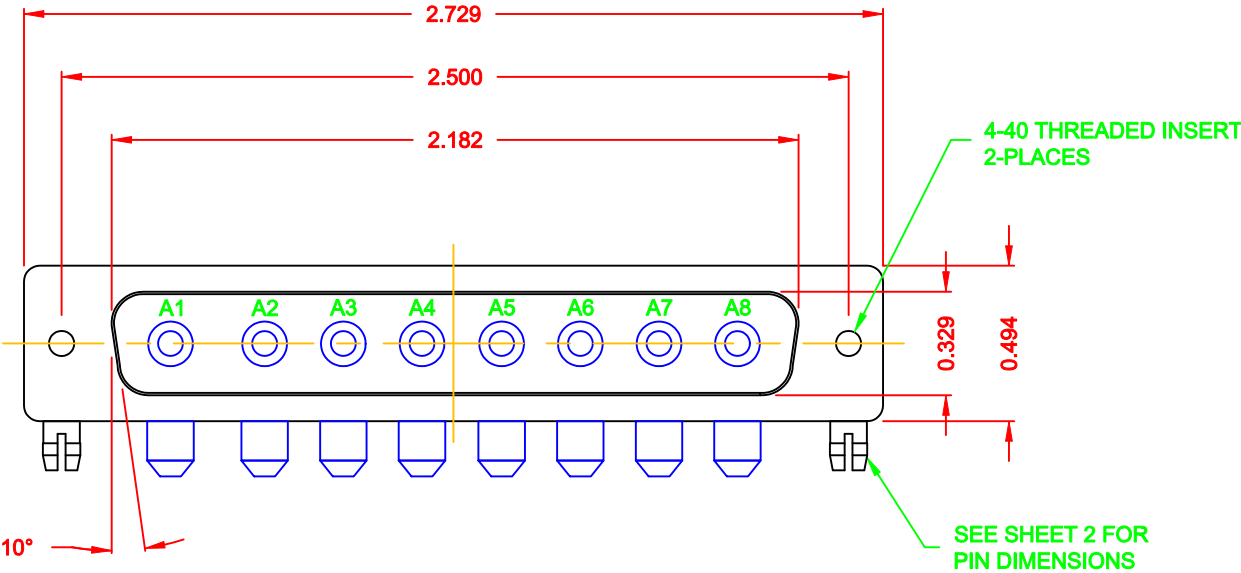


 NorComp	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: C. SMITH		DATE: 10-06-06	
			CHECKED:		DATE:	
			SCALE: 1.5 = 1	SHEET 1	OF 2	REV 3
			DWG NO. 6848W8103L461			

NOTE:
POWER CONTACTS COME
PRE-LOADED INTO INSULATORS

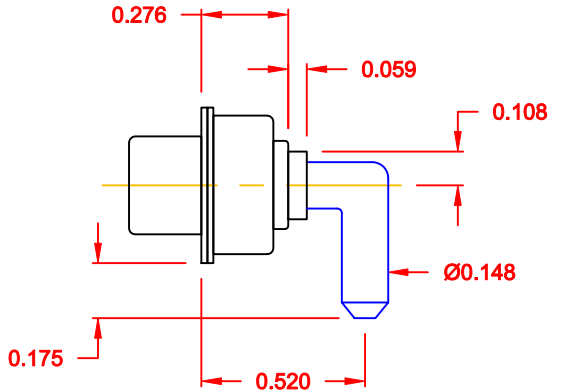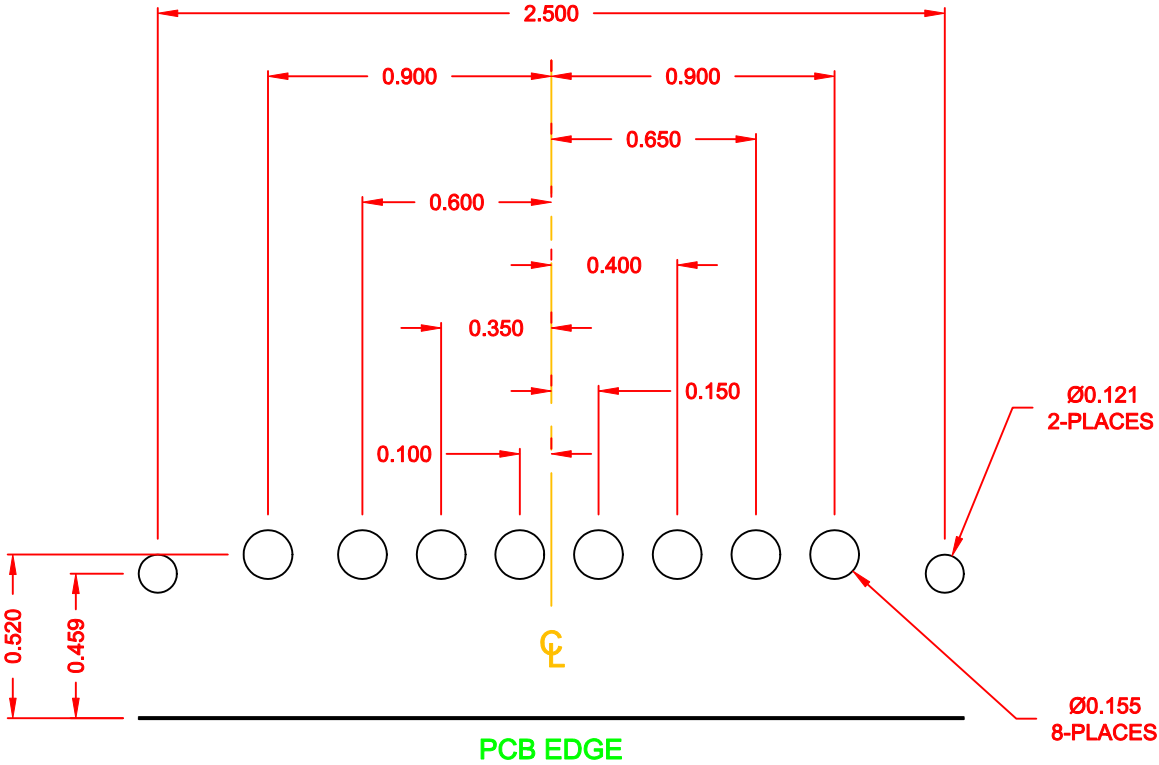

40 AMP POWER CONTACT

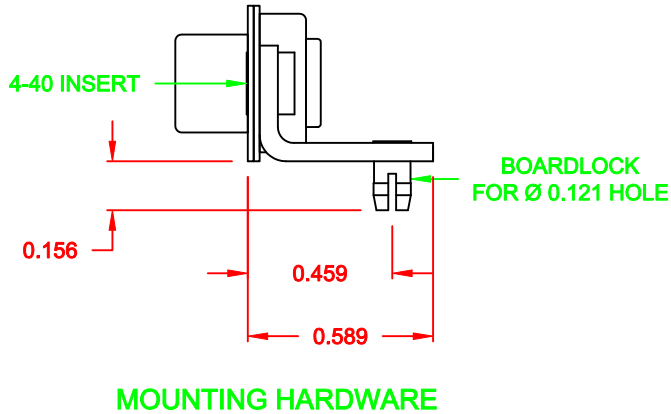

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH		DATE: 10-06-06	
		CHECKED:		DATE:	
NorComp		SCALE: 1.5 = 1	SHEET 2		OF 2
				REV 3	
		DWG NO. 6848W8103L461			