
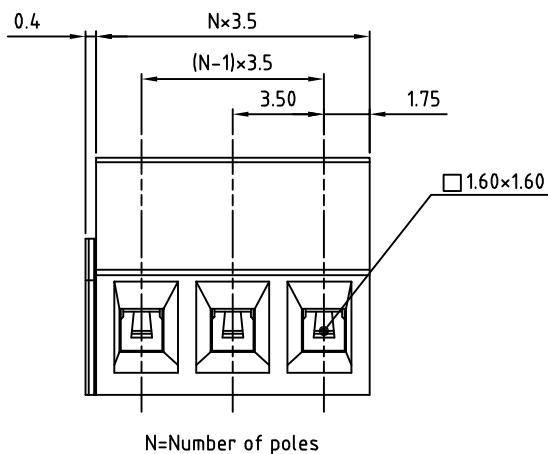
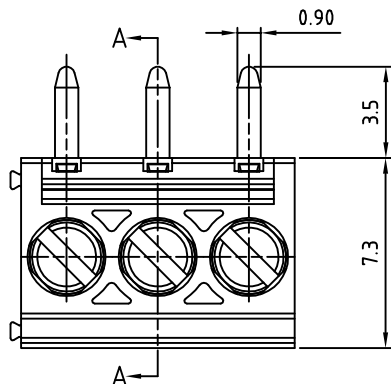


SECTION A-A

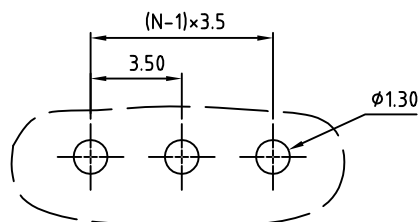

P.C.B. LAYOUT

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material

- Insulating body: Thermoplastic (UL94V-0)
- Terminal screw: Steel Zinc plating "-" slot type
- Terminal body: Brass, Ni plated
- Contact: Brass, Tin plated

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
 - Solid wire(AWG): 16-24
 - Stranded wire(AWG): 16-24
- Torque(Lb-In): 1.7
- Screw: M2
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: 

RoHS Compliant

PART NUMBER:

OSTERXX0151

No. of Poles

02: 2 Poles

03: 3 Poles

... ..

24: 24 Poles

COLOR

0: Black

5: Green (Standard)

6: Blue

8: Grey



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTER 3.5 Series 90D, 2-24p			
PART NO.	OSTERXX0151			DWG NO.	OSTERXX0151.DWG
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Aaron 2006.10.04	Aaron 2006.10.04		UNIT: mm SCALE: NONE SHEET: 01/01 REV.: B
					X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°