

| SIGN                                           | DATE | DESCRIPTION | APPROVER |
|------------------------------------------------|------|-------------|----------|
|                                                |      |             |          |
| THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!! |      |             |          |




### Material

- Terminal body  
(metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Wire guard: Stainless steel
- Insulator (housing): Thermoplastic (UL94V-0)

### Electrical UL/cUL

- Voltage rating: 400VAC/400VAC
- Current rating: 8A/8A
- Wire range:  
Solid wire(AWG): none/14-22  
Stranded wire(AWG): 14-22/14-22
- Torque(Lb-In): 3.5
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.8KV
- Operating temperature: -30°C to +105°C
- Safety Approval: 

RoHS Compliant

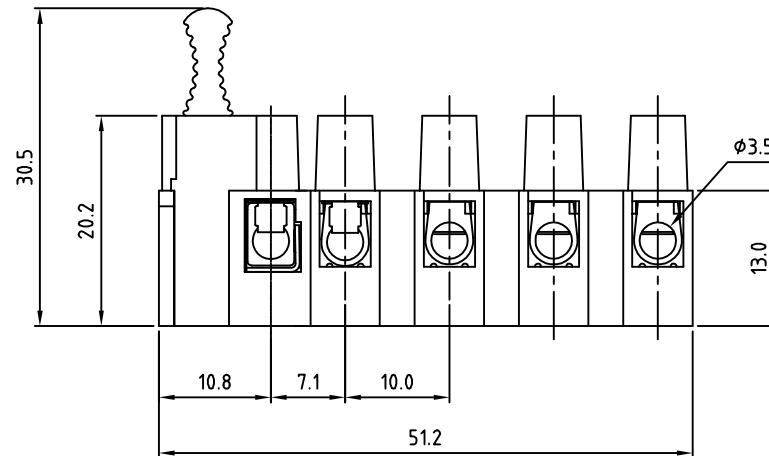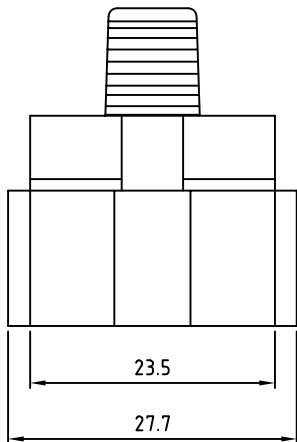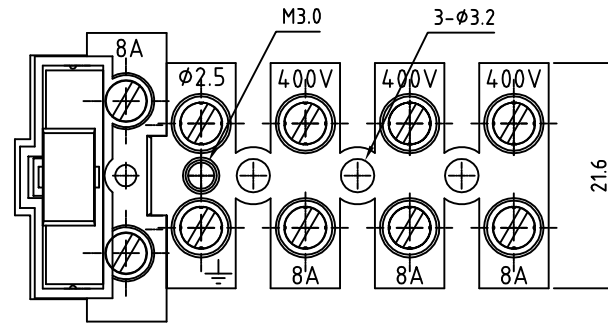

PART NUMBER:

OSTTM051900

COLOR

- 8: Grey
- 9: White (Standard)



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

| TITLE                 |                      | OSTTM - series 5 Poles with handle |                      |                                                                                       |             |            |
|-----------------------|----------------------|------------------------------------|----------------------|---------------------------------------------------------------------------------------|-------------|------------|
| PART NO.              | OSTTM051900          | DWG NO.                            |                      | OSTTM051900.DWG                                                                       |             |            |
| APPROVED              | CHECKED              | DESIGNED                           | DRAWN                | CUST NO.                                                                              | Tolerance   |            |
| Shi Jun<br>2006.10.20 | Marvin<br>2006.06.24 | Marvin<br>2006.06.24               | Marvin<br>2006.06.24 |  | UNIT: mm    | X. ±0.50   |
|                       |                      |                                    |                      |                                                                                       | SCALE: NONE | X.X ±0.30  |
|                       |                      |                                    |                      |                                                                                       | REV.: D     | X.XX ±0.10 |
|                       |                      |                                    |                      |                                                                                       |             | X° ±1°     |

SHEET: 01/01