

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Clamp: Brass (Cu Zn) Ni plated
- Terminal screw: Steel Zinc plating "+/-" slot type
- Female contact: PhBz,tin plated
- Terminal housing: Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300V
- Current rating: 10A
- Wire range:
Solid wire(AWG): 12-26
Stranded wire(AWG): 12-26
- Torque: 3.5Lb-In
- Screw: M3.0
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to+115°C
- Safety Approval: 

RoHS Compliant

Part Number:

OSTTXXX0200

No. of Poles

02: 2 Poles

03: 3 Poles

... ..
24 24 Poles



COLOR

0: Black (Standard)

5: Green

6: Blue

8: Grey

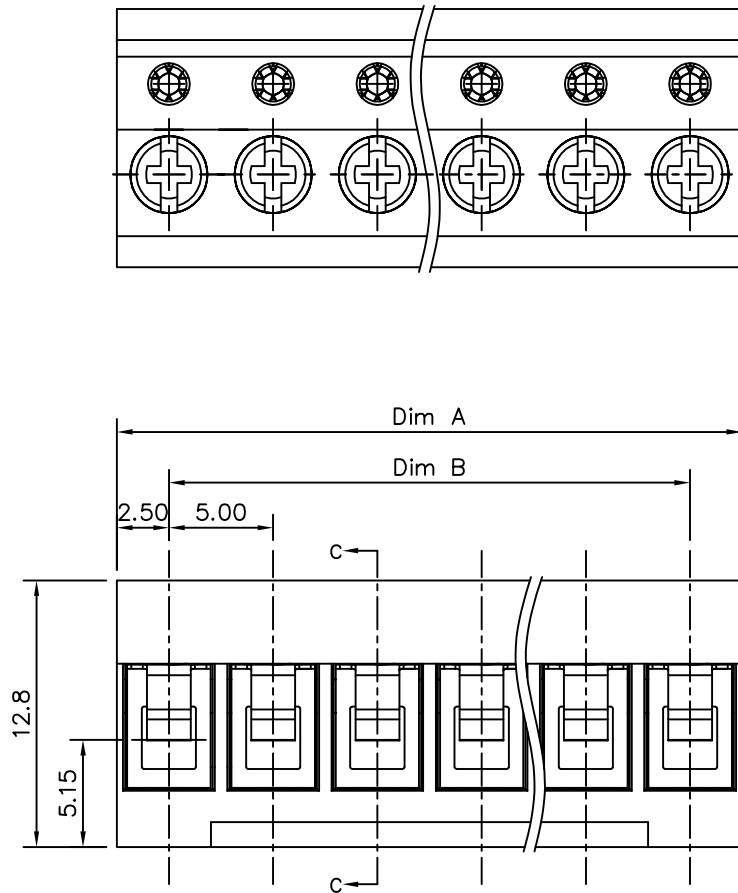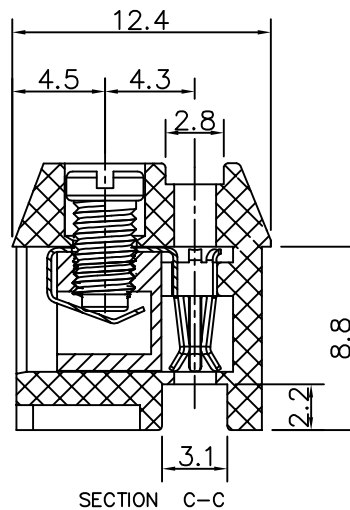

N = Number of poles

Dim A=Nx5.0

Dim B=(N-1)x5.0

Poles	Dim A	Dim B
2-6p	±0.15	±0.15
7-12p	±0.20	±0.20
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

 ON-SHORE TECHNOLOGY, INC.							
TITLE		OSTTX-5.0mm Series "+/-" screw, square hole					
PART NO.		OSTTXXX0200		DWG NO.		OSTTXXX0200.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
Jacke	Jacke	Jacke	Jacke				UNIT: mm
2009.08.10	2009.08.10	2009.08.10	2009.08.10	SHEET: 01/01	SCALE: NONE		X.X ±0.30
				REV.: B			X.XX ±0.10
							X' ±1"