

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Terminal body
(metal housing): Brass(CuZn)
- Terminal screw: Brass Zinc plating "-" slot type
- Wire guard: PhBz (CuSn)
- With flange screw: M2.5 steel
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 20A
- Wire range:
Solid wire(AWG): 12-24
Stranded wire(AWG): 12-24
- Torque: 4.3 Lb-In
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Safety Approval: 

RoHS Compliant

PART NUMBER:

OSTVHXX5152

No. of Poles

02 2 Poles

03 3 Poles

... ..

24 24 Poles


COLOR

0: Black




5: Green (Standard)

6: Blue

8: Grey

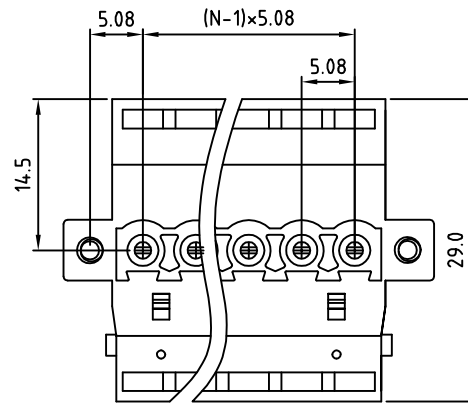

N=Number of poles

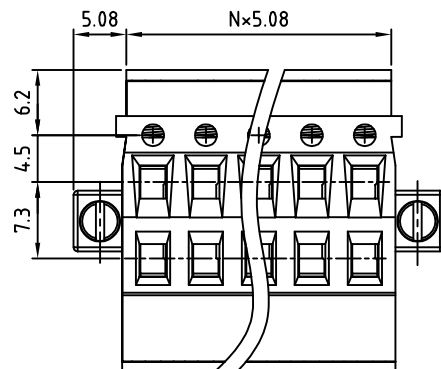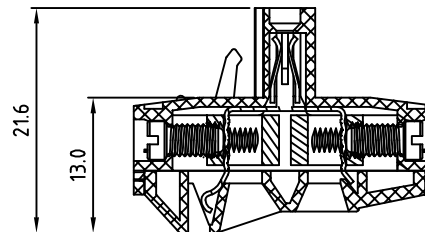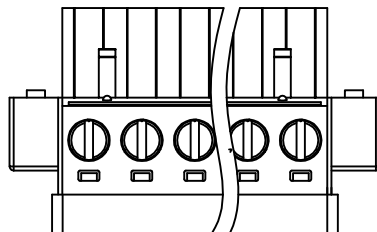

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



S	TITLE		OSTVH-5.08mm Series With flange					
	PART NO.			OSTVHXX5152		DWG NO.	OSTVHXX5152.DWG	
	APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
	Shi Jun 2006.10.25	Marvin 2005.10.25	Marvin 2005.10.25	Marvin 2005.10.25		UNIT: mm	X. ±0.50	
						SCALE: NONE	X.X ±0.30	
SHEET: 01/01					REV: C	X.XX ±0.10		
						X° ±1°		