

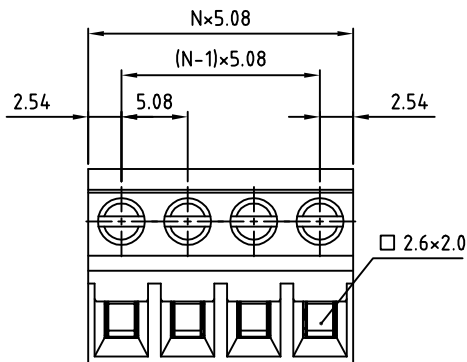


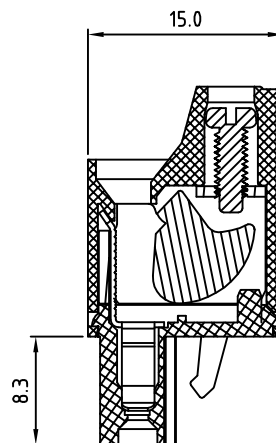

N=Number of poles

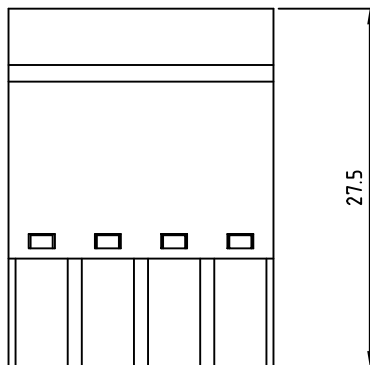

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material:

- Terminal body
- (metal housing): Steel
- Terminal screw: Steel Zinc plating "-" slot type.
- Wire guard: PhBz(CuSn), Tin plated.
- Insulator(housing): Thermoplastic (UL94V-0)

Electrical:

- Voltage rating: cULus / TUV 300V / 300V
- Current rating: 20A / 20A
- Wire range: 0.34-2.5mm²
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque: 3.5 Lb-In / 0.4N.m
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV / 2.5KV
- Operating temperature: -30°C to +105°C
- Safety Approval: RoHS Compliant

PART NUMBER:

OSTVMXX5550

No. of Poles	COLOR
02 2 Poles	0: Black
03 3 Poles	5: Green (Standard)
... ..	6: Blue
24 24 Poles	8: Grey



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE	OSTVM 5.08mm Series						
PART NO.	OSTVMXX5550			DWG NO.	OSTVMXX5550.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
Shi Jun 2006.10.25	Shi Jun 2006.10.25	Tony 2006.10.25	Tony 2006.10.25		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
					REV: D	X.XX	±0.10
				SHEET: 01/01		X°	±1°