


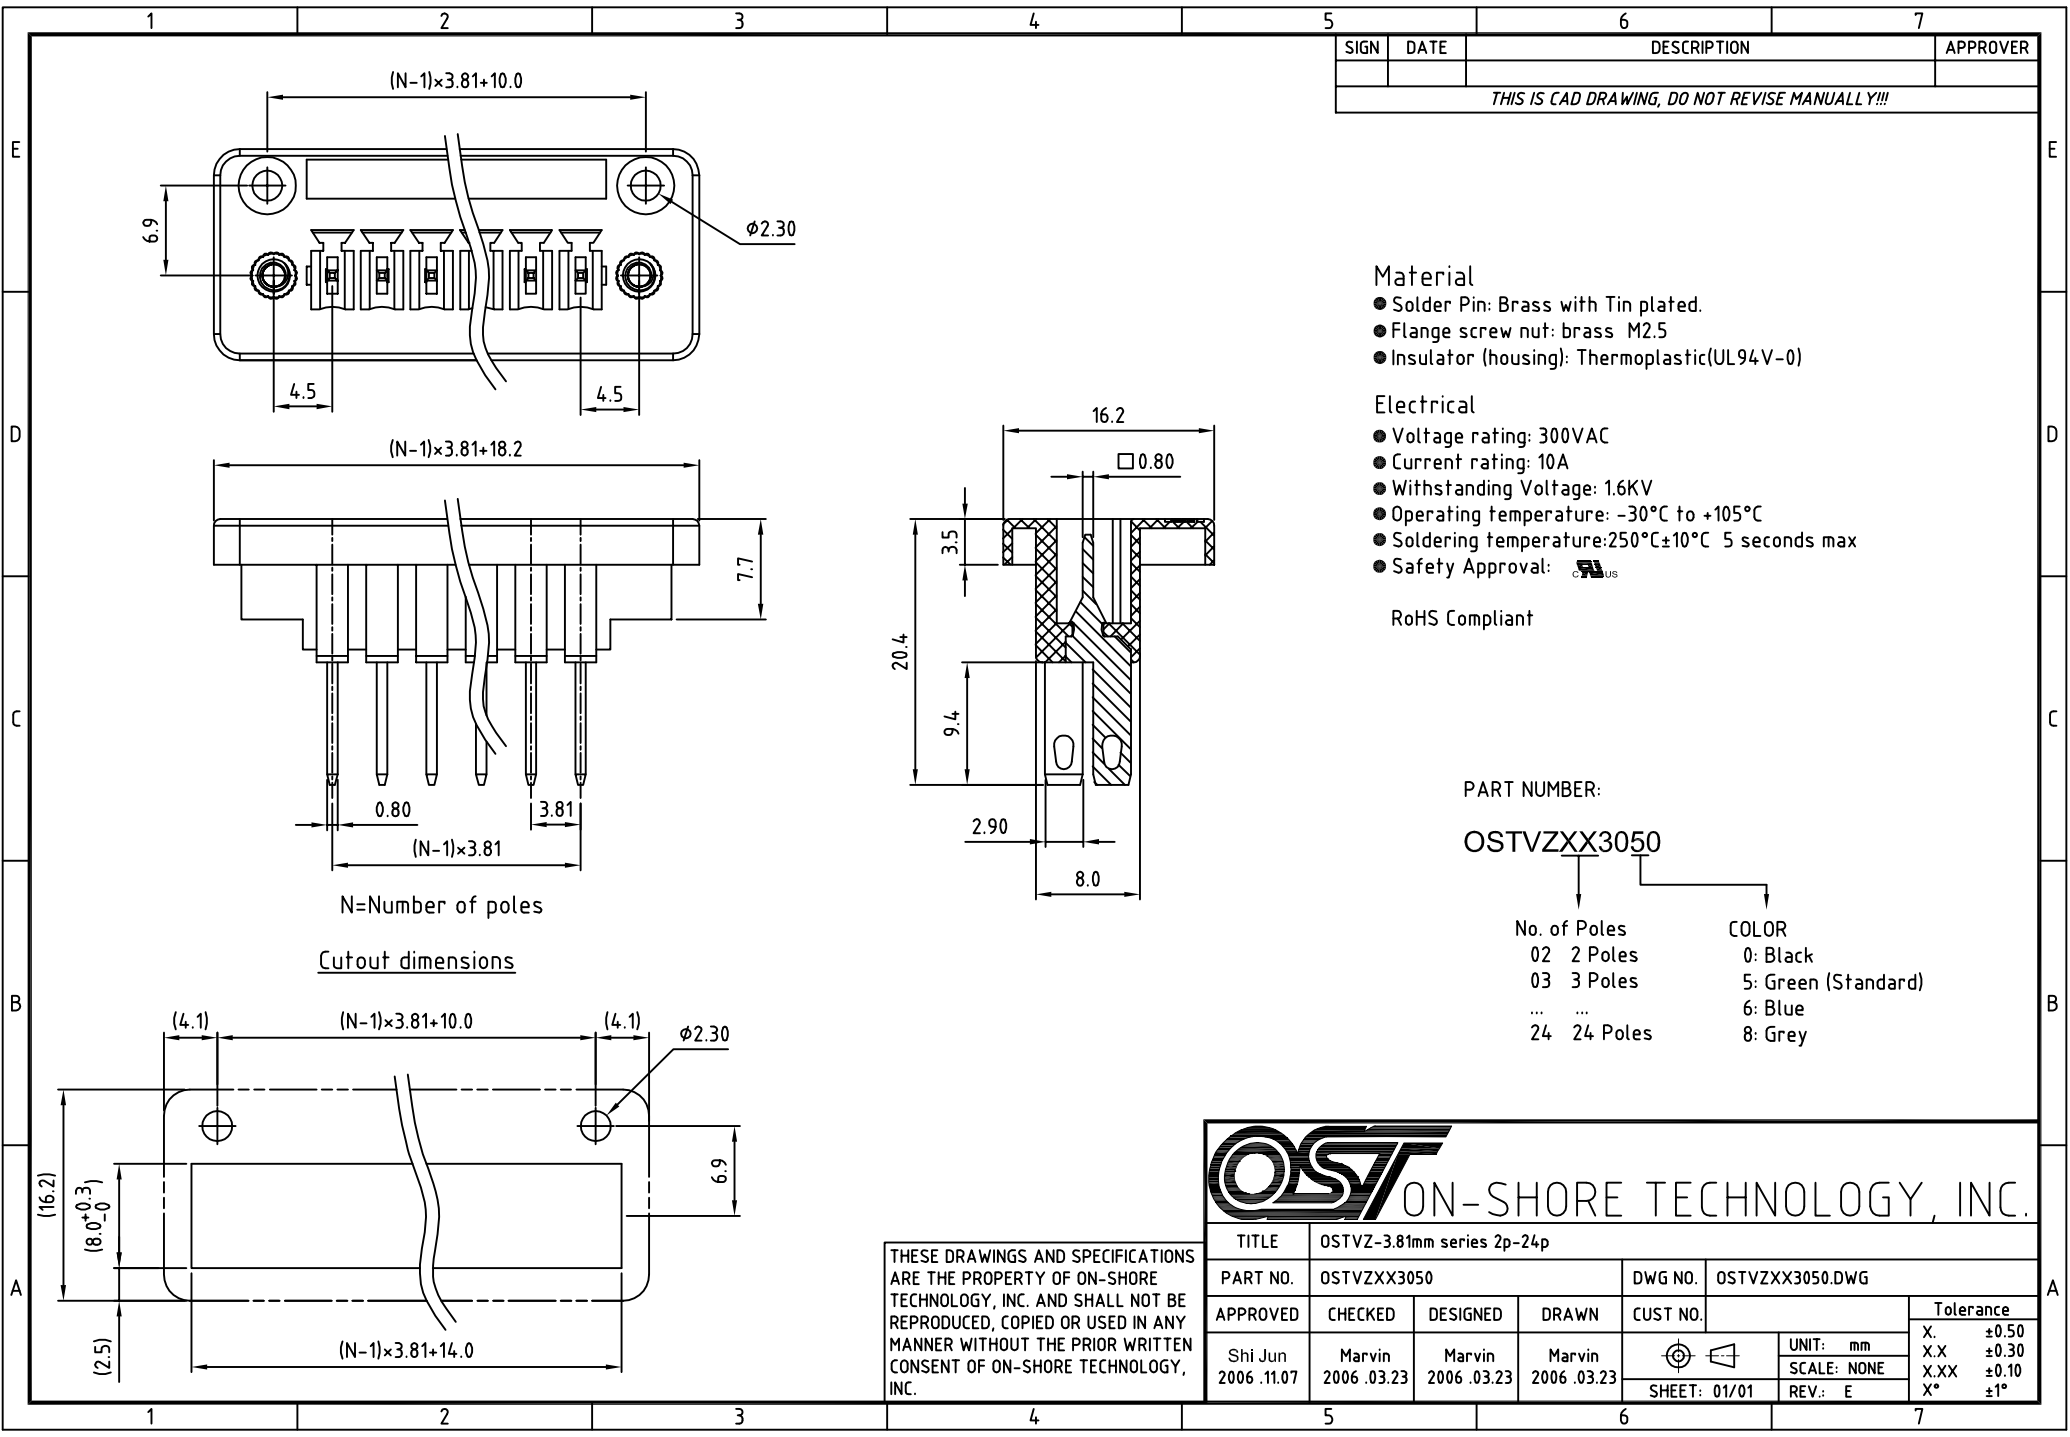

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material

- Solder Pin: Brass with Tin plated.
- Flange screw nut: brass M2.5
- Insulator (housing): Thermoplastic(UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C 5 seconds max
- Safety Approval: 

RoHS Compliant

PART NUMBER:

OSTVZXX3050

No. of Poles	COLOR
02 2 Poles	0: Black
03 3 Poles	5: Green (Standard)
... ..	6: Blue
24 24 Poles	8: Grey



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTVZ-3.81mm series 2p-24p				
PART NO.	OSTVZXX3050			DWG NO.	OSTVZXX3050.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
Shi Jun 2006 .11.07	Marvin 2006 .03.23	Marvin 2006 .03.23	Marvin 2006 .03.23		UNIT: mm SCALE: NONE	Tolerance X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
		SHEET: 01/01		REV.: E		