

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

SPECIFICATIONS




VOLTAGE & CURRENT:	DC 24 V, 30 A
WITHSTANDING VOLTAGE:	AC 2000 V/Min
INSULATION RESISTANCE:	1000 M Ω OR MORE AT DC 500 V
TEMPERATURE RANGE:	-40 °C ~+105 °C
SCREW TORQUE VALUE:	10 Kgf.cm
WIRE RANGE:	22 - 12 AWG
1) MOLDED PARTS:	Thermoplastic (UL 94 V-0)BLACK
2) TERMINAL:	BRASS, 1.5t, Tin PLATED
3) TERMINAL SCREWS:	STEEL, Ni PLATED, M5

APPROVAL: () Pending

RoHS Compliant

PART NUMBER:

OSTYK11E03030

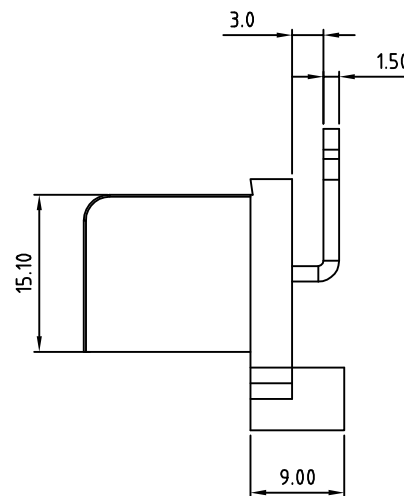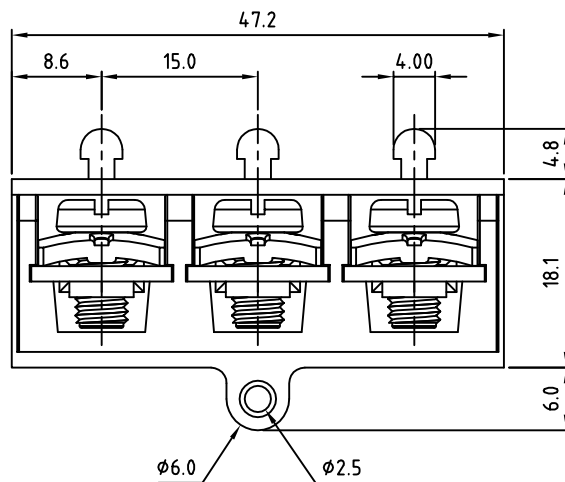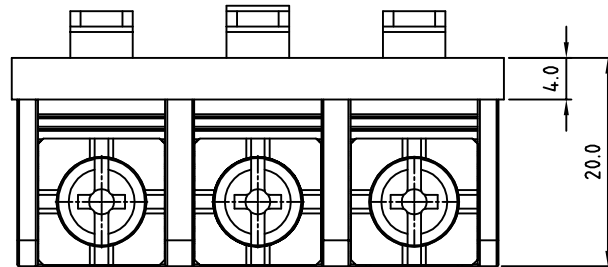

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

 ON-SHORE TECHNOLOGY, INC.							
TITLE	OSTYK-11E-3P						
PART NO.	OSTYK11E03030					DWG NO.	OSTYK11E03030.DWG
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
Shi Jun 2007.07.18	Seamus 2007.07.18	LUCY 2007.7.18	LUCY 2007.7.18				
					 UNIT: mm SCALE: NONE SHEET: 01/01 REV.: D		
					Tolerance X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°		