
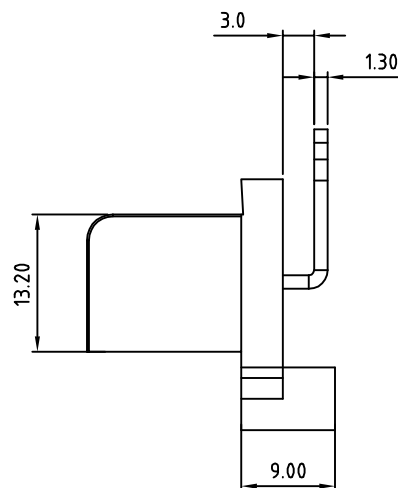
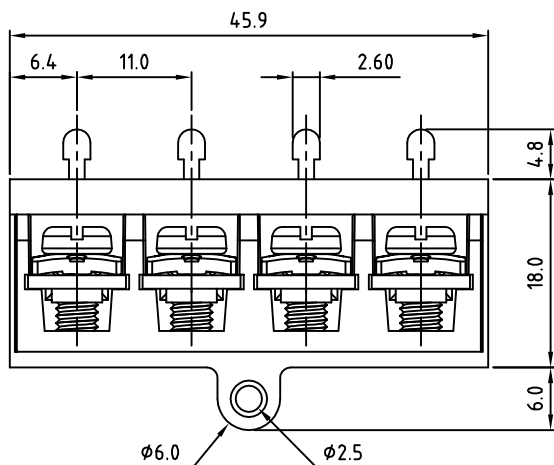


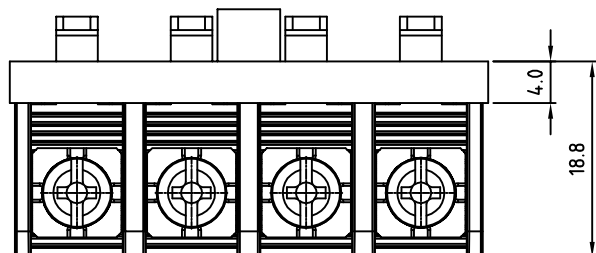

SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

SPECIFICATIONS

VOLTAGE & CURRENT:	DC 24 V, 30 A
WITHSTANDING VOLTAGE:	AC 2000 V/Min
INSULATION RESISTANCE:	1000 MΩ OR MORE AT DC 500 V
TEMPERATURE RANGE:	-40 °C ~ +105 °C
SCREW TORQUE VALUE:	10 Kgf.cm
WIRE RANGE:	22 - 12 AWG
1) MOLDED PARTS:	Thermoplastic (UL 94 V-0)
2) TERMINAL:	BRASS, 1.3t, Tin PLATED
3) TERMINAL SCREWS:	STEEL, Ni PLATED, M4
APPROVAL:	() Pending

RoHS Compliant

PART NUMBER:

OSTYK11E04030



ON-SHORE TECHNOLOGY, INC.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE	OSTYK-11E-4P						
PART NO.	OSTYK11E04030				DWG NO.	OSTYK11E04030.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
Shi Jun 2007.07.18	Seamus 2007.07.18	LUCY 2007.7.18	LUCY 2007.7.18		UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
					SHEET: 01/01		X.XX ±0.10
					REV: D		X° ±1°