


LINEAR INTEGRATED CIRCUIT

ADJUSTABLE VOLTAGE REGULATOR

DESCRIPTION

The UTC UC723 is a silicon monolithic integrated circuit, designed for service as voltage regulator at output voltages, ranging from 2V to 37V at current up to 150mA. It includes a temperature-compensated reference amplifier, an error amplifier, a power series pass transistor, and a current-limiting circuit.




DIP-14

FEATURES

- *Up to 150mA output current
- *Adjustable output voltage (from 2V to 37V)
- *Positive and negative voltage regulation
- *Regulation in excess of 10A with suitable pass transistors
- *Input and output short-circuit protection
- *Load and line regulation < 0.03%

BLOCK DIAGRAM

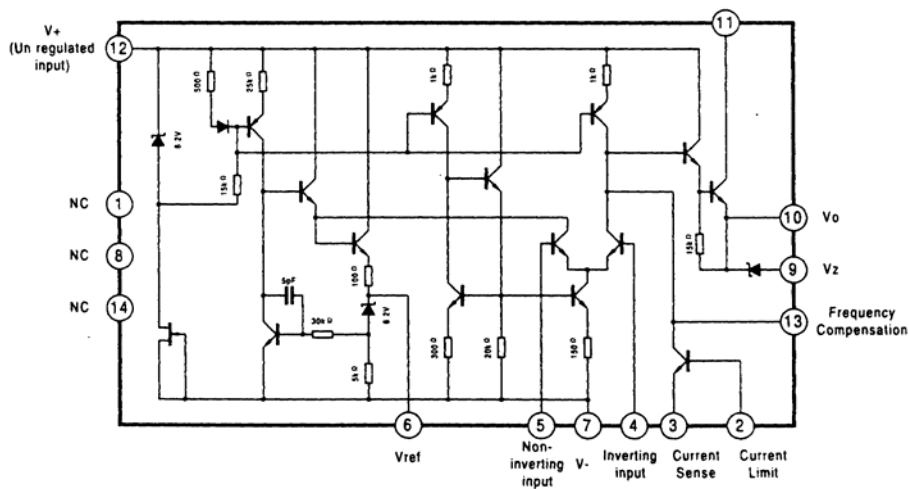

UTC UC723 LINEAR INTEGRATED CIRCUIT

ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage(between V+ and V-)	Vcc	40	V
Pulse Voltage for 50ms	Vpulse	50	V
Differential Input-Output Voltage	Vd	40	V
Different Input Voltage (Between inverting and non-inverting inputs)	Vid	+5	V
Different Input Voltage (Between Non-inverting Input and V-)	Vid	8	V
Current from Zener Diode Terminal	Iz	25	mA
Power Dissipation	Pd	900	mW
Operating Temperature	Topr	-55 ~ 125	°C
Storage Temperature	Tstr	-65 ~ 150	°C

ELECTRICAL CHARACTERISTICS(Ta=25°C, V+=Vc=Vi=12V, Vo=5V, IL=1mA, C1=100Pf, Cref=0, Rscp=0, unless otherwise specified, divider impedance R1*R2/(R1+R2) at non-inverting input, terminal 5=10KΩ)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Quiescent Regulator Current	ICQ	IL=0, VI=30V		2.3	3.5	mA
Input Voltage Range	VI		9.5		40	V
Output Voltage Range	VO		2		37	V
Differential Input-Output Voltage	VI-VO		3		38	V
Reference Voltage	VREF		6.95	7.15	7.35	V
Line Regulation (note 1)	ΔVO	VI=12V to 40V VI=12V to 15V VI=12V to 15V, Ta=-55~125°C		0.02 0.01	0.2 0.1	%Vo
Load Regulation (note 1)	ΔVO	IL=1mA TO 50mA IL=1mA TO 50mA, Ta=-55~125°C		0.03	0.15 0.6	%Vo
Output Voltage Temperature Coefficient	ΔVO	Ta=-55~125°C		0.002	0.015	%/°C
Ripple Rejection (note 2)	RR	f=50Hz to 10KHz f=50Hz to 10KHz, Cref=5μF Tmin<Ttyp<Tmax		74 86 2.5		dB
Short Circuit Limiting Current	ILIM	Rscp=10Ω, Vo=0		65		mA
Equivalent Noise RMS output Voltage (note 2)	VN	BW=100Hz to 10KHz, Cref=0 BW=100Hz to 10KHz, Cref=5μF		-20 2.5		μV

NOTE 1: Line and load regulation specifications are given for conditions of a constant chip temperature. For high dissipation condition, temperature drifts must be separately taken in account.

NOTE 2: For Cref, see Fig. 1


UTC UC723 LINEAR INTEGRATED CIRCUIT

APPLICATION CIRCUIT

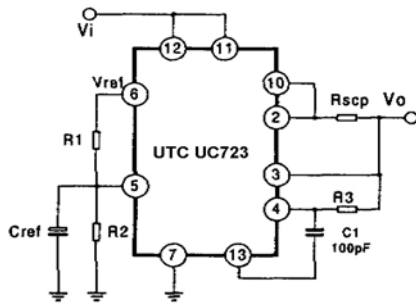


Regulator Output Voltage=5V
Line Regulation ($\Delta V_i=3V$)=0.5mV
Load regulation ($\Delta I_L=50mA$)=1.5mV
Note $R3=R1 \cdot R2 / (R1+R2)$ for Minimum temperature drift

Fig. 1 Low Voltage Regulator circuit($V_o=2V$ to $7V$)

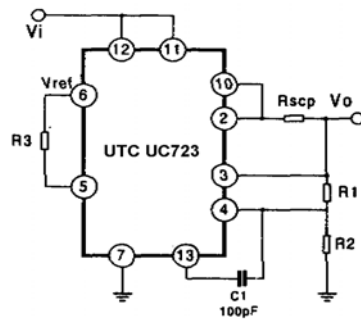


Regulator Output Voltage=5V
Line Regulation ($\Delta V_i=3V$)=1.5mV
Load regulation ($\Delta I_L=50mA$)=4.5mV
Note $R3=R1 \cdot R2 / (R1+R2)$ for Minimum temperature drift

Fig. 2 High Voltage Regulator circuit($V_o=7V$ to $37V$)

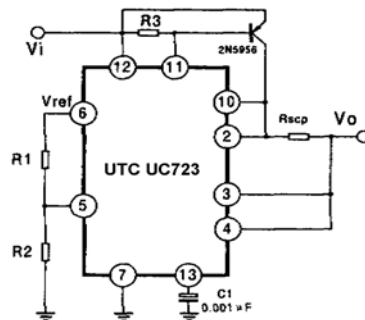

Regulator Output Voltage=5V
Line Regulation ($\Delta V_i=3V$)=0.5mV
Load regulation ($\Delta I_L=1A$)=5mV

Fig. 3 Positive Voltage regulator Circuit
(with external p-n-p pass transistor)




Regulator Output Voltage=15V
Line Regulation ($\Delta V_i=3V$)=1.5mV
Load regulation ($\Delta I_L=1A$)=15mV

Fig. 4 Positive Voltage regulator Circuit
(with external n-p-n pass transistor)

UTC UC723 LINEAR INTEGRATED CIRCUIT

TYPICAL PERFORMANCE CHARACTERISTICS

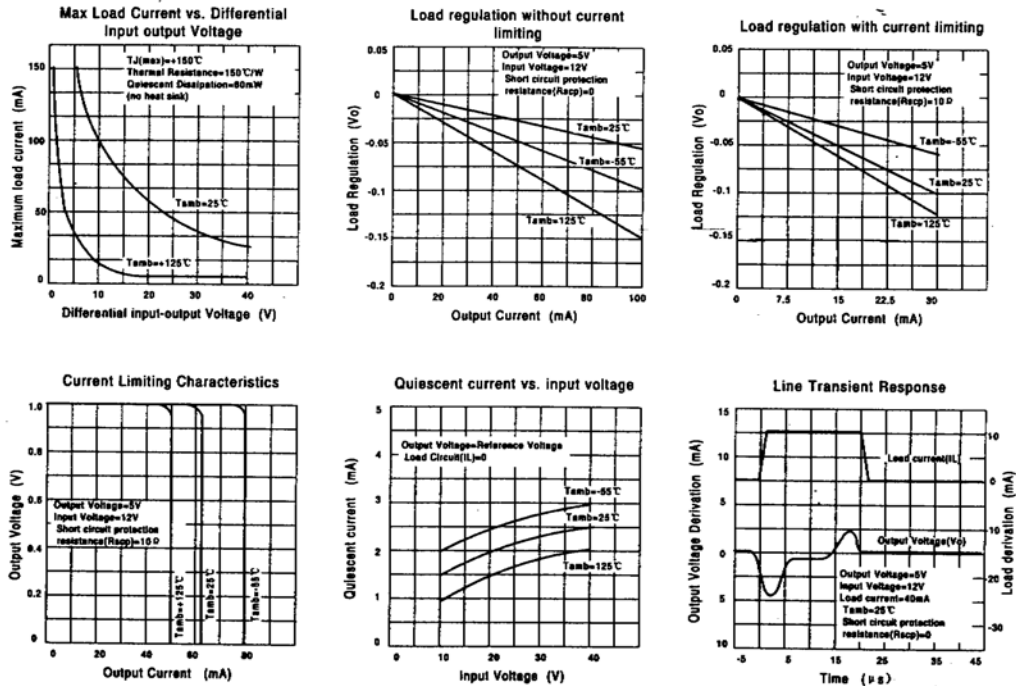

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.