



LR1122D

CMOS IC

LOW NOISE 200mA LDO REGULATOR

DESCRIPTION

The UTC **LR1122D** is a typical LDO (linear regulator) with the features of high output voltage accuracy, low supply current, low ON-resistance, and high ripple rejection.

During operation of the UTC **LR1122D**, the dropout voltage is very low and the response of line transient and load transient are very well.

Internally, there're many functions of UTC **LR1122D** which can be seen in the block figure. There are a voltage reference unit, an error amplifier, resistor-net for voltage setting, a current limit circuit, and a chip enable circuit in each UTC **LR1122D**.

The UTC **LR1122D** can be used as an ideal of the power supply for hand-held communication equipment, such as: power source for portable communication equipment, power source for electrical appliances, for example, cameras, VCRs and camcorders and power source for battery-powered equipment.

FEATURES


- * Ultra Supply Current: 20 μ A (Typ.)
- * Standby Mode: 0.1 μ A (Typ.)
- * Very Low Dropout Voltage: 0.13V (Typ.)
@I_{OUT}=150mA, V_{OUT}=2.85V
- * Ripple Rejection: 75dB (Typ.)
@f=1kHz, V_{OUT}=2.85V
- * Temperature-Drift Coefficient of Output Voltage: ± 30 ppm/ $^{\circ}$ C (Typ.)
- * Well Line Regulation: 0.02% / V (Typ.)
- * Output Voltage Accuracy: $\pm 0.8\%$ (Typ.)
- * Internal Fold Back Protection Circuit: 40mA (Typ.) @ short mode
- * C_{IN}=C_{OUT}=1 μ F or more (Ceramic capacitors) are recommended to be used with this IC

ORDERING INFORMATION



Ordering Number		Package	Pin Assignment					Packing
Lead Free	Halogen Free		1	2	3	4	5	
LR1122DL-xx-AF5-R	LR1122DG-xx-AF5-R	SOT-25	V _{IN}	G	CE	NC	O	Tape Reel
LR1122DL-xx-AB3-C-R	LR1122DG-xx-AB3-C-R	SOT-89	G	I	O	-	-	Tape Reel

Note: xx: Output Voltage, refer to Marking Information.



LR1122DL-xx-AF5-x-R	(1)Packing Type (2)Pin Assignment (3)Package Type (4)Output Voltage Code (5)Lead Free	(1) R: Tape Reel (2) refer to Pin Assignment (3) AF5: SOT-25, AB3: SOT-89 (4) xx: Refer to Marking Information (5) G: Halogen Free, L: Lead Free
---------------------	---	--

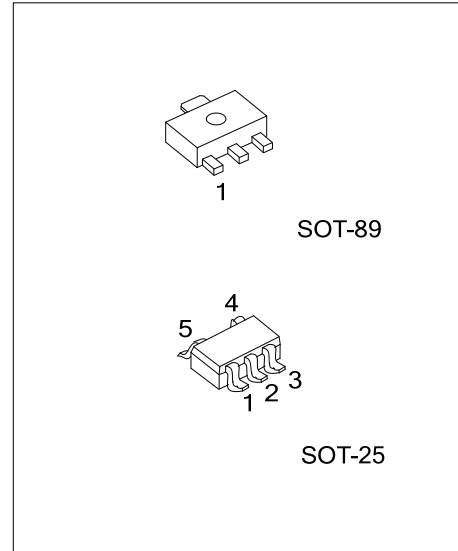

MARKING

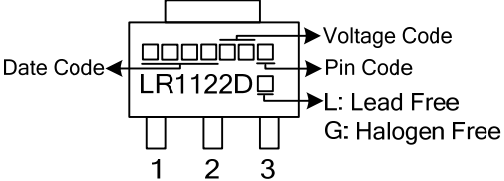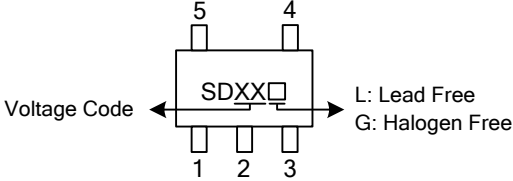PACKAGE	VOLTAGE CODE	MARKING
SOT-89	12: 1.2V 15: 1.5V 16: 1.6V 18: 1.8V 20: 2.0V	 LR1122D Date Code Voltage Code Pin Code L: Lead Free G: Halogen Free
SOT-25	25: 2.5V 2J: 2.85V 30: 3.0V 33: 3.3V 50: 5.0V	 SDXX Voltage Code L: Lead Free G: Halogen Free


PIN CONFIGURATION

SOT-89	SOT-25
 PIN CODE: C	

PIN DESCRIPTIONS

PIN NAME	DESCRIPTION
V_{IN}	Input Pin
GND	Ground Pin
CE	Chip Enable Pin. Active when this Pin is high.
NC	No Connection
V_{OUT}	Output Pin

■ BLOCK DIAGRAM

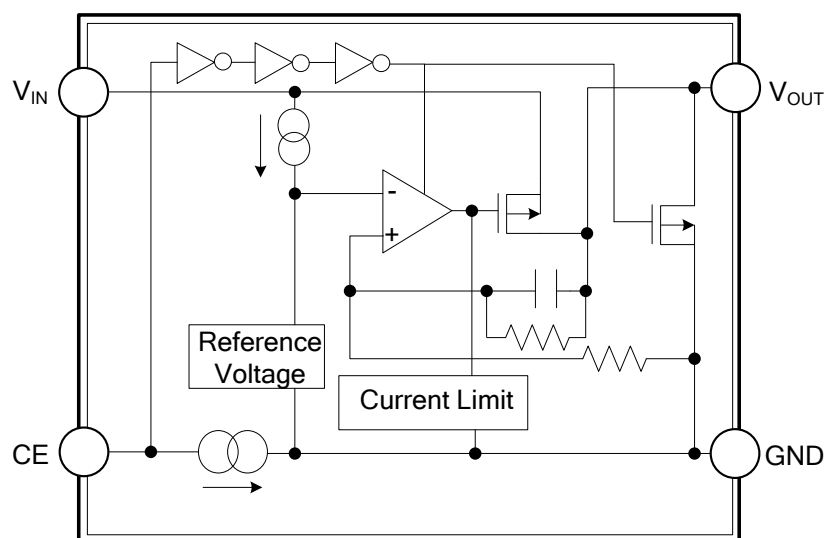

■ ABSOLUTE MAXIMUM RATING

PARAMETER		SYMBOL	RATINGS	UNIT
Input Voltage		V_{IN}	9	V
Input Voltage(CE Pin)		V_{CE}	8.5	V
Output Voltage		V_{OUT}	$-0.3 \sim V_{IN}+0.3$	V
Output Current		I_{OUT}	300	mA
Power Dissipation	SOT-25	P_D	420	mW
	SOT-89		550	
Junction Temperature		T_J	+125	°C
Operating Temperature		T_{OPR}	-40~+85	°C
Storage Temperature		T_{STG}	-55~+125	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.


Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS


($T_A=25^{\circ}\text{C}$, $V_{IN}=\text{Set } V_{OUT}+1\text{V}$, $I_{OUT}=1\text{mA}$, $C_I=C_O=1\mu\text{F}$, unless otherwise specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	$V_{IN} = \text{Set } V_{OUT}+1\text{V}$	$V_{OUT} > 2.0\text{V}$	$\times 0.992$		$\times 1.008$	V
			$V_{OUT} \leq 2.0\text{V}$	-16		+16	mV
Input Voltage		V_{IN}				7.5	V
Load Regulation		ΔV_{OUT}	$1\text{mA} \leq I_{OUT} \leq 150\text{mA}$		20	40	mV
Output Current		I_{OUT}		200			mA
Supply Current		I_{SS}	$I_{OUT}=0\text{A}$		20	40	μA
Supply Current (Standby)		I_{ST-BY}	$V_{CE}=0\text{V}$		0.1	2	μA
Short Current Limit		I_{LIMIT}	$V_{OUT}=0\text{V}$		40		mA
CE Pull-down Current		I_{PD}			0.3		μA
CE Input Voltage	High	V_{CEH}		1.5			V
	Low	V_{CEL}				0.3	V
Output Noise		eN	$B_W=10\text{Hz to } 100\text{kHz}$, $I_{OUT}=30\text{mA}$		30		μVrms
Ripple Rejection		RR	$f=1\text{kHz}$, Ripple $0.2V_{P-P}$ $V_{IN}=\text{Set } V_{OUT}+1\text{V}$, $I_{OUT}=30\text{mA}$ (In case that $V_{OUT}=2.0\text{V}$, $V_{IN}=3\text{V}$)		75		dB
Dropout Voltage	V_D	$I_{OUT}=150\text{mA}$	$1.2\text{V} \leq V_{OUT} < 1.5\text{V}$		0.40	0.50	V
			$1.5\text{V} \leq V_{OUT} < 1.7\text{V}$		0.24	0.38	
			$1.7\text{V} \leq V_{OUT} < 2.0\text{V}$		0.21	0.34	
			$2.0\text{V} \leq V_{OUT} < 2.5\text{V}$		0.17	0.30	
			$2.5\text{V} \leq V_{OUT} < 2.8\text{V}$		0.14	0.25	
			$2.8\text{V} \leq V_{OUT} \leq 5.0\text{V}$		0.13	0.23	
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	$1.2\text{V} \leq V_{OUT} \leq 4.0\text{V}$, $V_{SET}+0.5\text{V} \leq V_{IN} \leq 5\text{V}$			0.02	0.10	%V
		$4.0\text{V} < V_{OUT} \leq 5.0\text{V}$, $V_{SET}+0.5\text{V} \leq V_{IN} \leq 6.5\text{V}$					
Output Voltage Temperature Coefficient		$\frac{\Delta V_{OUT}}{\Delta T}$	$-40^{\circ}\text{C} \leq T_{OPR} \leq 85^{\circ}\text{C}$		± 30		ppm/°C
Low Output Nch Tr. ON Resistance		R_{LOW}	$V_{IN}=4.0$, $V_{CE}=0\text{V}$		70		Ω


■ TEST CIRCUIT

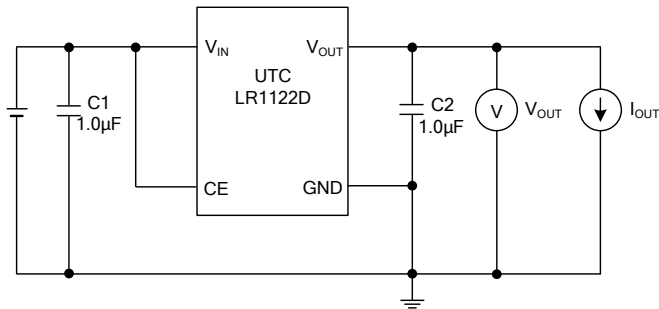


Basic Test Circuit

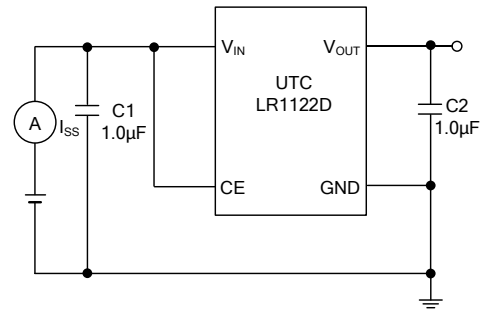

Test Circuit for Supply Current

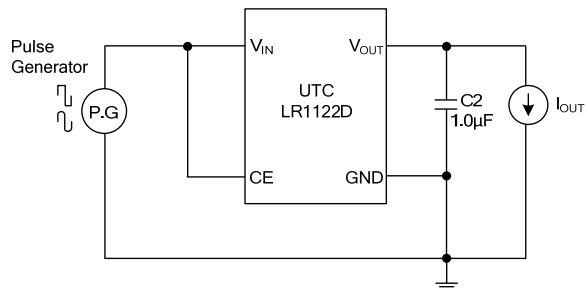


Test Circuit for Ripple Rejection






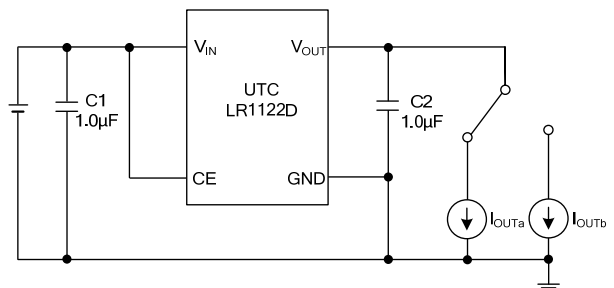


Test Circuit for Load Transient Response







■ TYPICAL APPLICATION CIRCUIT

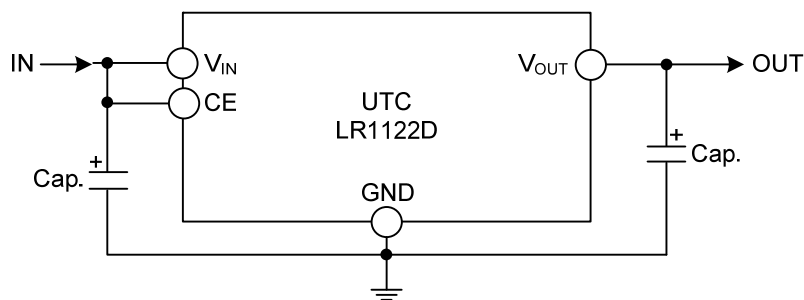

TYPICAL CHARACTERISTICS

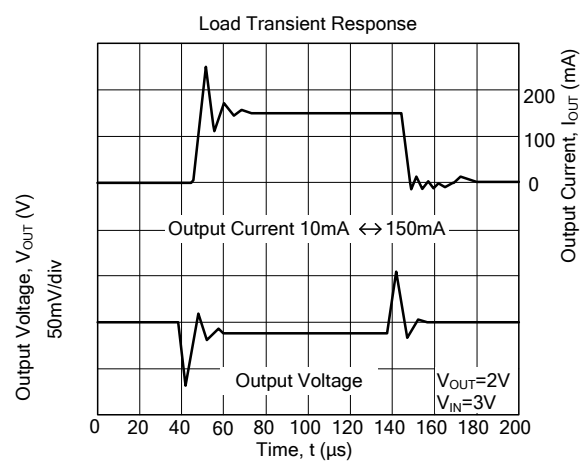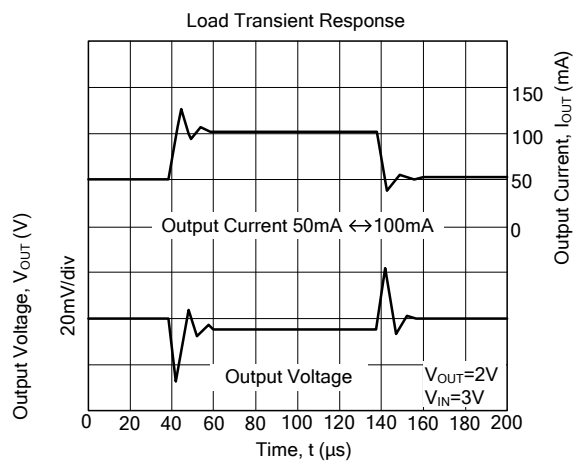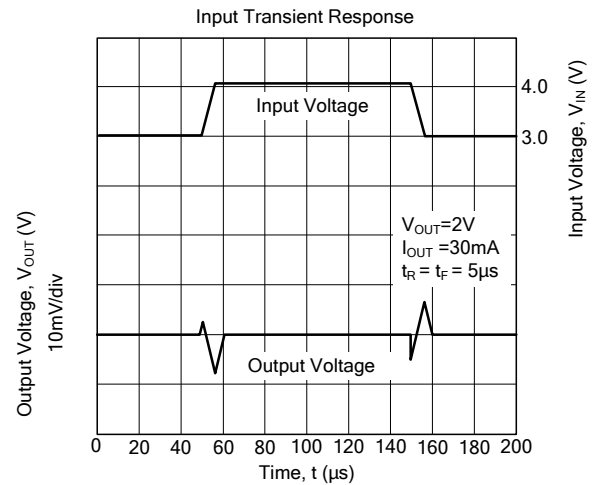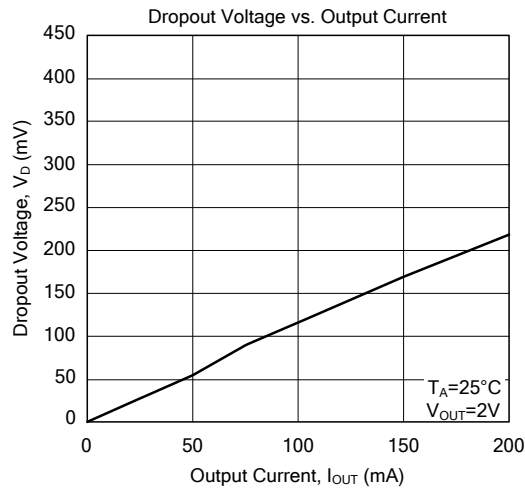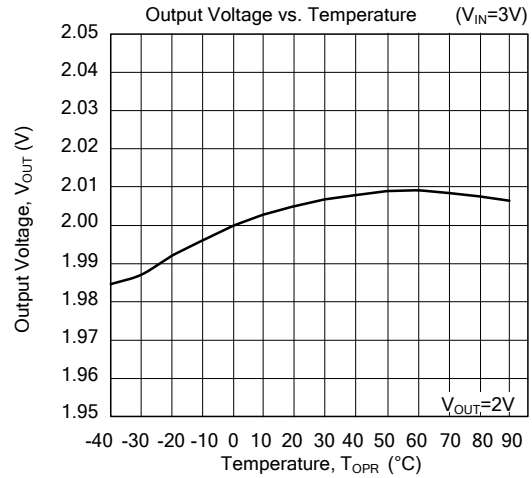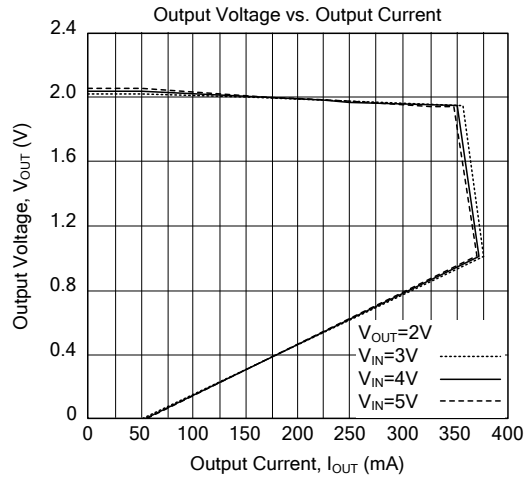

■ TYPICAL CHARACTERISTICS(Cont.)

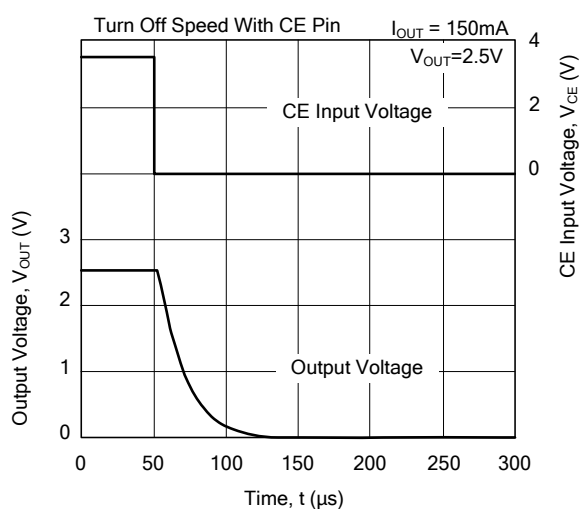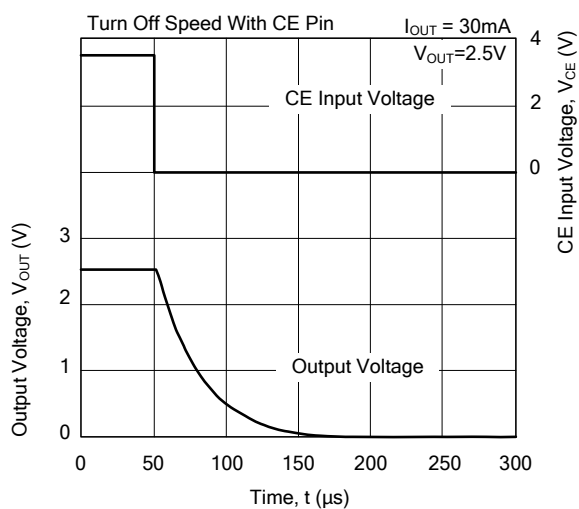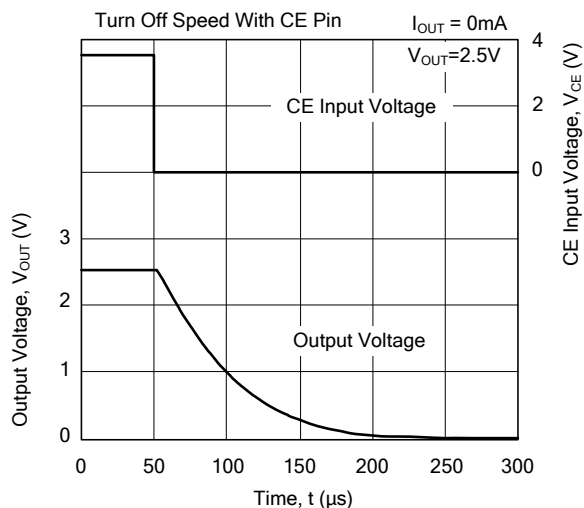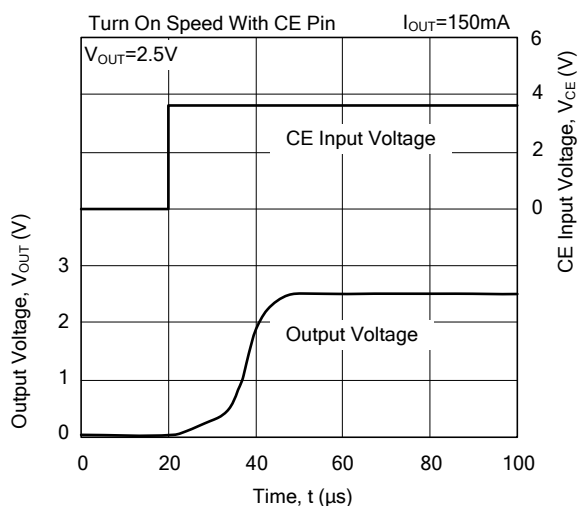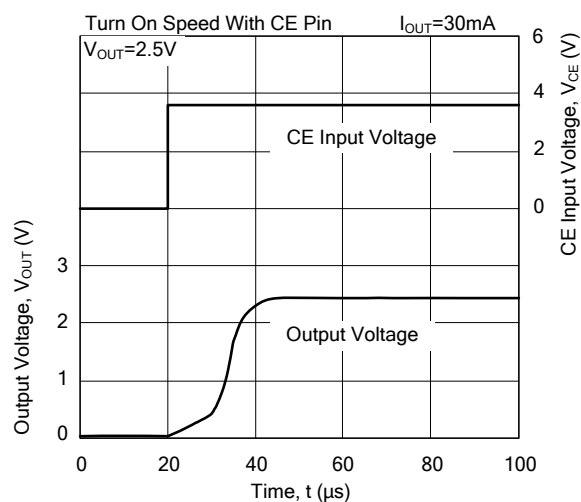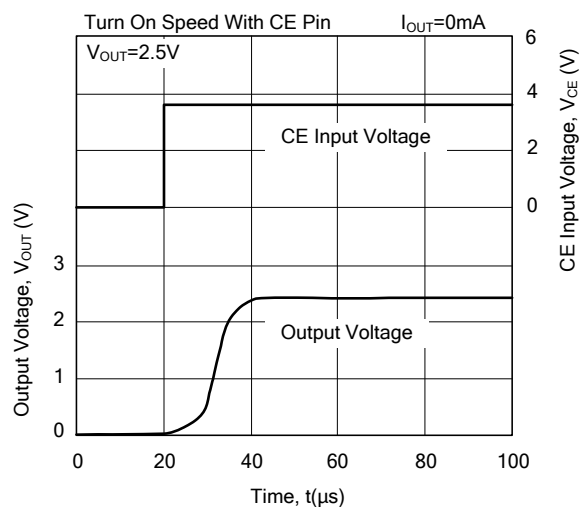

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.