



P4596

Preliminary


LINEAR INTEGRATED CIRCUIT

PWM CONTROL 3A STEP-DOWN CONVERTER

DESCRIPTION

The UTC P4596 consists of 3A step-down switching regulator with PWM control which includes a reference voltage source, oscillation circuit, error amplifier, internal PMOS and etc.

The UTC P4596 can provide low-ripple power, high efficiency, and excellent transient characteristics and an enable function, an over current protect function and a short circuit protect function are built inside, And the PWM control circuit can vary the duty ratio linearly from 100 down to 0%. This converter also includes an error amplifier circuit as well as a soft-start circuit that prevents overshoot at startup. These ICs can work as step-down switching regulators with the addition of an internal P-channel Power MOS, a coil and a diode connected externally. They provide such outstanding features: low current consumption. It is also suitable for the operation via an AC adapter because this converter can accommodate an input voltage up to 40V.

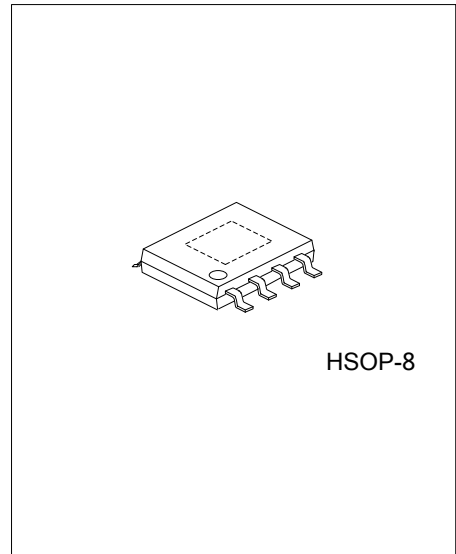

FEATURES

- \* Input voltage : 8V~40V
\* Duty ratio : 0%~100% PWM control
\* Enable with Soft-Start function
\* Oscillation frequency can be set by outside resistance
\* Current Limit, SCP and OTP


ORDERING INFORMATION

Table with 4 columns: Ordering Number (Lead Free, Halogen Free), Package (HSOP-8), Packing (Tape Reel)

Note: xx: Output Voltage, refer to Marking Information.

Table explaining the marking information for P4596L-xx-SH2-R, including Packing Type, Package Type, Output Voltage Code, and Halogen Free status.


■ PIN CONFIGURATION

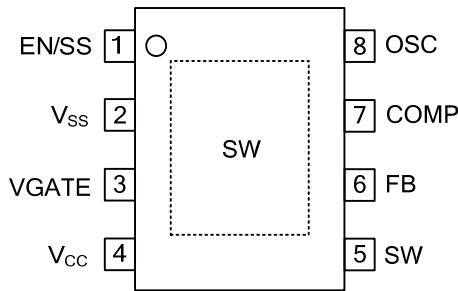

■ PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	EN/SS	Enable and Soft-start pin
2	V <sub>SS</sub>	Ground
3	VGATE	Driver GATE clamping pin.
4	V <sub>CC</sub>	IC power supply pin
5	SW	Switch pin.
6	FB	Feedback voltage
7	COMP	Compensation pin
8	OSC	Frequency Set Pin.

■ BLOCK DIAGRAM

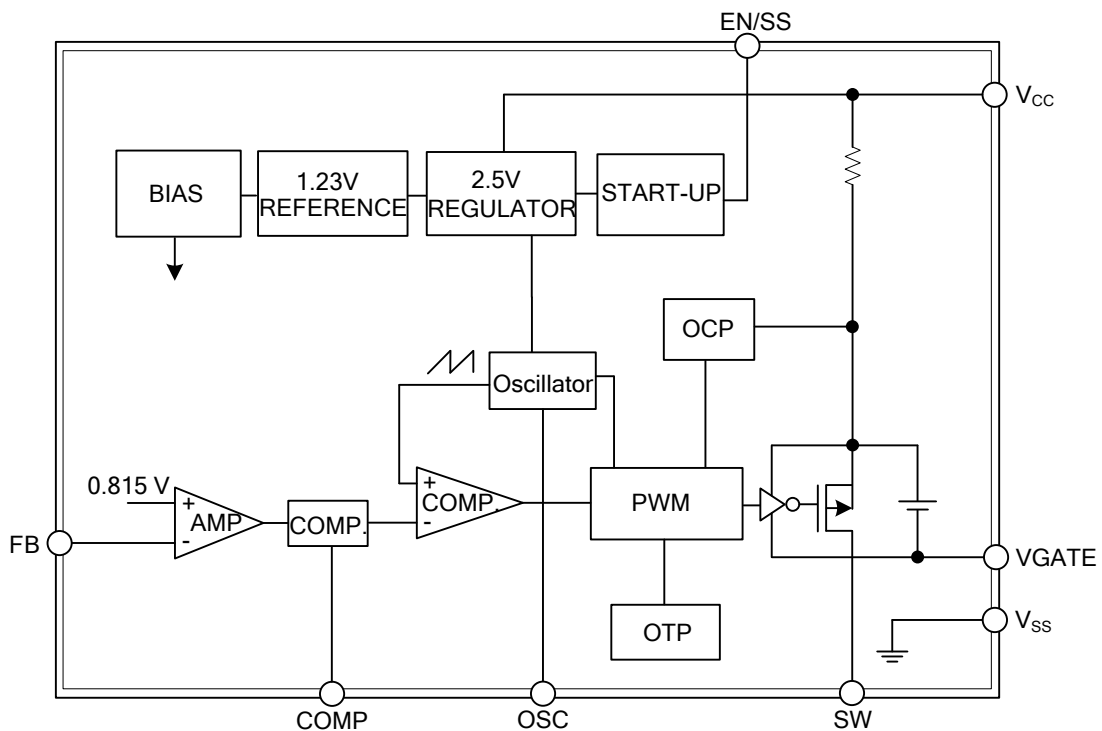

### ■ ABSOLUTE MAXIMUM RATING (T<sub>A</sub>=25°C)


PARAMETER	SYMBOL	RATINGS	UNIT
VCC Pin Voltage	V <sub>CC</sub>	V <sub>SS</sub> -0.3~V <sub>SS</sub> +45	V
Feedback Pin Voltage	V <sub>FB</sub>	V <sub>SS</sub> -0.3~6	V
EN/SS Pin Voltage	V <sub>EN/SS</sub>	V <sub>SS</sub> -0.3~6	V
OSC Pin Voltage	V <sub>OSC</sub>	V <sub>SS</sub> -0.3~3	V
COMP Pin Voltage	V <sub>COMP</sub>	V <sub>SS</sub> -0.3~6	V
VGATE Pin Voltage	V <sub>GATE</sub>	V <sub>SS</sub> -0.3~V <sub>CC</sub>	V
Switch Pin Voltage	V <sub>SW</sub>	V <sub>SS</sub> -0.3~V <sub>CC</sub> +0.3	V
Power Dissipation	P <sub>D</sub>	Internally limited	mW
Operating Supply Voltage	V <sub>OP</sub>	8~40	V
Junction Temperature	T <sub>J</sub>	-40~+125	°C
Storage Temperature	T <sub>STG</sub>	-65~+150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

### ■ ELECTRICAL CHARACTERISTICS (V<sub>CC</sub>=12V, T<sub>A</sub>=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Feedback Voltage	V <sub>FB</sub>	V <sub>CC</sub> =10V~30V, I <sub>OUT</sub> =0~2A T <sub>J</sub> =-20°C~125°C	0.800	0.815	0.830	V
Quiescent Current	I <sub>CCQ</sub>	V <sub>FB</sub> =1V		3	6	mA
Feedback Bias Current	I <sub>FB</sub>	I <sub>OUT</sub> =0.1A		0.1		μA
Shutdown Supply Current	I <sub>SD</sub>	V <sub>EN/SS</sub> =0V	10	56	300	μA
Current Limit	I <sub>CL</sub>		3.5			A
Adjustable Frequency Range	F <sub>OSC</sub>		50		380	KHz
Short Frequency	F <sub>OSC1</sub>	V <sub>CC</sub> =10V~30V	45	50	55	KHz
EN/SS Pin Shutdown Logic Input Threshold Voltage	V <sub>ENL</sub>				0.8	V
EN/SS Pull High Current	I <sub>EN/SS</sub>	V <sub>EN/SS</sub> =0V		8		μA
Internal MOSFET R <sub>DS(on)</sub>	R <sub>DS(on)</sub>	V <sub>CC</sub> =12V, V <sub>FB</sub> =0V		80	180	mΩ

■ TYPICAL APPLICATION CIRCUIT

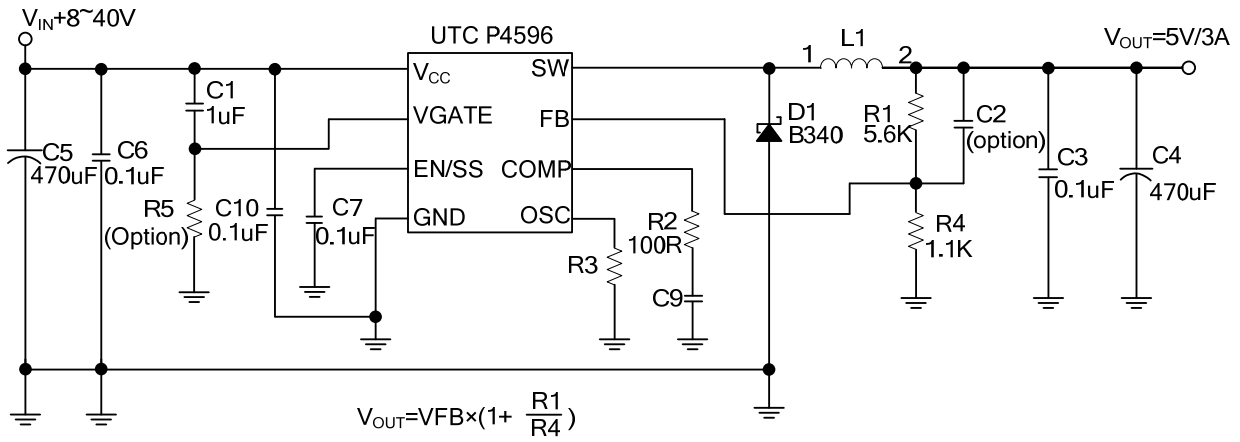

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.