



UTT120P06

Preliminary

Power MOSFET

**120A, 60V P-CHANNEL
POWER MOSFET**

■ DESCRIPTION

The UTC **UTT120P06** is a P-channel power MOSFET using UTC's advanced technology to provide the customers with high switching speed and a minimum on-state resistance. It can also withstand high energy in the avalanche.



The UTC **UTT120P06** is suitable for low voltage and high speed switching applications

■ FEATURES

* $R_{DS(ON)} \leq 6.9m\Omega$ @ $V_{GS} = -10V$, $I_D = -30A$

* High Switching Speed

■ SYMBOL

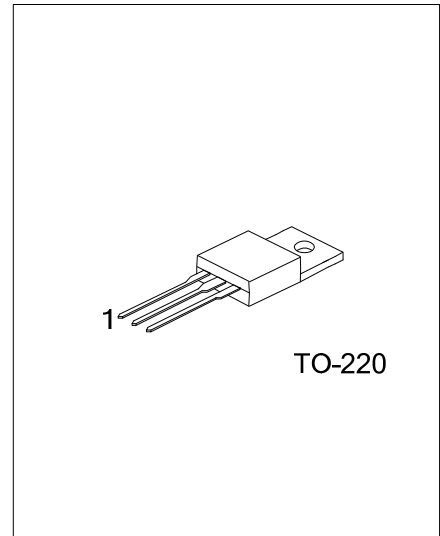

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UTT120P06L-TA3-T	UTT120P06G-TA3-T	TO-220	G	D	S	Tube

Note: Pin Assignment: G: Gate D: Drain S: Source

UTT120P06L-TA3-T		(1) Packing Type	(1) T: Tube
		(2) Package Type	(2) TA3: TO-220
		(3) Lead Free	(3) G: Halogen Free, L: Lead Free

■ **ABSOLUTE MAXIMUM RATINGS** ($T_C=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER			SYMBOL	RATINGS	UNIT
Drain-Source Voltage			V_{DSS}	-60	V
Gate-Source Voltage			V_{GSS}	± 20	V
Drain Current	Continuous	$T_C=25^{\circ}\text{C}$	I_D	-120	A
		$T_C=125^{\circ}\text{C}$		-95	A
	Pulsed		I_{DM}	-480	A
Single Pulsed Avalanche Energy		$L=0.1\text{mH}$	E_{AS}	281 (Note 2)	mJ
Power Dissipation		$T_C=25^{\circ}\text{C}$	P_D	192	W
Junction Temperature			T_J	+150	$^{\circ}\text{C}$
Storage Temperature			T_{STG}	-55~+150	$^{\circ}\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Duty cycle $\leq 1\%$

■ **THERMAL DATA**

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient		θ_{JA}	62	$^{\circ}\text{C/W}$
Junction to Case		θ_{JC}	0.65	$^{\circ}\text{C/W}$

■ **ELECTRICAL CHARACTERISTICS** ($T_J=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV _{DSS}	I _D =-250μA, V _{GS} =0V	-60			V
Drain-Source Leakage Current		I _{DSS}	V _{DS} =-60V, V _{GS} =0V			-1	μA
			V _{DS} =-60V, V _{GS} =0V, T _C =125°C			-50	μA
Gate-Source Leakage Current	Forward	I _{GSS}	V _{GS} =+20V, V _{DS} =0V			+100	nA
	Reverse		V _{GS} =-20V, V _{DS} =0V			-100	nA
ON CHARACTERISTICS							
Gate Threshold Voltage		V _{GS(TH)}	V _{DS} =V _{GS} , I _D =-250μA	-1		-3	V
Static Drain-Source On-State Resistance		R _{DS(ON)}	V _{GS} =-10V, I _D =-30A		5.5	6.9	mΩ
			V _{GS} =-4.5V, I _D =-30A		7.0	8.8	mΩ
DYNAMIC PARAMETERS							
Input Capacitance		C _{ISS}	V _{GS} =0V, V _{DS} =-25V, f=1.0MHz		11400		pF
Output Capacitance		C _{OSS}			1200		pF
Reverse Transfer Capacitance		C _{RSS}			900		pF
SWITCHING PARAMETERS							
Total Gate Charge		Q _G	V _{DS} =-30V, V _{GS} =-10V, I _D =-110A		230	345	nC
Gate to Source Charge		Q _{GS}			50		nC
Gate to Drain Charge		Q _{GD}			60		nC
Turn-ON Delay Time		t _{D(ON)}	V _{DD} =-30V, V _{GS} =-10V, I _D =-110A, R _G =2.5Ω, R _L =0.27Ω		20		ns
Rise Time		t _R			160	240	ns
Turn-OFF Delay Time		t _{D(OFF)}			200		ns
Fall-Time		t _F			240	360	ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Maximum Body-Diode Continuous Current		I _S				-120	A
Maximum Body-Diode Pulsed Current		I _{SM}				-480	A
Drain-Source Diode Forward Voltage		V _{SD}	I _S =-120A, V _{GS} =0V		-1.0	-1.5	V
Body Diode Reverse Recovery Time		t _{rr}	I _F =-85A, dI _F /dt=100A/μs		65	100	ns
Body Diode Reverse Recovery Charge		Q _{RR}			0.14	0.32	nC

Notes: 1. Pulse test, pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.