



MBR10150C

Preliminary

DIODE

HIGH VOLTAGE POWER SCHOTTKY RECTIFIER


DESCRIPTION

The UTC **MBR10150C** is a high voltage dual schottky rectifier, providing the designers with high current capacity and guard-ring for stress protection.

The UTC **MBR10150C** is suitable for medium voltage operation and high frequency circuits where low switching losses and low noise are required

FEATURES

- * High surge capacity
- * Low Forward Voltage
- * Guard-ring for stress protection
- * Pb-Free

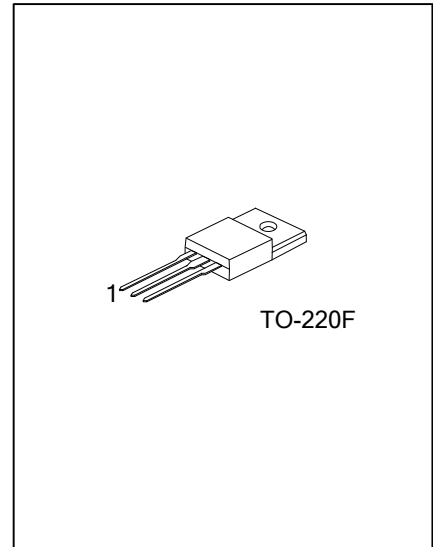

ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
MBR10150CL-TF3-T	MBR10150CG-TF3-T	TO-220F	Tube

<p>MBR10150CL-TF3-T</p> <p>(1)Packing Type (2)Package Type (3)Lead Free</p>	<p>(1) T: Tube (2) TF3: TO-220F (3) G:Halogen Free, L: Lead Free</p>
---	--

■ **ABSOLUTE MAXIMUM RATINGS** (Per Diode Leg)

PARAMETER	SYMBOL	RATINGS	UNIT
DC Blocking Voltage	V_R	150	V
Peak Repetitive Reverse Voltage	V_{RRM}		
Working Peak Reverse Voltage	V_{RWM}		
Average Rectified Forward Current (Rated V_R) $T_C=142^{\circ}C$	$I_{F(AV)}$	5	A
Peak Repetitive Forward Current (Rated V_R , Square Wave, 20 kHz) $T_C=142^{\circ}C$	I_{FRM}	10	A
Non-Repetitive Peak Surge Current (Surge Applied At Rated Load Conditions Half Wave, Single Phase, 60Hz)	I_{FSM}	100	A
Voltage Rate of Change (Rated V_R)	dv/dt	10000	V/ μ s
Operating Junction Temperature (Note 2)	T_J	150	$^{\circ}C$
Storage Temperature	T_{STG}	-55 ~ 150	$^{\circ}C$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
 2. The heat generated must be less than the thermal conductivity from Junction-to-Ambient: $dP_D/dT_J < 1/\theta_{JA}$.

■ **THERMAL DATA**

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	60	$^{\circ}C/W$
Junction to Case	θ_{JC}	4.5	

■ **ELECTRICAL CHARACTERISTICS**

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Instantaneous Forward Voltage Drop (Note 1)	V_F	$I_F=5A, T_C=25^{\circ}C$			0.92	V
		$I_F=5A, T_C=125^{\circ}C$			0.82	
Instantaneous Reverse Current (Note 1)	I_R	Rated DC Voltage, $T_C=25^{\circ}C$			0.1	mA
		Rated DC Voltage, $T_C=125^{\circ}C$			15.0	

Note: 1. Pulse Test: Pulse Width=300 μ s, Duty Cycle \leq 2.0%.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.