



U74AHC164

CMOS IC


8-Bit Serial-In/Parallel-Out Shift Register

DESCRIPTION

The **U74AHC164** is an 8-bit serial-in/parallel-out shift register. The logical AND of the Dsa and Dsb enters into Q0 and shifts one place to right on each LOW-to-HIGH transition of the clock (CP). A low level on the master reset($\overline{MR}$) input clears all the register asynchronously and force all output LOW.

FEATURES

- * Operate From 2V to 5.5V
- * Schmitt on all inputs
- * Balanced propagation delays

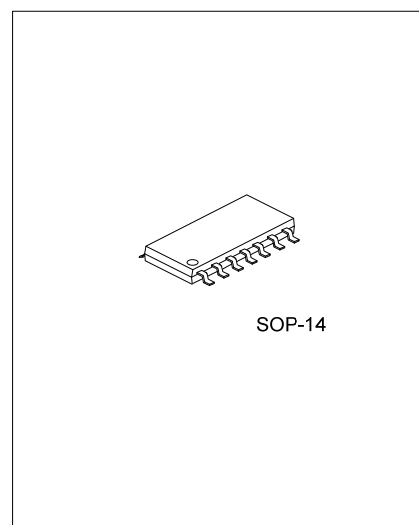


Lead-free: U74AHC164L
Halogen-free: U74AHC164G

ORDERING INFORMATION


Ordering Number			Package	Packing
Normal	Lead Free	Halogen Free		
U74AHC164-S14-R	U74AHC164L-S14-R	U74AHC164G-S14-R	SOP-14	Tape Reel
U74AHC164-S14-T	U74AHC164L-S14-T	U74AHC164G-S14-T	SOP-14	Tube

U74AHC164L-S14-R	(1)Packing Type (2)Package Type (3)Lead Plating	(1) R: Tape Reel, T: Tube (2) S14: SOP-14 (3) G: Halogen Free, L: Lead Free, Blank: Pb/Sn
------------------	---	--

PIN CONFIGURATION

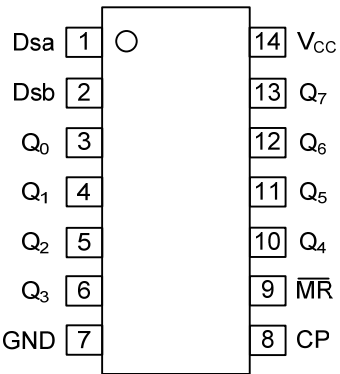

FUNCTIONAL DIAGRAM

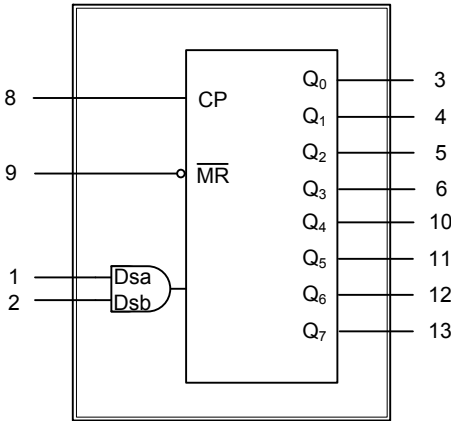


FUNCTION TABLE

INPUTS(MR)	INPUTS(CP)	INPUTS(Dsa)	INPUTS(Dsb)	OUTPUTS(Q ₀)	OUTPUTS(Q ₁ ~Q ₇)
L	×	×	×	L	L~L
H	↑	L	L	L	Q ₀ ~Q ₆
H	↑	L	H	L	Q ₀ ~Q ₆
H	↑	H	L	L	Q ₀ ~Q ₆
H	↑	H	H	H	Q ₀ ~Q ₆

Note: H: HIGH voltage level; L: LOW voltage level; ↑ : LOW-to-HIGH transition; ×: don't care.

■ LOGIC DIAGRAM (POSITIVE LOGIC)

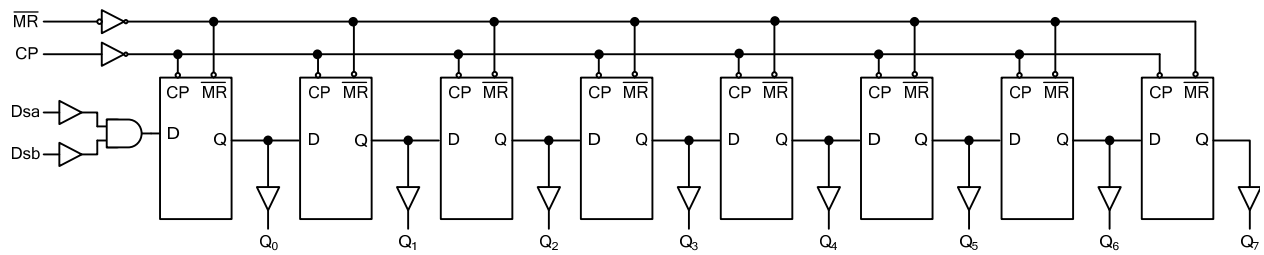

■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	-0.5~7	V
Input Voltage	V_{IN}	-0.5~ 7	V
Input Clamp Current	I_{IK}	-20	mA
Output Clamp Current	I_{OK}	±20	mA
Output Current	I_{OUT}	±25	mA
Vcc or GND Current	I_{CC}	±75	mA
Power Dissipation	P_D	500	mW
Storage Temperature	T_{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}		2	5	5.5	V
Input Voltage	V_{IN}		0		5.5	V
Output Voltage	V_{OUT}		0		V_{CC}	V
Input Transition Rise or Fall Rate	t_R, t_F	$V_{CC}=3.3\pm0.3V$			100	ns/V
		$V_{CC}=5.0\pm0.5V$			20	
Operating Temperature	T_A		-40		85	°C

■ STATIC CHARACTERISTICS ($T_A=25^{\circ}C$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-Level Input Voltage	V_{IH}	$V_{CC}=2.0V$	1.5			V
		$V_{CC}=3.0V$	2.1			
		$V_{CC}=5.5V$	3.85			
Low-Level Input Voltage	V_{IL}	$V_{CC}=2.0V$			0.5	V
		$V_{CC}=3.0V$			0.9	
		$V_{CC}=5.5V$			1.65	
High-Level Output Voltage	V_{OH}	$V_{CC}=2.0V, I_{OH}=-50\mu A$	1.9	2.0		V
		$V_{CC}=3.0V, I_{OH}=-50\mu A$	2.9	3.0		
		$V_{CC}=4.5V, I_{OH}=-50\mu A$	4.4	4.5		
		$V_{CC}=3.0V, I_{OH}=-4mA$	2.58			
		$V_{CC}=4.5V, I_{OH}=-8mA$	3.94			
Low-Level Output Voltage	V_{OL}	$V_{CC}=2.0V, I_{OL}=50\mu A$		0	0.1	V
		$V_{CC}=3.0V, I_{OL}=50\mu A$		0	0.1	
		$V_{CC}=4.5V, I_{OL}=50\mu A$		0	0.1	
		$V_{CC}=3.0V, I_{OL}=4mA$			0.36	
		$V_{CC}=4.5V, I_{OL}=8mA$			0.36	
Input Leakage Current	$I_{I(LEAK)}$	$V_{CC}=5.5V, V_{IN}=5.5V$ or GND			0.1	μA
Output OFF-State Current	I_{OZ}	$V_{CC}=5.5V, V_{IN}=5.5V$ or GND			±0.25	uA
Quiescent Supply Current	I_Q	$V_{CC}=5.5V, V_{IN}=5.5V$ or GND, $I_{OUT}=0$			4	uA
Input Capacitance	C_i	$V_{IN}=V_{CC}$ or GND		3	10	pF



■ DYNAMIC CHARACTERISTICS (typical values at V_{CC}=3V or V_{CC}=5V)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation Delay from Input (CP) to Output(Qn)	t _{PHL} /t _{PLH}	V _{CC} =3.0V to 3.6V, C _L =15pF		6.5	12.8	ns
		V _{CC} =3.0V to 3.6V, C _L =50pF		9.3	16.3	
		V _{CC} =4.5V to 5.5V, C _L =15pF		4.5	9	
		V _{CC} =4.5V to 5.5V, C _L =50pF		6.4	11	
Propagation Delay from Input ($\overline{\text{MR}}$) to Output(Qn)	t _{PHL}	V _{CC} =3.0V to 3.6V, C _L =15pF		5.3	12.8	ns
		V _{CC} =3.0V to 3.6V, C _L =50pF		7.6	16.3	
		V _{CC} =4.5V to 5.5V, C _L =15pF		4	8.6	
		V _{CC} =4.5V to 5.5V, C _L =50pF		5.8	10.6	
Maximum CP frequency	f _{MAX}	V _{CC} =3.0V to 3.6V, C _L =15pF	80	125		MHz
		V _{CC} =3.0V to 3.6V, C _L =50pF	50	75		
		V _{CC} =4.5V to 5.5V, C _L =15pF	125	175		
		V _{CC} =4.5V to 5.5V, C _L =50pF	85	115		

■ OPERATING CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C _{pd}	f=1MHZ, C _L =50pF		48		pF

■ TEST CIRCUIT AND WAVEFORMS

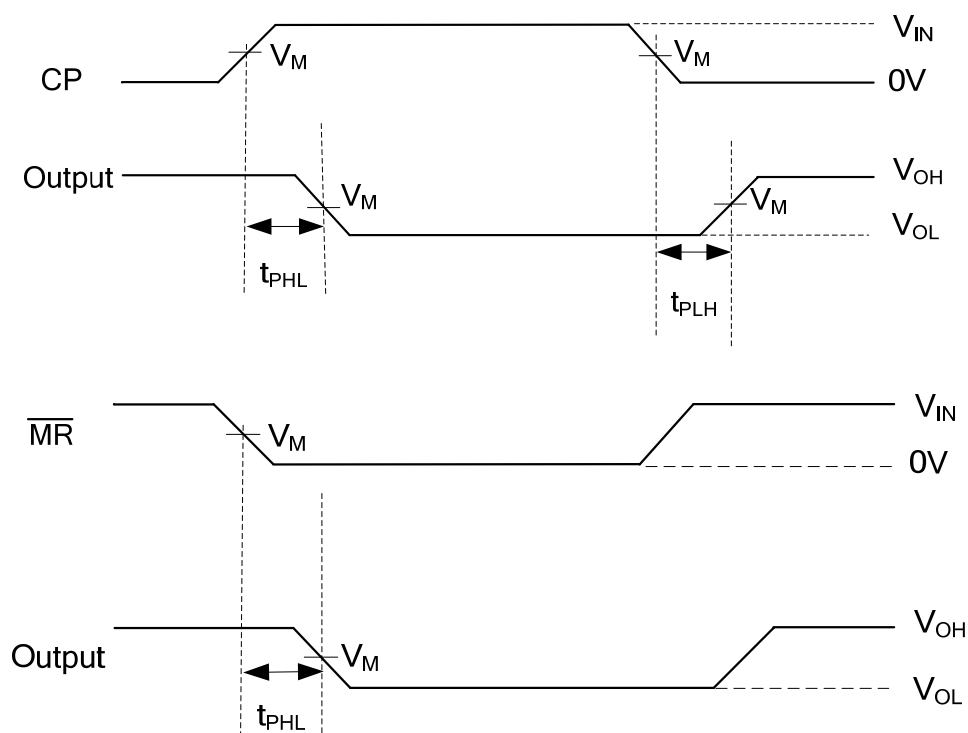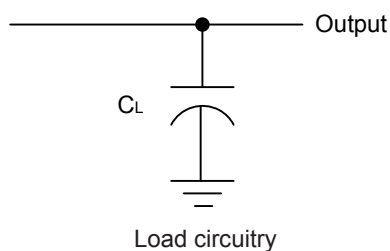

Note: $V_{IN}=V_{CC}$, $V_M=50\%V_{CC}$

Propagation delay waves

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.