


SCRs

DESCRIPTION

The UTC US112S/N is suitable to fit all modes of control found in applications such as overvoltage crowbar protection, motor control circuits in power tools and kitchen aids, in-rush current limiting circuits, capacitive discharge ignition, voltage regulation circuits...

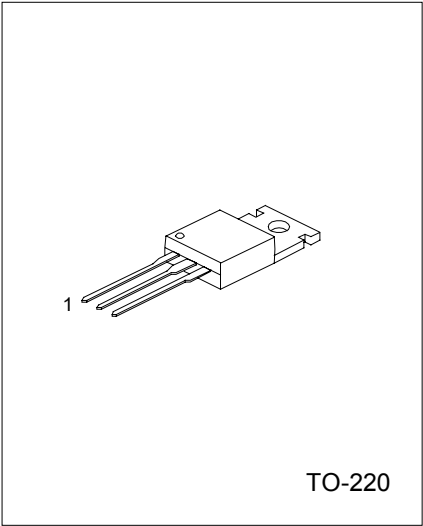

1: CATHODE 2: ANODE 3: GATE

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATING		UNIT
		US112S	US112N	
Repetitive peak off-state voltages US112S/N-4 US112S/N-6 US112S/N-8	V_{DRM} V_{RRM}	400 600 800		V
RMS on-state current (180° conduction angle) ($T_c = 105^\circ\text{C}$)	$I_{T(RMS)}$	12		A
Average on-state current (180° conduction angle) ($T_c = 105^\circ\text{C}$)	$I_{T(AV)}$	8		A
Non repetitive surge peak on-state current ($T_j = 25^\circ\text{C}$) $t_p=8.3\text{ms}$ $t_p=10\text{ms}$	I_{TSM}	146 140		A
I^2t Value for fusing ($t_p = 10\text{ ms}$, $T_j = 25^\circ\text{C}$)	I^2t	98		A ² S
Critical rate of rise of on-state current ($I_G = 2 \times I_{GT}$, $t_r \leq 100\text{ n s}$, $F = 60\text{ Hz}$, $T_j = 125^\circ\text{C}$,)	di/dt	50		A/ μs
Peak gate current ($t_p=20\mu\text{s}$, $T_j = 125^\circ\text{C}$)	I_{GM}	4		A
Maximum peak reverse gate voltage	V_{RGM}		5	V
Average gate power dissipation ($T_j = 125^\circ\text{C}$)	$P_{G(AV)}$	1		W
Storage junction temperature range	T_{stg}	$-40 \sim +150$		$^\circ\text{C}$
Operating junction temperature range	T_j	$-40 \sim +125$		$^\circ\text{C}$

UTC US112S(SENSITIVE) ELECTRICAL CHARACTERISTICS

(T_J=25°C unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	MAX.	UNIT
Gate trigger Current	I _{GT}	V _D = 12 V, R _L = 140Ω		200	μA
Gate trigger Voltage	V _{GT}	V _D = 12 V, R _L = 140Ω		0.8	V
Gate non-trigger voltage	V _{GD}	V _D = V _{DRM} , R _L = 3.3 kΩ, R _{GK} = 1kΩ T _J = 125°C	0.1		V
Reverse gate voltage	V _{RG}	I _{RG} = 10 μA	8		V
Holding Current	I _H	I _T = 50 mA, R _{GK} = 1 kΩ		5	mA
Latching Current	I _L	I _G = 1 mA, R _{GK} = 1 kΩ		6	mA
Circuit Rate Of Change Of off-state Voltage	dV/dt	V _D = 67 % V _{DRM} , R _{GK} = 220 Ω T _J = 125°C	5		V/μs
On-state voltage	V _{TM}	I _{TM} = 24A, t _p = 380 μs, T _J = 25°C		1.6	V
Threshold Voltage	V _{t0}	T _J = 125°C		0.85	V
Dynamic Resistance	R _d	T _J = 125°C		30	mΩ
Off-state Leakage Current	I _{DRM}	V _{DRM} = V _{RRM} , R _{GK} = 220 Ω T _J = 25°C		5	μA
	I _{RRM}	T _J = 125°C		2	mA

UTC US112N(STANDARD) ELECTRICAL CHARACTERISTICS

(T_J=25°C unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	MAX.	UNIT
Gate trigger Current	I _{GT}	V _D = 12 V, R _L = 33Ω	2	15	mA
Gate trigger Voltage	V _{GT}	V _D = 12 V, R _L = 33Ω		1.3	V
Gate non-trigger voltage	V _{GD}	V _D = V _{DRM} , R _L = 3.3 kΩ, T _J = 125°C	0.2		V
Holding Current	I _H	I _T = 500 mA, Gate open		30	mA
Latching Current	I _L	I _G = 1.2 I _{GT}		60	mA
Circuit Rate Of Change Of off-state Voltage	dV/dt	V _D = 67 % V _{DRM} , Gate open, T _J = 125°C	200		V/μs
On-state voltage	V _{TM}	I _{TM} = 24A, t _p = 380 μs, T _J = 25°C		1.6	V
Threshold Voltage	V _{t0}	T _J = 125°C		0.85	V
Dynamic Resistance	R _d	T _J = 125°C		30	mΩ
Off-state Leakage Current	I _{DRM}	V _{DRM} = V _{RRM} , T _J = 25°C		5	μA
	I _{RRM}	T _J = 125°C		2	mA

THERMAL RESISTANCES

PARAMETER	SYMBOL	VALUE	UNIT
Junction to case (DC)	R _{th(j-c)}	1.3	K/W
Junction to ambient	R _{th(j-a)}	60	K/W

Figure.1:Maximum average power dissipation vs average on-state current.

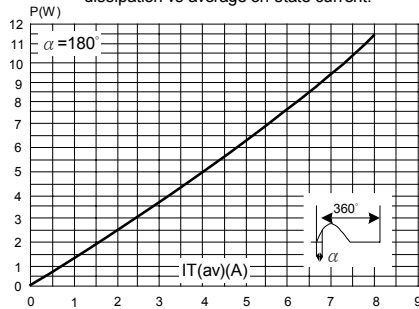


Figure.2:Average and D.C. on-state current vs case temperature

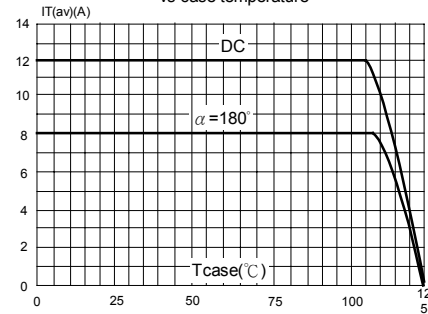


Fig.3-1:Relative variation of thermal impedance junction to case vs pulse duration.

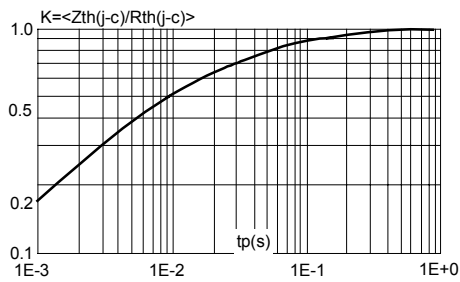


Fig.3-2:Relative variation of thermal impedance junction to ambient vs pulseduration (recommended pad layout,FR4 PC board)

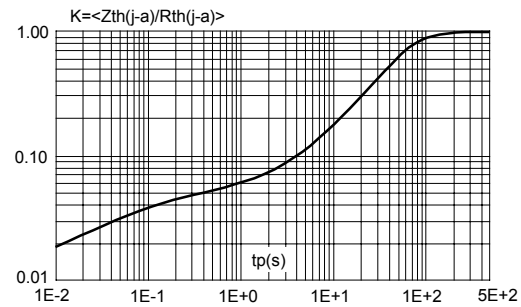


Figure.4-1:Relative variation of gate trigger current,holding current and latching vs junction temperature (US112S)

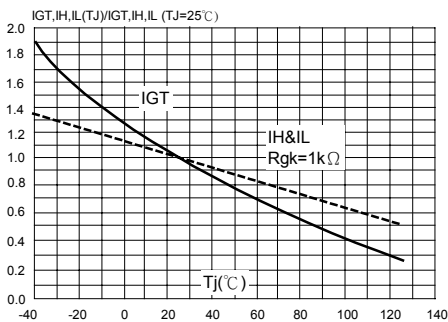


Figure.4-2: Relative variation of gate trigger current,holding current and latching current vs junction temperature (US112N).

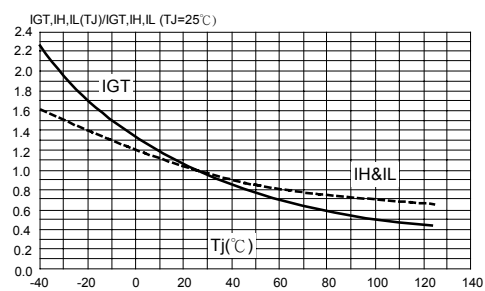


Figure.5:Relative variation of holding current vs gate-cathode resistance(typical values) (US112S)

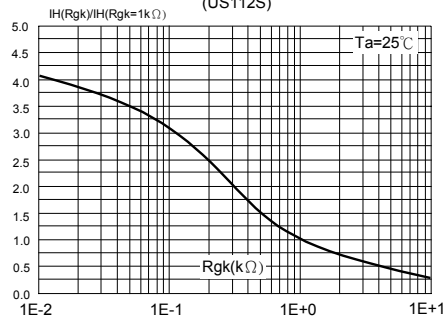


Fig.6: Relative variation of dV/dt immunity vs gate-cathode resistance(typical values) (US112S)

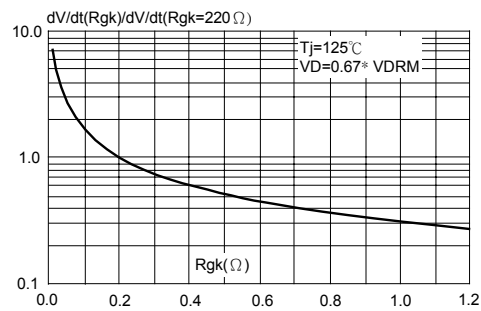


Fig.7: Relative variation of dV/dt immunity vs gate-cathode capacitance(typical values) (US112S)

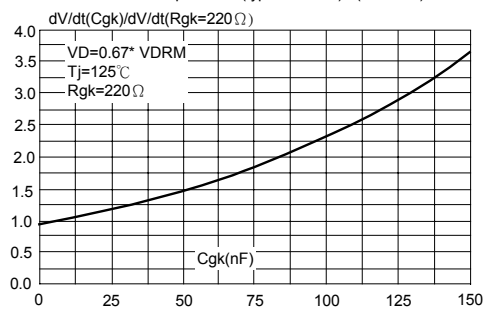


Fig.8: Surge peak on-state current vs number of cycles

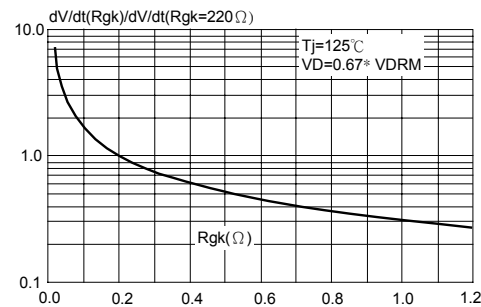


Fig.9:Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 10\text{ms}$, and corresponding values of I^2t .


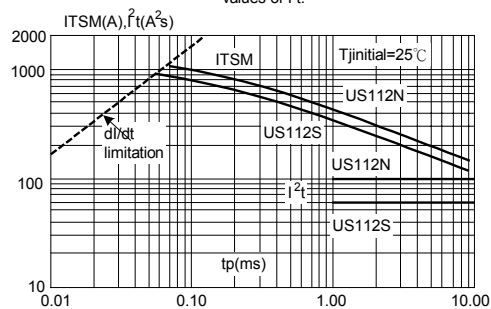


Fig.10: On-state characteristics(maximum values).

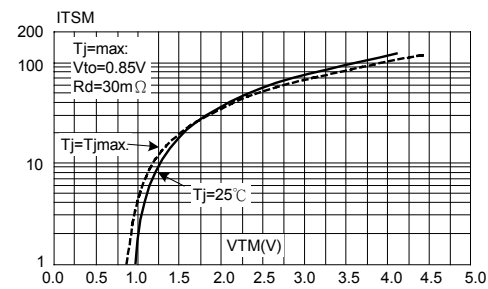

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.