



UM6K31N

Preliminary



Power MOSFET

SILICON N-CHANNEL MOSFET TRANSISTOR

DESCRIPTION

The UTC **UM6K31N** is a silicon N-channel MOS Field Effect Transistor. It can be used in switching applications.

SYMBOL

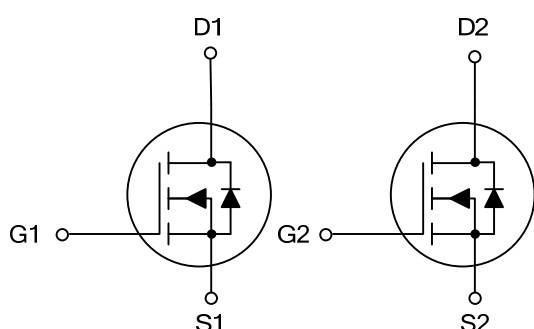


ORDERING INFORMATION

Ordering Number		Package	Pin Assignment						Packing
Lead Free	Halogen Free		1	2	3	4	5	6	
UM6K31NL-AL6-R	UM6K31NG-AL6-R	SOT-363	S1	G1	D2	S2	G2	D1	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

UM6K31NL - AL6 - R	
(1) Packing Type	(1) R: Tape Reel
(2) Package Type	(2) AL6: SOT-363
(3) Lead Free	(3) L: Lead Free, G: Halogen Free

MARKING



■ **ABSOLUTE MAXIMUM RATINGS** (Ta=25°C, it is the same rating for the Tr1 AND Tr2)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	60	V
Gate-Source Voltage		V_{GSS}	±20	V
Drain Current Continuous	Continuous	I_D	±250	mA
	Pulsed (Note1)	I_{DP}	±1	A
Source Current Continuous (Body Diode)	Continuous	I_S	125	mA
	Pulsed (Note1)	I_{SP}	1	A
Power Dissipation		P_D	150	mW
Channel Temperature		T_{CH}	150	°C
Storage Temperature		T_{STG}	-55~150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ **THERMAL RESISTANCE**

PARAMETER	SYMBOL	RATINGS	UNIT
Channel to Ambient	θ_{JA}	833	°C/W

■ **ELECTRICAL CHARACTERISTICS** (Ta =25°C, it is the same rating for the Tr1 And Tr2)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV _{DSS}	I _D =1mA, V _{GS} =0V	60			V
Drain-Source Leakage Current	I _{DSS}	V _{DS} =60V, V _{GS} =0V			1	μA
Gate- Source Leakage Current	I _{GSS}	V _{GS} = ±20 V, V _{DS} =0 V			±10	μA
ON CHARACTERISTICS						
Gate Threshold Voltage	V _{GS(TH)}	V _{DS} =10V, I _D =1mA	1.0		2.5	V
Static Drain-Source On-State Resistance	R _{DS(ON)} (Note1)	V _{GS} =10V, I _D =250mA		1.7	2.4	Ω
		V _{GS} =4.5V, I _D =250mA		2.1	3.0	
		V _{GS} =4.0V, I _D =250mA		2.3	3.2	
		V _{GS} =2.5V, I _D =10mA		3.0	12.0	
DYNAMIC PARAMETERS						
Input Capacitance	C _{ISS}	V _{GS} =0V, V _{DS} =25V, f=1MHz		15		pF
Output Capacitance	C _{OSS}			4.5		pF
Reverse Transfer Capacitance	C _{RSS}			2.0		pF
SWITCHING PARAMETERS						
Turn-ON Delay Time	t _{D(ON)} (Note1)	I _D =100mA, V _{DD} ≐30V, V _{GS} =10V, R _L ≐300Ω, R _G =10Ω See Fig 1-1.1-2		3.5		ns
Rise Time	t _R (Note1)			5		ns
Turn-OFF Delay Time	t _{D(OFF)} (Note1)			18		ns
Fall-Time	t _F (Note1)			28		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Drain-Source Diode Forward Voltage	V _{SD} (Note1)	I _S =250mA, V _{GS} =0V			1.2	V
Forward Transfer Admittance	Y _{fs} (Note1)	V _{DS} =10V, I _D =250mA	0.25			S

Note1: PW≤10μs DUTY CYCLE≤1%

■ TEST CIRCUIT

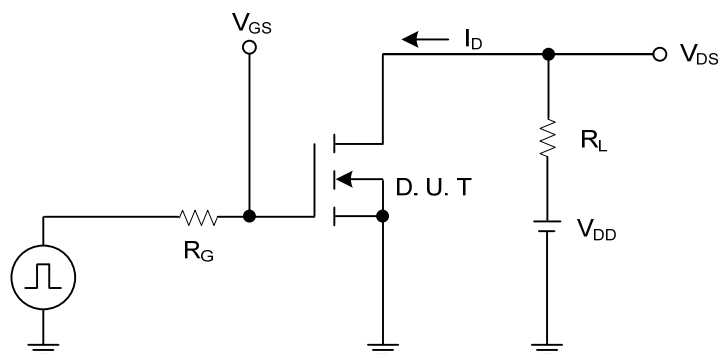


Fig.1-1 Switching Time Measurement Circuit

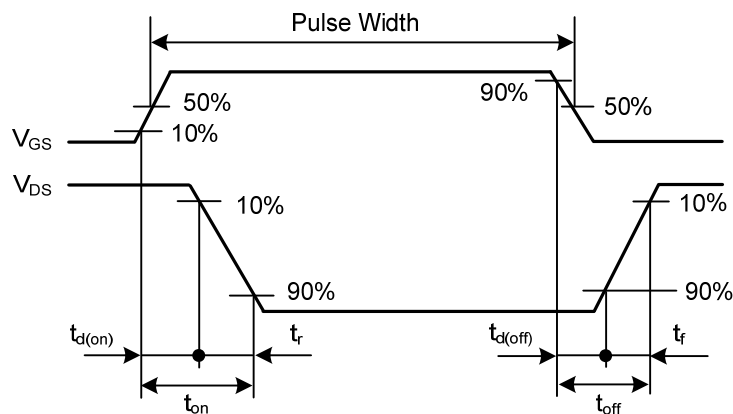


Fig.1-2 Switching Waveforms

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.