



U74LVC1G18

Preliminary

CMOS IC

1-OF-2 NON-INVERTING DEMULTIPLEXER WITH 3-STATE DESELECTED OUTPUT

DESCRIPTION

The U74LVC1G18 is a 1-of-2 non-inverting demultiplexer with 3-state output. When the select input S is low data passes from A (input) to 1Y (output) and 2Y (output) is in the high-impedance state. When the select input S is high data passes from A (input) to 2Y (output) and 1Y (output) is in the high-impedance state.

The U74LVC1G18 is designed for 1.65V to 5.5V operation and it can be driven from either 3.3V or 5.5V devices. Therefore, it can be used in a mixed 3.3V and 5V environment.

The U74LVC1G18 is fully specified for partial-power-down applications using I_{OFF}. The I_{OFF} circuitry disables the outputs and prevents damaging current backflow through the device when it is powered down.


FEATURES

- * Wide supply voltage range from 1.65V to 5.5V
- * Max t_{PD} of 3.4 ns at 3.3V
- * Up to 5.5V inputs accept voltages
- * Low power consumption, I_{CC} = 10 μA (Max.)
- * ±24 mA output driver at 3.3V
- * Typical V_{OLP} (Output Ground Bounce) < 0.8V, V_{CC} = 3.3 V, T_A = 25 °C
- * Typical V_{OHV} (Output V_{OH} undershoot) > 2V, V_{CC} = 3.3 V, T_A = 25 °C
- * I_{OFF} supports partial-power-down mode operation


ORDERING INFORMATION

| Ordering Number | | Package | Packing |
|-------------------|-------------------|---------|-----------|
| Lead Free | Halogen Free | | |
| U74LVC1G18L-AL6-R | U74LVC1G18G-AL6-R | SOT-363 | Tape Reel |
| U74LVC1G18L-AG6-R | U74LVC1G18G-AG6-R | SOT-26 | Tape Reel |


| | |
|---|---|
| <p>U74LVC1G18L-AL6-R</p> <p>(1) Packing Type (2) Package Type (3) Lead Free</p> | <p>(1) R: Tape Reel (2) AL6: SOT-363, AG6: SOT-26 (3) G: Halogen Free, L: Lead Free</p> |
|---|---|

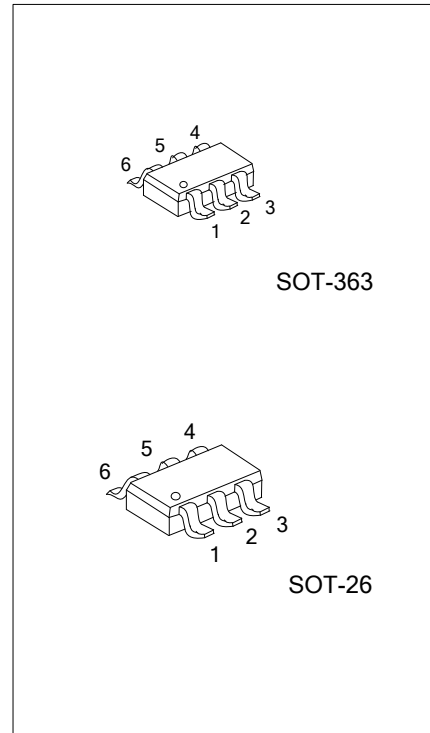

MARKING

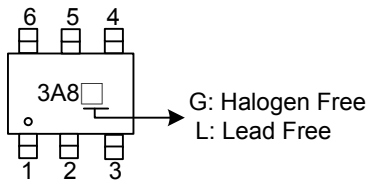

PIN CONFIGURATION

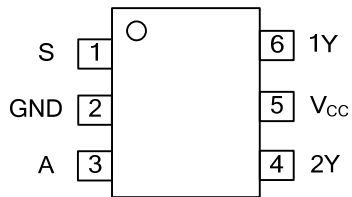


FUNCTION TABLE

| INPUTS | | OUTPUT | |
|--------|---|----------------|----------------|
| S | A | Y ₀ | Y ₁ |
| L | L | L | Z |
| L | H | H | Z |
| H | L | Z | L |
| H | H | Z | H |

H=High Level

L=Low Level

LOGIC DIAGRAM (positive logic)

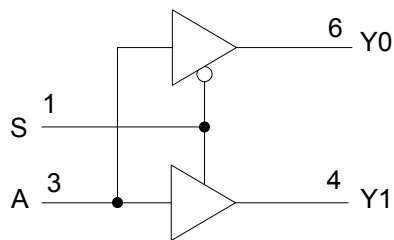

■ ABSOLUTE MAXIMUM RATING (unless otherwise specified)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|--|---|--------------------|------------------|
| Supply Voltage | V_{CC} | -0.5~6.5 | V |
| Input Voltage | V_{IN} | -0.5~6.5 | V |
| Output Voltage (any output in the high-impedance or power-off state) | V_{OUT} | -0.5~6.5 | V |
| Output Voltage (any output in the high or low state) | V_{OUT} | -0.5~ $V_{CC}+0.5$ | V |
| Input Clamp Current | I_{IK} | -50 | mA |
| Output Clamp Current | I_{OK} | -50 | mA |
| Output Current | I_{OUT} | ± 50 | mA |
| V_{CC} or GND Current | I_{CC} | ± 100 | mA |
| Power Dissipation | $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ P_{tot} | 250 | mW |
| Storage Temperature | T_{STG} | -65 ~ +150 | $^\circ\text{C}$ |

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

■ THERMAL DATA

| PARAMETER | SYMBOL | RATINGS | UNIT |
|---------------------|---------|---------|---------------------------|
| Junction to Ambient | SOT-363 | 350 | $^\circ\text{C}/\text{W}$ |
| | SOT-26 | 230 | |

■ RECOMMENDED OPERATING CONDITIONS

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | MAX | UNIT |
|------------------------------------|---------------------|---|-----------------|-----------------|------------------|
| Supply Voltage | V_{CC} | Operating | 1.65 | 5.5 | V |
| | | Data retention only | 1.5 | | |
| Input Voltage | High | $V_{CC} = 1.65\text{V}$ to 1.95V | $0.65^* V_{CC}$ | | V |
| | | $V_{CC} = 2.3\text{V}$ to 2.7V | 1.7 | | |
| | | $V_{CC} = 3\text{V}$ to 3.6V | 2 | | |
| | | $V_{CC} = 4.5\text{V}$ to 5.5V | $0.7^* V_{CC}$ | | |
| | Low | $V_{CC} = 1.65\text{V}$ to 1.95V | | $0.35^* V_{CC}$ | V |
| | | $V_{CC} = 2.3\text{V}$ to 2.7V | | 0.7 | |
| | | $V_{CC} = 3\text{V}$ to 3.6V | | 0.8 | |
| | | $V_{CC} = 4.5\text{V}$ to 5.5V | | $0.3^* V_{CC}$ | |
| Input Voltage | V_{IN} | | 0 | 5.5 | V |
| Output Voltage | V_{OUT} | High or low state | 0 | V_{CC} | V |
| Output Current | High | $V_{CC}=1.65\text{V}$ | | -4 | mA |
| | | $V_{CC}=2.3\text{V}$ | | -8 | |
| | | $V_{CC}=3\text{V}$ | | -16 | |
| | | $V_{CC}=4.5\text{V}$ | | -24 | |
| | | $V_{CC}=4.5\text{V}$ | | -32 | |
| | Low | $V_{CC}=1.65\text{V}$ | | 4 | mA |
| | | $V_{CC}=2.3\text{V}$ | | 8 | |
| | | $V_{CC}=3\text{V}$ | | 16 | |
| | | $V_{CC}=3\text{V}$ | | 24 | |
| | | $V_{CC}=4.5\text{V}$ | | 32 | |
| Input Transition Rise or Fall Rate | $\Delta t/\Delta v$ | $V_{CC}=1.8\pm 0.15\text{V}$, $2.5\pm 0.2\text{V}$ | | 20 | ns/V |
| | | $V_{CC}=3.3\pm 0.3\text{V}$ | | 10 | |
| | | $V_{CC}=5.0\pm 0.5\text{V}$ | | 5 | |
| Operating Temperature | T_A | | -40 | 85 | $^\circ\text{C}$ |

■ **ELECTRICAL CHARACTERISTICS** ($T_A = 25^\circ\text{C}$, unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT | |
|---|-----------------|---|---|----------------|----------|---------------|---|
| Output Voltage | High | V_{OH} | $I_{OH} = -100 \mu\text{A}$, $V_{CC} = 1.65\text{V to } 5.5\text{V}$ | $V_{CC} - 0.1$ | | | V |
| | | | $I_{OH} = -4 \text{ mA}$, $V_{CC} = 1.65\text{V}$ | 1.2 | | | |
| | | | $I_{OH} = -8 \text{ mA}$, $V_{CC} = 2.3\text{V}$ | 1.9 | | | |
| | | | $I_{OH} = -16 \text{ mA}$, $V_{CC} = 3\text{V}$ | 2.4 | | | |
| | | | $I_{OH} = -24 \text{ mA}$, $V_{CC} = 3\text{V}$ | 2.3 | | | |
| | | | $I_{OH} = -32 \text{ mA}$, $V_{CC} = 4.5\text{V}$ | 3.8 | | | |
| | Low | V_{OL} | $I_{OL} = 100 \mu\text{A}$, $V_{CC} = 1.65\text{V to } 5.5\text{V}$ | | | 0.1 | V |
| | | | $I_{OL} = 4 \text{ mA}$, $V_{CC} = 1.65\text{V}$ | | | 0.45 | |
| | | | $I_{OL} = 8 \text{ mA}$, $V_{CC} = 2.3\text{V}$ | | | 0.3 | |
| | | | $I_{OL} = 16 \text{ mA}$, $V_{CC} = 3\text{V}$ | | | 0.4 | |
| $I_{OL} = 24 \text{ mA}$, $V_{CC} = 3\text{V}$ | | | | | 0.55 | | |
| | | $I_{OL} = 32 \text{ mA}$, $V_{CC} = 4.5\text{V}$ | | | 0.55 | | |
| Input Leakage Current (A or S inputs) | $I_{I(LEAK)}$ | $V_{IN} = 5.5\text{V or GND}$, $V_{CC} = 0 \text{ to } 5.5\text{V}$ | | | ± 5 | μA | |
| OFF-state Current | I_{OFF} | $V_{IN} \text{ or } V_O = 5.5\text{V}$, $V_{CC} = 0\text{V}$ | | | ± 10 | μA | |
| High-impedance state Current | I_{OZ} | $V_O = 0 \text{ to } 5.5\text{V}$, $V_{CC} = 3.6\text{V}$ | | | 10 | μA | |
| Quiescent Supply Current | I_{CC} | $V_{IN} = 5.5\text{V or GND}$, $I_{OUT} = 0$, $V_{CC} = 1.65\text{V to } 5.5\text{V}$ | | | 10 | μA | |
| Additional quiescent Supply Current | ΔI_{CC} | One input at $V_{CC} - 0.6\text{V}$; other inputs at V_{CC} or GND ; $V_{CC} = 3\text{V to } 5.5\text{V}$ | | | 500 | μA | |
| Input Capacitance | C_{IN} | $V_{IN} = V_{CC} \text{ or } \text{GND}$, $V_{CC} = 3.3\text{V}$ | | 4 | | pF | |
| Output Capacitance | C_{OUT} | $V_{OUT} = V_{CC} \text{ or } \text{GND}$, $V_{CC} = 3.3\text{V}$ | | 6 | | pF | |


■ **SWITCHING CHARACTERISTICS** ($T_A = 25^\circ\text{C}$)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | MAX | UNIT |
|--|---|---|-----|------|------|
| Propagation delay from input A to output Y | t_{PLH} t_{PHL} (t_{pd}) | $V_{CC} = 1.8 \pm 0.15\text{V}$, $C_L = 15\text{pF}$, $R_L = 1\text{M}\Omega$ | 2.3 | 8.4 | ns |
| | | $V_{CC} = 2.5 \pm 0.20\text{V}$, $C_L = 15\text{pF}$, $R_L = 1\text{M}\Omega$ | 1.1 | 4.2 | |
| | | $V_{CC} = 3.3 \pm 0.30\text{V}$, $C_L = 15\text{pF}$, $R_L = 1\text{M}\Omega$ | 1.1 | 3.4 | |
| | | $V_{CC} = 5.0 \pm 0.50\text{V}$, $C_L = 15\text{pF}$, $R_L = 1\text{M}\Omega$ | 0.8 | 2.7 | |
| Propagation delay from input A to output Y | t_{PLH} t_{PHL} (t_{pd}) | $V_{CC} = 1.8 \pm 0.15\text{V}$, $C_L = 30\text{pF}$, $R_L = 1\text{K}\Omega$ | 3.5 | 9.3 | ns |
| | | $V_{CC} = 2.5 \pm 0.20\text{V}$, $C_L = 30\text{pF}$, $R_L = 500\Omega$ | 1.7 | 5 | |
| | | $V_{CC} = 3.3 \pm 0.30\text{V}$, $C_L = 50\text{pF}$, $R_L = 500\Omega$ | 1.5 | 4.2 | |
| | | $V_{CC} = 5.0 \pm 0.50\text{V}$, $C_L = 50\text{pF}$, $R_L = 500\Omega$ | 0.7 | 3.2 | |
| Propagation delay from input S to output Y | t_{PZL} t_{PZH} (t_{en}) | $V_{CC} = 1.8 \pm 0.15\text{V}$, $C_L = 30\text{pF}$, $R_L = 1\text{K}\Omega$ | 3.6 | 10.2 | ns |
| | | $V_{CC} = 2.5 \pm 0.20\text{V}$, $C_L = 30\text{pF}$, $R_L = 500\Omega$ | 1.7 | 5.6 | |
| | | $V_{CC} = 3.3 \pm 0.30\text{V}$, $C_L = 50\text{pF}$, $R_L = 500\Omega$ | 1.5 | 4.6 | |
| | | $V_{CC} = 5.0 \pm 0.50\text{V}$, $C_L = 50\text{pF}$, $R_L = 500\Omega$ | 0.9 | 3.4 | |
| Propagation delay from input S to output Y | t_{PLZ} t_{PHZ} (t_{dis}) | $V_{CC} = 1.8 \pm 0.15\text{V}$, $C_L = 30\text{pF}$, $R_L = 1\text{K}\Omega$ | 1.9 | 12.7 | ns |
| | | $V_{CC} = 2.5 \pm 0.20\text{V}$, $C_L = 30\text{pF}$, $R_L = 500\Omega$ | 1 | 5.3 | |
| | | $V_{CC} = 3.3 \pm 0.30\text{V}$, $C_L = 50\text{pF}$, $R_L = 500\Omega$ | 1.1 | 4.9 | |
| | | $V_{CC} = 5.0 \pm 0.50\text{V}$, $C_L = 50\text{pF}$, $R_L = 500\Omega$ | 0.5 | 3.3 | |

■ **OPERATING CHARACTERISTICS** ($T_A = 25^\circ\text{C}$)

| PARAMETER | SYMBOL | TEST CONDITIONS | TYP | UNIT |
|-------------------------------|----------|---|-----|------|
| Power Dissipation Capacitance | C_{pd} | $V_{CC} = 1.8\text{V}$, $f = 10\text{MHz}$ | 17 | pF |
| | | $V_{CC} = 2.5\text{V}$, $f = 10\text{MHz}$ | 17 | |
| | | $V_{CC} = 3.3\text{V}$, $f = 10\text{MHz}$ | 18 | |
| | | $V_{CC} = 5.0\text{V}$, $f = 10\text{MHz}$ | 21 | |


■ TEST CIRCUIT AND WAVEFORMS

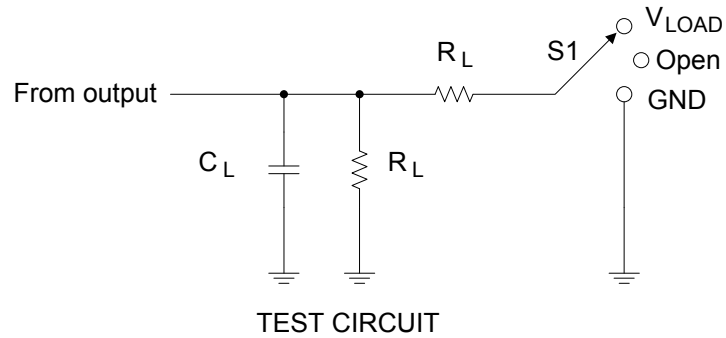


| TEST | S1 |
|-------------------|------------|
| t_{PLH}/t_{PHL} | Open |
| t_{PLZ}/t_{PZL} | V_{LOAD} |
| t_{PHZ}/t_{PZH} | GND |

| V_{CC} | Inputs | | V_M | V_{LOAD} | C_L | R_L | V_{Δ} |
|------------|----------|------------|------------|------------------|-------|-------|--------------|
| | V_{IN} | t_r, t_f | | | | | |
| 1.8V±0.15V | V_{CC} | ≤2ns | $V_{CC}/2$ | $2 \cdot V_{CC}$ | 15pF | 1MΩ | 0.15V |
| 2.5V±0.2V | V_{CC} | ≤2ns | $V_{CC}/2$ | $2 \cdot V_{CC}$ | 15pF | 1MΩ | 0.15V |
| 3.3V±0.3V | 3V | ≤2.5ns | 1.5V | 6V | 15pF | 1MΩ | 0.3V |
| 5V±0.5V | V_{CC} | ≤2.5ns | $V_{CC}/2$ | $2 \cdot V_{CC}$ | 15pF | 1MΩ | 0.3V |
| 1.8V±0.15V | V_{CC} | ≤2ns | $V_{CC}/2$ | $2 \cdot V_{CC}$ | 30pF | 1KΩ | 0.15V |
| 2.5V±0.2V | V_{CC} | ≤2ns | $V_{CC}/2$ | $2 \cdot V_{CC}$ | 30pF | 500Ω | 0.15V |
| 3.3V±0.3V | 3V | ≤2.5ns | 1.5V | 6V | 50pF | 500Ω | 0.3V |
| 5V±0.5V | V_{CC} | ≤2.5ns | $V_{CC}/2$ | $2 \cdot V_{CC}$ | 50pF | 500Ω | 0.3V |

■ TEST CIRCUIT AND WAVEFORMS(Cont.)

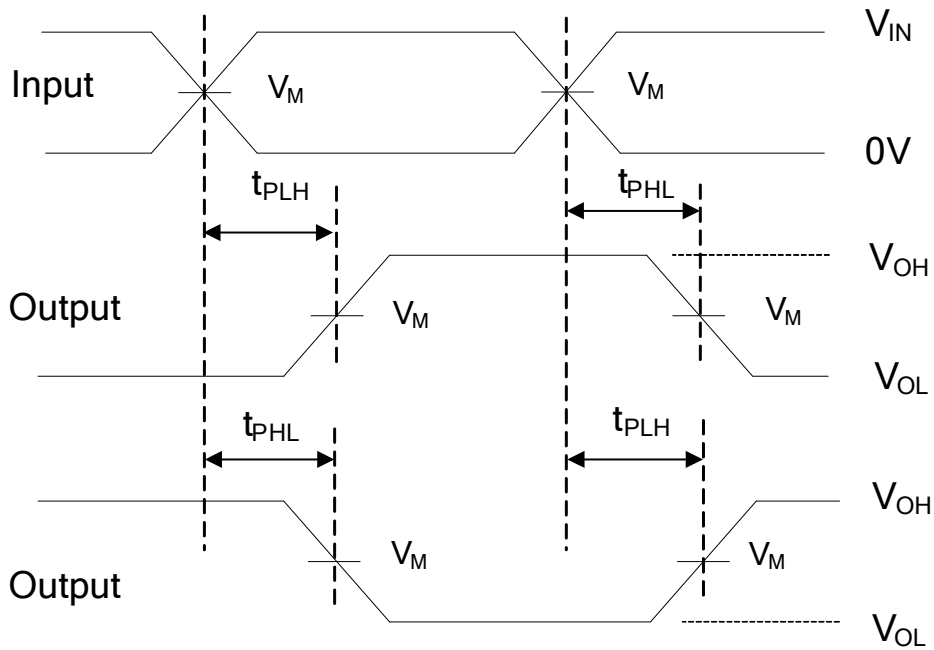

PROPAGATION DELAY TIMES
INVERTING AND NONINVERTING OUTPUTS

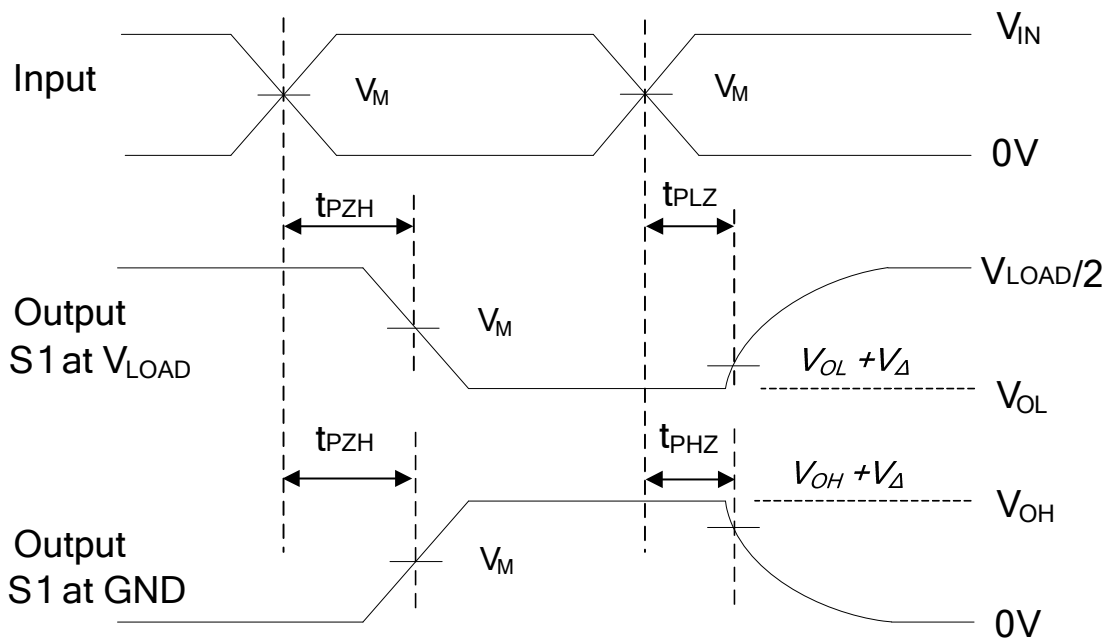

VOLTAGE WAVEFORMS ENABLE AND DISABLE TIMES

Notes: 1. C_L includes probe and jig capacitance.

2. All input pulses are supplied by generators having the following characteristics: PRR \leq 10MHz, $Z_0 = 50\Omega$.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.