



UM609

Preliminary

LINEAR INTEGRATED CIRCUIT

DUAL OPERATIONAL AMPLIFIER AND CURRENT CONTROLLER

DESCRIPTION

The UTC UM609 is a monolithic IC that includes one independent op-amp and another op-amp for which the non inverting input is wired to a 2.5V fixed voltage reference. This device is offering space and cost saving in many applications like power supply management or switching battery chargers.

FEATURES

OPERATIONAL AMPLIFIER



- \* Low input offset voltage: 0.5mV typ. for UTC UM609
\* Low supply current: 75uA/Per OP AMP.(@ VCC=5V)
\* Medium bandwidth(unity gain): 1MHz
\* Large output voltage swing: 0V ~ (VCC-1.5V)
\* Wide power supply range: 3V~36V

VOLTAGE REFERENCE


- \* Fixed output voltage reference 2.5V
\* Reference voltage precision ±1%
\* Sink current capability: 0.05~80mA
\* Typical output impedance: 0.2Ω

ORDERING INFORMATION

Table with 4 columns: Ordering Number (Lead Free, Halogen Free), Package, Packing. Rows include UM609L-S08-T, UM609G-S08-T, UM609L-S08-R, UM609G-S08-R.

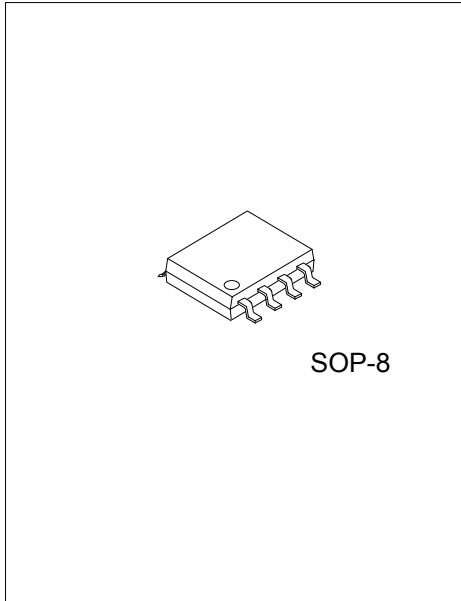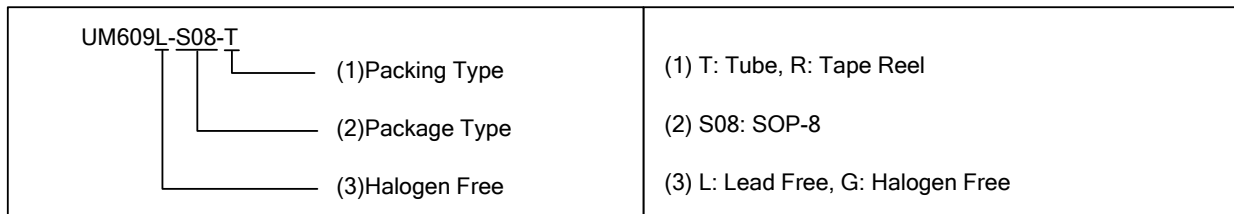


■ PIN CONFIGURATION

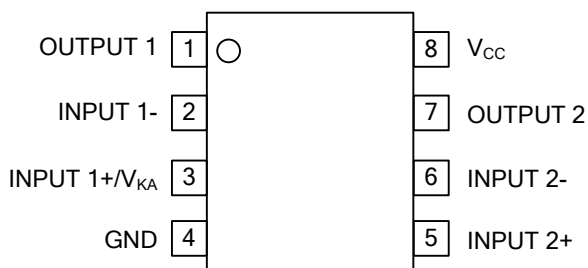

■ PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	OUTPUT 1	Output of Channel 1
2	INPUT 1-	Inverting Input of Channel 1
3	INPUT 1+/V <sub>KA</sub>	Non-Inverting Input of Channel 1 / Cathode of the Zener voltage
4	GND	Ground
5	INPUT 2+	Non-Inverting Input of Channel 2
6	INPUT 2-	Inverting Input of Channel 2
7	OUTPUT 2	Output of Channel 2
8	V <sub>CC</sub>	Supply Voltage

■ BLOCK DIAGRAM

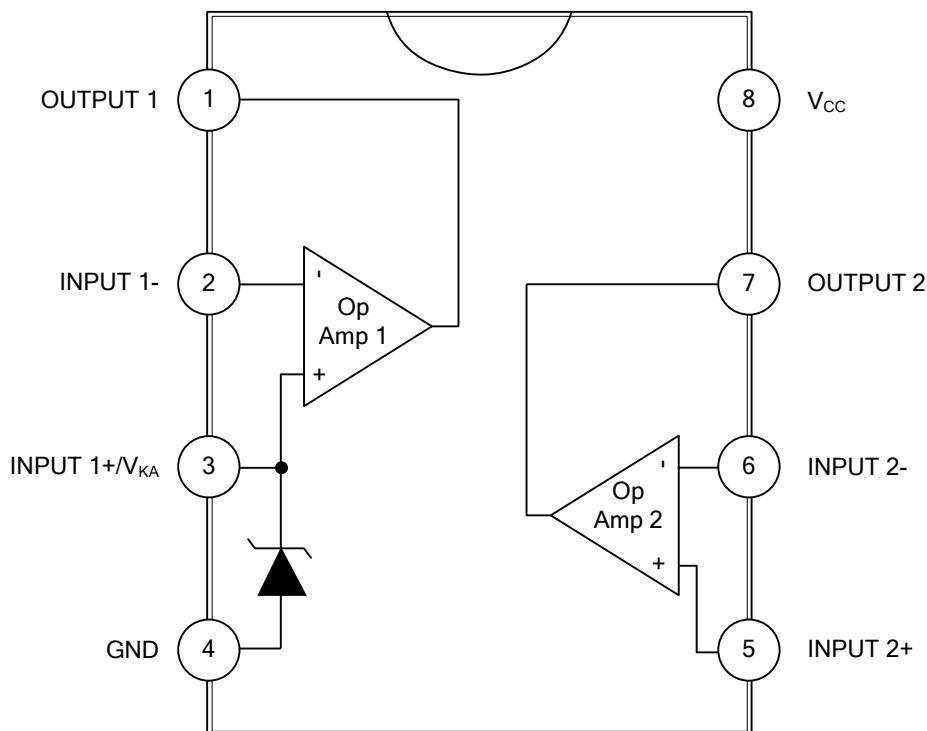

■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Power Supply Voltage ( $V_{CC}$ to GND)	$V_{CC}$	40	V
Op Amp 1 and 2 Input Voltage Range (Pins 2, 5, 6)	$V_{IN}$	-0.3~ $V_{CC}+0.3$	V
Op Amp 2 Input Differential Voltage (Pins 5, 6)	$V_{ID}$	40	V
Voltage Reference Cathode Current (Pin 3)	$I_K$	100	mA
Power Dissipation ( $T_A=25^\circ\text{C}$ )	$P_D$	500	mW
Operating Junction Temperature	$T_J$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-65~150	$^\circ\text{C}$
Lead Temperature (Soldering 10s)	$T_{LEAD}$	260	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	$V_{CC}$	3~36	V
Ambient Temperature	$T_A$	-40~105	$^\circ\text{C}$

■ ELECTRICAL CHARACTERISTICS

(Operating Conditions:  $V_{CC}=+5\text{V}$ ,  $T_A=25^\circ\text{C}$  unless otherwise specified.)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP.	MAX	UNIT	
Total Supply Current, Excluding Current in Voltage Reference	$I_{CC}$	$V_{CC}=5\text{V}$ , no load, $-40^\circ\text{C}\leq T_A\leq 105^\circ\text{C}$		0.15	0.25	mA	
		$V_{CC}=30\text{V}$ , no load, $-40^\circ\text{C}\leq T_A\leq 105^\circ\text{C}$		0.20	0.30	mA	
<b>Voltage Reference Section</b>							
Reference Voltage	$V_{REF}$	$I_K=10\text{mA}$	$T_A=25^\circ\text{C}$	2.475	2.50	2.525	V
			$-40^\circ\text{C}\leq T_A\leq 105^\circ\text{C}$	2.45	2.50	2.55	V
Reference Voltage Deviation Over Full Temperature Range		$I_K=10\text{mA}$ , $T_A=-40\sim 105^\circ\text{C}$		5	24	mV	
Minimum Cathode Current for Regulation				0.01	0.05	mA	
Dynamic Impedance		$I_K=1.0\sim 80\text{mA}$ , $f<1\text{kHz}$		0.2	0.5	$\Omega$	
<b>Op Amp 1 Section</b> ( $V_{CC}=5\text{V}$ , $V_O=1.4\text{V}$ , $T_A=25^\circ\text{C}$ , unless otherwise noted)							
Input Offset Voltage	$V_{i(OFF)}$		$T_A=25^\circ\text{C}$		0.5	3	mV
			$T_A=-40\sim 105^\circ\text{C}$			5	mV
Input Offset Voltage Temperature Drift	$DV_{i(OFF)}$		$T_A=-40\sim 105^\circ\text{C}$		7	$\mu\text{V}/^\circ\text{C}$	
Input Bias Current (Inverting Input Only)	$I_{i(BIAS)}$		$T_A=25^\circ\text{C}$		20	150	nA
Large Signal Voltage Gain	$A_{VD}$	$V_{CC}=15\text{V}$ , $R_L=2\text{k}\Omega$ , $V_O=1.4\sim 11.4\text{V}$		85	100	dB	
Power Supply Rejection Ratio	PSRR	$V_{CC}=5\sim 30\text{V}$		70	90	dB	
Output Current	Source	$I_{SOURCE}$	$V_{CC}=15\text{V}$ , $V_{ID}=1\text{V}$ , $V_O=2\text{V}$		20	40	mA
	Sink	$I_{SINK}$	$V_{CC}=15\text{V}$ , $V_{ID}=-1\text{V}$ , $V_O=2\text{V}$		7	20	mA
Output Voltage Swing (High)	$V_{OH}$	$V_{CC}=30\text{V}$ , $R_L=10\text{k}\Omega$ , $V_{ID}=1\text{V}$		27	28	V	
Output Voltage Swing (Low)	$V_{OL}$	$V_{CC}=30\text{V}$ , $R_L=10\text{k}\Omega$ , $V_{ID}=-1\text{V}$		17	100	mV	
Slew Rate	SR	$V_{CC}=18\text{V}$ , $R_L=2\text{k}\Omega$ , $A_v=1$ , $V_{IN}=0.5\sim 2\text{V}$ , $C_L=100\text{pF}$		0.2	0.5	$\text{V}/\mu\text{s}$	
Unity Gain Bandwidth	GBP	$V_{CC}=30\text{V}$ , $R_L=2\text{k}\Omega$ , $C_L=100\text{pF}$		0.7	1.0	MHz	
<b>Op Amp 2 Section</b> ( $V_{CC}=5\text{V}$ , $V_O=1.4\text{V}$ , $T_A=25^\circ\text{C}$ , unless otherwise noted)							
Input Offset Voltage	$V_{i(OFF)}$		$T_A=25^\circ\text{C}$		0.5	3	mV
			$T_A=-40\sim 105^\circ\text{C}$			5	mV
Input Offset Voltage Temperature Drift	$DV_{i(OFF)}$		$T_A=-40\sim 105^\circ\text{C}$		7	$\mu\text{V}/^\circ\text{C}$	

### ■ ELECTRICAL CHARACTERISTICS

(Operating Conditions:  $V_{CC}=+5V$ ,  $T_A=25^{\circ}C$  unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP.	MAX	UNIT	
Input Offset Current	II(OFF)	$T_A=25^{\circ}C$		2	30	nA	
Input Bias Current	II(BIAS)	$T_A=25^{\circ}C$		20	150	nA	
Input Voltage Range	VI	$V_{CC}=0\sim 36V$	0		$V_{CC}-1.5$	V	
Common Mode Rejection Ratio	CMRR	$T_A=25^{\circ}C$ , $V_{CM}=0\sim 3.5V$	70	85		dB	
Large Signal Voltage Gain	AVD	$V_{CC}=15V$ , $R_L=2k\Omega$ , $V_O=1.4\sim 11.4V$	85	100		dB	
Power Supply Rejection Ratio	PSRR	$V_{CC}=5\sim 30V$	70	90		dB	
Output Current	Source	$I_{SOURCE}$	$V_{CC}=15V$ , $V_{ID}=1V$ , $V_O=2V$	20	40		mA
	Sink	$I_{SINK}$	$V_{CC}=15V$ , $V_{ID}=-1V$ , $V_O=2V$	7	20		mA
Output Voltage Swing (High)	$V_{OH}$	$V_{CC}=30V$ , $R_L=10k\Omega$ , $V_{ID}=1V$	27	28		V	
Output Voltage Swing (Low)	$V_{OL}$	$V_{CC}=30V$ , $R_L=10k\Omega$ , $V_{ID}=-1V$		17	100	mV	
Slew Rate	SR	$V_{CC}=18V$ , $R_L=2k\Omega$ , $A_V=1$ , $V_{IN}=0.5\sim 2V$ , $C_L=100pF$	0.2	0.5		V/ $\mu s$	
Unity Gain Bandwidth	GBP	$V_{CC}=30V$ , $R_L=2k\Omega$ , $C_L=100pF$	0.7	1.0		MHz	

■ TYPICAL APPLICATION CIRCUIT

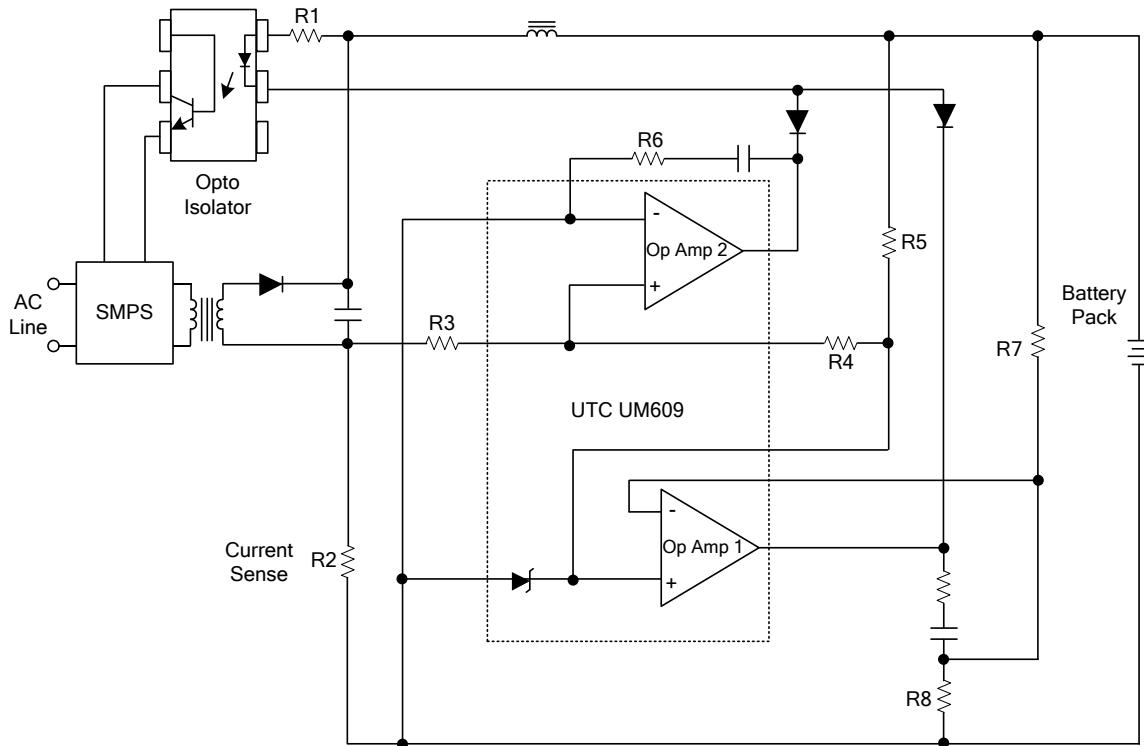

Application of UTC UM609 in a Constant Current and Constant Voltage Charger

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.