

Silicon Power Schottky Diode


$V_{RRM} = 10\text{ V} - 100\text{ V}$

$I_F = 60\text{ A}$

Features

- High Surge Capability
- Types up to 100 V V_{RRM}

D61-3SM Package



Maximum ratings, at $T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	FST6340SM	FST6345SM	FST6360SM	FST6380SM	FST63100SM	Unit
Repetitive peak reverse voltage	V_{RRM}		40	45	60	80	100	V
RMS reverse voltage	V_{RMS}		28	32	42	56	70	V
DC blocking voltage	V_{DC}		40	45	60	80	100	V
Continuous forward	I_F	$T_C \leq 105\text{ °C}$	60	60	60	60	60	A
Surge non-repetitive forward current, Half Sine Wave	$I_{F,SM}$	$T_C = 25\text{ °C}$, $t_p = 8.3\text{ ms}$	600	600	600	600	600	A
Operating temperature	T_j		-40 to 125	-40 to 125	-40 to 125	-40 to 125	-40 to 125	°C
Storage temperature	T_{stg}		-40 to 125	-40 to 125	-40 to 125	-40 to 125	-40 to 125	°C

Electrical characteristics, at $T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	FST6340SM	FST6345SM	FST6360SM	FST6380SM	FST63100SM	Unit
Diode forward voltage	V_F	$I_F = 60\text{ A}$, $T_j = 25\text{ °C}$	0.55	0.55	0.75	0.84	0.84	V
Reverse current	I_R	$V_R = 10\text{ V}$, $T_j = 25\text{ °C}$	3	3	3	3	3	mA
		$V_R = 10\text{ V}$, $T_j = 125\text{ °C}$	500	500	500	500	500	

Thermal characteristics

Thermal resistance, junction - case	R_{thJC}		1.2	1.2	1.2	1.2	1.2	°C/W
-------------------------------------	------------	--	-----	-----	-----	-----	-----	------

Figure .1-Typical Forward Charac teristics

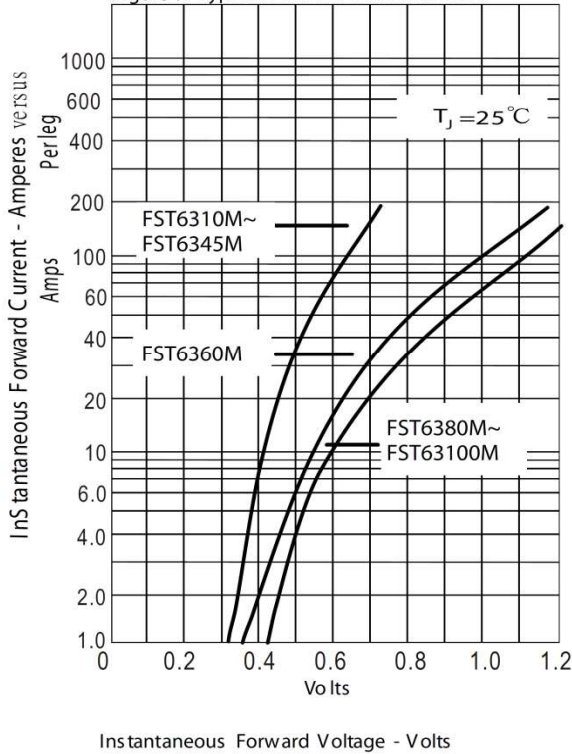


Figure .2- Forward Deratig Curve

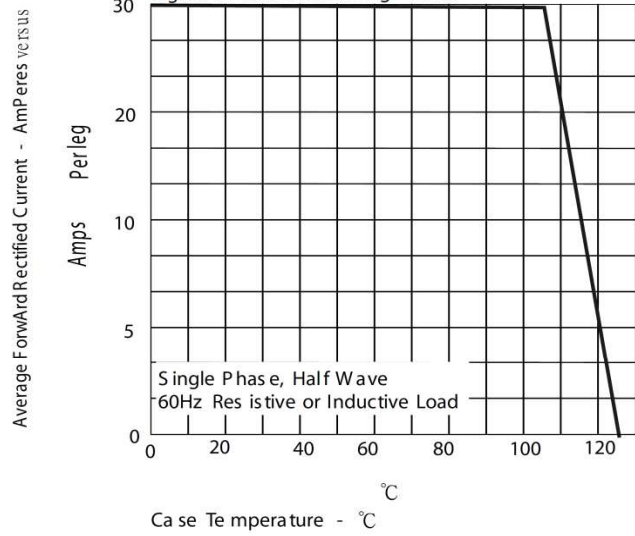


Figure .3- Peak Forward Surge Current

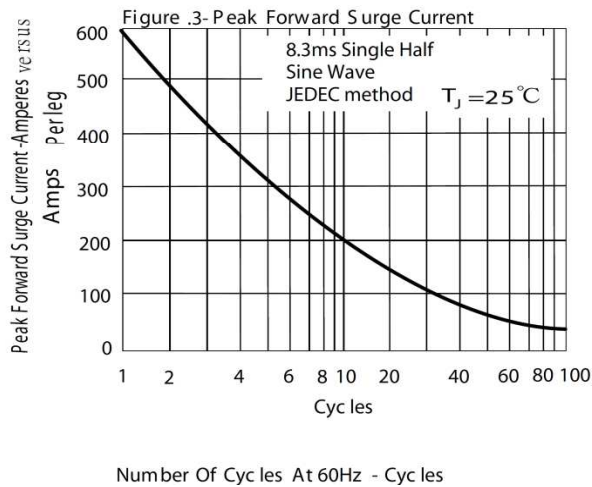


Figure .4- Typical Reverse Charac teristics

