

2GB DDR2 – SDRAM registered DIMM

240 Pin RDIMM

SEP02G72D1BH2MT-25R

2GB PC2-6400 in FBGA Technique

RoHS compliant

Options:


Frequency / Latency	Marking
DDR2 800MHZ CL6	-25
667 MHz CL5	-30
Module densities	
1024MB with 18 dies and 2 ranks	
Standard Grade (T _C)	0°C to 85°C
(T _A)	0°C to 70°C

Environmental Requirements:

- Operating temperature (T_C)
Standard Grade 0°C to 85°C
- Operating Humidity
10% to 90% relative humidity, noncondensing
- Operating Pressure
105 to 69 kPa (up to 10000 ft.)
- Storage Temperature
-55°C to 100°C
- Storage Humidity
5% to 95% relative humidity, noncondensing
- Storage Pressure
1682 PSI (up to 5000 ft.) at 50°C

Features:

- 240-pin 72-bit Dual-In-Line Double Data Rate synchronous DRAM Module for server applications
- DDR2 - SDRAM component base Micron MT47H128M8 die rev. H
- V_{DD} = 1.8V ±0.1V, V_{DDQ} 1.8V ±0.1V
- Auto Refresh (CBR) and Self Refresh 8k Refresh every 64ms
- 1.8V I/O (SSTL_18 compatible)
- Serial Presence Detect with EEPROM
- Four bit prefetch architecture
- Very Low Profile (VLP)
- Parity support
- DLL to align DQ and DQS transitions with CK
- Multiple internal device banks for concurrent operation
- Phase-lock loop (PLL) clock driver to reduce loading
- Supports ECC error detection and correction
- Programmable CAS latency (CL)
- Posted CAS additive latency (AL)
- WRITE latency = READ latency – 1 t_{CK}
- Programmable burst length: 4 or 8
- Adjustable data-output drive strength
- On-die termination (ODT)
- Gold-contact pad
- This module family is fully pin and functional compatible to JEDEC. (see www.jedec.org)
- The pcb and all components are manufactured according to the RoHS compliance specification [EU Directive 2002/95/EC Restriction of Hazardous Substances (RoHS)]

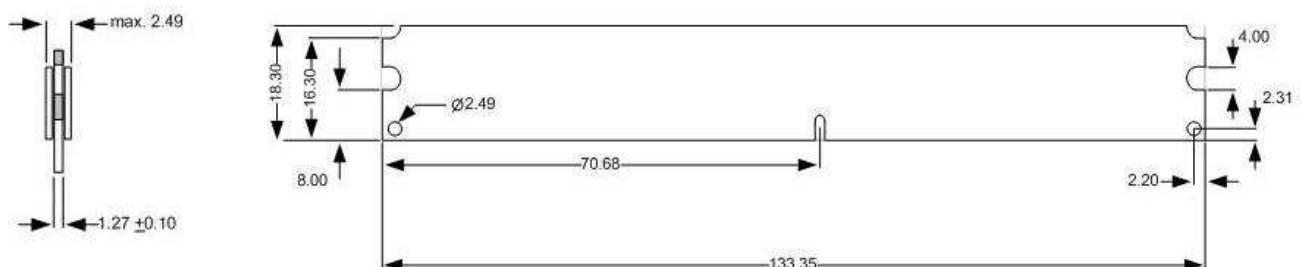

mechanical dimensions¹

¹if no tolerances specified ± 0.15mm

This Swissbit module is an industry standard 240-pin 8-byte DDR2 SDRAM Dual-In-line Memory Module (DIMM) which is organized as x72 high speed CMOS memory arrays. The module uses internally configured oct-bank DDR2 SDRAM devices. The module uses double data rate architecture to achieve high-speed operation. DDR2 SDRAM modules operate from a differential clock (CK and CK#). READ and WRITE accesses to a DDR2 SDRAM module is burst-oriented; accesses start at a selected location and continue for a programmed number of locations in a programmed sequence. The burst length is either four or eight locations. An auto precharge function can be enabled to provide a self-timed row precharge that is initiated at the end of a burst access. The DDR2 SDRAM devices have a multibank architecture which allows a concurrent operation that is providing a high effective bandwidth. A self refresh mode is provided and a power-saving "power-down" mode. All inputs and all full drive-strength outputs are SSTL_18 compatible.

The DDR2 SDRAM module uses the serial presence detect (SPD) function implemented via serial EEPROM using the standard I²C protocol. This nonvolatile storage device contains 256 bytes. The first 128 bytes are utilized by the DIMM manufacturer (swissbit) to identify the module type, the module's organization and several timing parameters. The second 128 bytes are available to the end user.

Module Configuration

Organization	DDR2 SDRAMs used	Row Addr.	Device Bank Select	Col. Addr.	Refresh	Module Bank Select
256M x 72bit	18 x 128M x 8bit (1Gbit)	14	BA0, BA1, BA2	10	8k	S0#, S1#

Module Dimensions in mm
133.33 (long) x 18.3(high) x 4 [max] (thickness)

Timing Parameters

Part Number	Module Density	Transfer Rate	Memory clock/Data bit rate	Latency
SEP02G72D1BH2MT-25R	2048 MB	6.4 GB/s	2.5ns/800MT/s	6400-666
SEP02G72D1BH2MT-30R	2048 MB	5.3 GB/s	3.0ns/667MT/s	5300-555

Pin Name

A0 - A13	Address Inputs
BA0, BA1	Bank Address Inputs
DQ0 – DQ63	Data Input / Output
DM0-DM8	Input Data Mask
RAS#	Row Address Strobe
CAS#	Column Address Strobe
WE#	Write Enable
CKE0 – CKE1	Clock Enable
CK0	Clock Input, positive line
CK0#	Clock Input, negative line
DQS0 – DQS17	Data Strobe, positive line
DQS0# - DQS17#	Data Strobe, negative line (only used when differential data strobe mode is enabled)
CS0#, CS1#	Chip Select


Reset#	Asynchronously forces all registered outputs LOW when RESET# is LOW. This signal can be used during power-up to ensure that CKE is LOW and DQs are High-Z.
PAR_IN	Parity bit for the address and control bus.
ERR_OUT	Parity error found on the address and control bus.
CB0 – CB7	Check Bits
V _{DD} / V _{DDQ}	Supply Voltage (1.8V± 0.1V)
V _{REF}	Input / Output Reference
V _{SS}	Ground
V _{DDSPD}	Serial EEPROM Positive Power Supply
SCL	Serial Clock for Presence Detect
SDA	Serial Data Out for Presence Detect
SA0 – SA1	Presence Detect Address Inputs
ODT0, ODT1	On-Die Termination
NC	No Connection

Pin Configuration

PIN #	Front Side	PIN #	Front Side	PIN #	Back Side	PIN #	Back Side
1	VREF	61	A4	121	Vss	181	VDDQ
2	Vss	62	VDDQ	122	DQ4	182	A3
3	DQ0	63	A2	123	DQ5	183	A1
4	DQ1	64	VDD	124	Vss	184	VDD
5	Vss	65	Vss	125	DM0 DQS9	185	CK0
6	DQS0#	66	Vss	126	NC DQS9#	186	CK0#
7	DQS0	67	VDD	127	Vss	187	VDD
8	Vss	68	NC PAR_IN	128	DQ6	188	A0
9	DQ2	69	VDD	129	DQ7	189	VDD
10	DQ3	70	A10	130	Vss	190	BA1
11	Vss	71	BA0	131	DQ12	191	VDDQ
12	DQ8	72	VDDQ	132	DQ13	192	RAS#
13	DQ9	73	WE#	133	Vss	193	CS0#
14	VSS	74	CAS#	134	DM1 DQS10	194	VDDQ
15	DQS1#	75	VDDQ	135	NC DQS10#	195	ODT0
16	DQS1	76	CS1#	136	Vss	196	A13
17	Vss	77	ODT1	137	NC	197	VDD
18	RESET#	78	VDDQ	138	NC	198	Vss
19	NC	79	Vss	139	Vss	199	DQ36
20	Vss	80	DQ32	140	DQ14	200	DQ37
21	DQ10	81	DQ33	141	DQ15	201	VSS
22	DQ11	82	Vss	142	Vss	202	DM4 DQS13
23	Vss	83	DQS4#	143	DQ20	203	NC DQS13#
24	DQ16	84	DQS4	144	DQ21	204	Vss
25	DQ17	85	Vss	145	Vss	205	DQ38
26	Vss	86	DQ34	146	DM2 DQS11	206	DQ39
27	DQS2#	87	DQ35	147	NC DQS11#	207	Vss
28	DQS2	88	Vss	148	Vss	208	DQ44
29	Vss	89	DQ40	149	DQ22	209	DQ45
30	DQ18	90	DQ41	150	DQ23	210	Vss

PIN #	Front Side	PIN #	Front Side	PIN #	Back Side	PIN #	Back Side
31	DQ19	91	Vss	151	Vss	211	DM5 DQS14
32	Vss	92	DQS5#	152	DQ28	212	NC DQS14#
33	DQ24	93	DQS5	153	DQ29	213	Vss
34	DQ25	94	Vss	154	Vss	214	DQ46
35	Vss	95	DQ42	155	DM3 DQS12	215	DQ47
36	DQS3#	96	DQ43	156	NC DQS12#	216	Vss
37	DQS3	97	Vss	157	Vss	217	DQ52
38	Vss	98	DQ48	158	DQ30	218	DQ53
39	DQ26	99	DQ49	159	DQ31	219	Vss
40	DQ27	100	Vss	160	Vss	220	NC
41	Vss	101	SA2	161	CB4	221	NC
42	CB0	102	NC	162	CB5	222	Vss
43	CB1	103	Vss	163	Vss	223	DM6 DQS15
44	Vss	104	DQS6#	164	DM8 DQS17	224	NC DQS15#
45	DQS8#	105	DQS6	165	NC DQS17#	225	Vss
46	DQS8	106	Vss	166	Vss	226	DQ54
47	Vss	107	DQ50	167	CB6	227	DQ55
48	CB2	108	DQ51	168	CB7	228	Vss
49	CB3	109	Vss	169	Vss	229	DQ60
50	Vss	110	DQ56	170	VDD	230	DQ61
51	VDD	111	DQ57	171	CKE1	231	Vss
52	CKE0	112	Vss	172	VDD	232	DM7 DQS16
53	VDD	113	DQS7#	173	NC	233	NC DQS16#
54	BA2	114	DQS7	174	NC	234	Vss
55	NC ERR_OUT	115	Vss	175	VDD	235	DQ62
56	VDDQ	116	DQ58	176	A12	236	DQ63
57	A11	117	DQ59	177	A9	237	Vss
58	A7	118	Vss	178	VDD	238	VDDSPD
59	VDD	119	SDA	179	A8	239	SA0
60	A5	120	SCL	180	A6	240	SA1

FUNCTIONAL BLOCK DIAGRAM 2048MB DDR2 ECC Registered DIMM, 2 RANKS AND 18 COMPONENTS

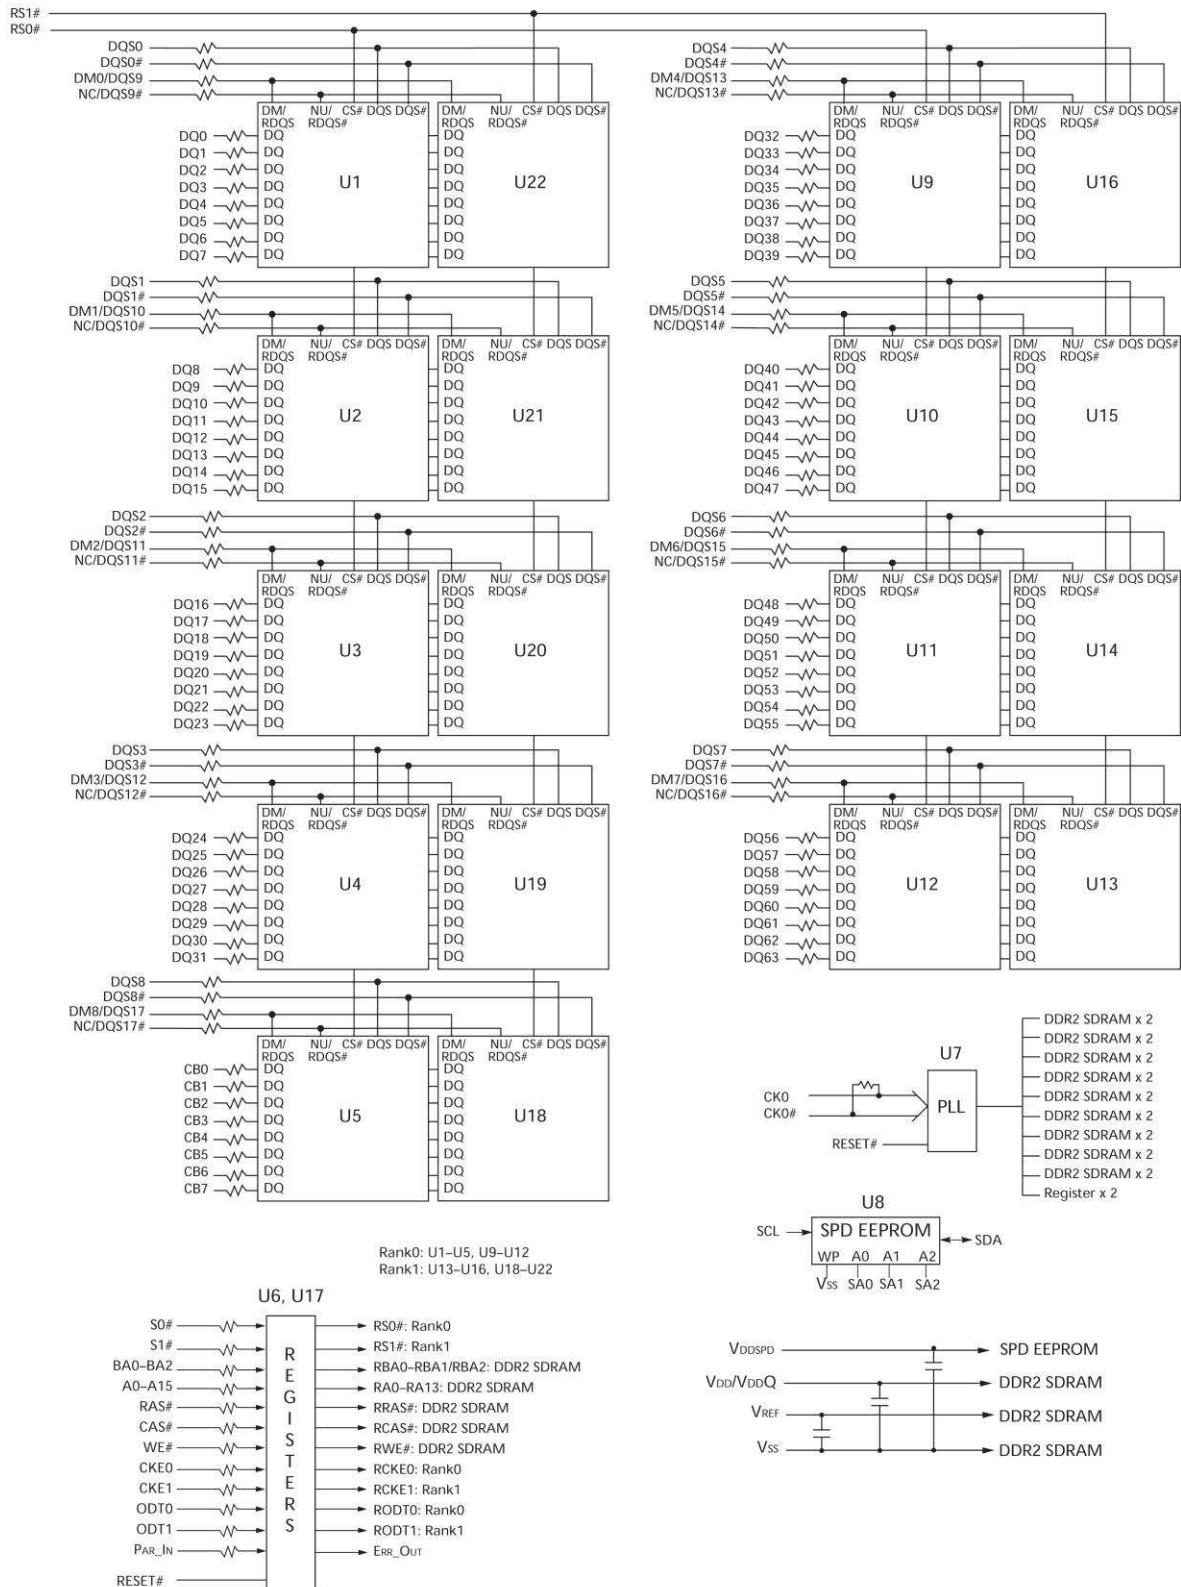

MAXIMUM ELECTRICAL DC CHARACTERISTICS

PARAMETER/ CONDITION	SYMBOL	MIN	MAX	UNITS
Supply Voltage	V_{DD}	-1.0	2.3	V
I/O Supply Voltage	V_{DDQ}	-0.5	2.3	V
V_{DDL} Supply Voltage	V_{DDL}	-0.5	2.3	V
Voltage on any pin relative to V_{SS}	V_{in}, V_{out}	-0.5	2.3	V
INPUT LEAKAGE CURRENT Any input $0V \leq V_{IN} \leq V_{DD}$, V_{REF} pin $0V \leq V_{IN} \leq 0.95V$ (All other pins not under test = 0V)	I_I			μA
Command/Address RAS#, CAS#, WE#, S#, CKE		-40	40	
CK, CK#		-20	20	
DM		-5	5	
OUTPUT LEAKAGE CURRENT (DQ's and ODT are disabled; $0V \leq V_{OUT} \leq V_{DDQ}$)	I_{OZ}	-5	5	μA
DQ, DQS, DQS#				
V_{REF} LEAKAGE CURRENT ; V_{REF} is on a valid level	I_{VREF}	-16	16	μA

DC OPERATING CONDITIONS

PARAMETER/ CONDITION	SYMBOL	MIN	NOM	MAX	UNITS
Supply Voltage	V_{DD}	1.7	1.8	1.9	V
I/O Supply Voltage	V_{DDQ}	1.7	1.8	1.9	V
V_{DDL} Supply Voltage	V_{DDL}	1.7	1.8	1.9	V
I/O Reference Voltage	V_{REF}	$0.49 \times V_{DDQ}$	$0.50 \times V_{DDQ}$	$0.51 \times V_{DDQ}$	V
I/O Termination Voltage (system)	V_{TT}	$V_{REF} - 0.04$	V_{REF}	$V_{REF} + 0.04$	V
Input High (Logic 1) Voltage	$V_{IH(DC)}$	$V_{REF} + 0.125$		$V_{DDQ} + 0.3$	V
Input Low (Logic 0) Voltage	$V_{IL(DC)}$	-0.3		$V_{REF} - 0.125$	V

AC INPUT OPERATING CONDITIONS

PARAMETER/ CONDITION	SYMBOL	MIN	MAX	UNITS
Input High (Logic 1) Voltage	$V_{IH(AC)}$	$V_{REF} + 0.25$	-	V
Input Low (Logic 0) Voltage	$V_{IL(AC)}$	-	$V_{REF} - 0.25$	V

CAPACITANCE

At DDR2 data rates, it is recommended to simulate the performance of the module to achieve optimum values. When inductance and delay parameters associated with trace lengths are used in simulations, they are significantly more accurate and realistic than a gross estimation of module capacitance. Simulations can then render a considerably more accurate result. JEDEC modules are now designed by using simulations to close timing budgets.

I_{DD} Specifications and Conditions

(0°C ≤ T_{CASE} ≤ + 85°C V_{DDQ} = +1.8V ± 0.1V, V_{DD} = +1.8V ± 0.1V)

Parameter & Test Condition		Symbol	max.		Unit
			6400-666	5300-555	
OPERATING CURRENT *) : One device bank Active-Precharge; t _{RC} = t _{RC} (I _{DD}); t _{CK} = t _{CK} (I _{DD}); CKE is HIGH, CS# is HIGH between valid commands; DQ inputs changing once per clock cycle; Address and control inputs changing once every two clock cycles		I _{DDO}	873	828	mA
OPERATING CURRENT*) : One device bank; Active-Read-Precharge; I _{OUT} = 0mA; BL = 4, CL = CL (I _{DD}), AL = 0; t _{CK} = t _{CK} (I _{DD}), t _{RC} = t _{RC} (I _{DD}), t _{RAS} = t _{RAS} MIN (I _{DD}), t _{RCD} = t _{RCD} (I _{DD}); CKE is HIGH, CS# is HIGH between valid commands; Address inputs changing once every two clock cycles; Data Pattern is same as I _{DD4W}		I _{DD1}	1053	963	mA
PRECHARGE POWER-DOWN CURRENT: All device banks idle; Power-down mode; t _{CK} = t _{CK} (I _{DD}); CKE is LOW; All Control and Address bus inputs are not changing; DQ's are floating at V _{REF}		I _{DD2P}	126	126	mA
PRECHARGE QUIET STANDBY CURRENT: All device banks idle; t _{CK} = t _{CK} (I _{DD}); CKE is HIGH, CS# is HIGH; All Control and Address bus inputs are not changing; DQ's are floating at V _{REF}		I _{DD2Q}	900	720	mA
PRECHARGE STANDBY CURRENT: All device banks idle; t _{CK} = t _{CK} (I _{DD}); CKE is HIGH, CS# is HIGH; All other Control and Address bus inputs are changing once every two clock cycles; DQ inputs changing once per clock cycle		I _{DD2N}	900	720	mA
ACTIVE POWER-DOWN CURRENT: All device banks open; t _{CK} = t _{CK} (I _{DD}); CKE is LOW; All Control and Address bus inputs are not changing; DQ's are floating at V _{REF}	Fast PDN Exit MR[12] = 0	I _{DD3P}	720	540	mA
	Slow PDN Exit MR[12] = 1		180	180	
ACTIVE STANDBY CURRENT: All device banks open; t _{CK} = t _{CK} (I _{DD}), t _{RAS} = t _{RAS} MAX (I _{DD}), t _{RP} = t _{RP} (I _{DD}); CKE is HIGH, CS# is HIGH between valid commands; All other Control and Address bus inputs are changing once every two clock cycles; DQ inputs changing once per clock cycle		I _{DD3N}	1080	990	mA
OPERATING READ CURRENT*) : All device banks open, Continuous burst reads; One module rank active; I _{OUT} = 0mA; BL = 4, CL = CL (I _{DD}), AL = 0; t _{CK} = t _{CK} (I _{DD}), t _{RAS} = t _{RAS} MAX (I _{DD}), t _{RP} = t _{RP} (I _{DD}); CKE is HIGH, CS# is HIGH between valid commands; Address bus inputs are changing once every two clock cycles; DQ inputs changing once per clock cycle		I _{DD4R}	1503	1278	mA

Parameter & Test Condition	Symbol	Max.		Unit
		6400-666	5300-555	
OPERATING WRITE CURRENT*) : All device banks open, Continuous burst writes; One module rank active; BL = 4, CL = CL (I _{DD}), AL = 0; t _{CK} = t _{CK} (I _{DD}), t _{RAS} = t _{RAS} MAX (I _{DD}), t _{RP} = t _{RP} (I _{DD}); CKE is HIGH, CS# is HIGH between valid commands; Address bus inputs are changing once every two clock cycles; DQ inputs changing once per clock cycle	I _{DD4W}	1503	1278	mA
BURST REFRESH CURRENT: t _{CK} = t _{CK} (I _{DD}); refresh command at every t _{RFC} (I _{DD}) interval, CKE is HIGH, CS# is HIGH between valid commands; All other Control and Address bus inputs are changing once every two clock cycles; DQ inputs changing once per clock cycle	I _{DD5}	4230	3870	mA
SELF REFRESH CURRENT: CK and CK# at 0V; CKE ≤ 0.2V; All other Control and Address bus inputs are floating at V _{REF} ; DQ's are floating at V _{REF}	I _{DD6}	126	126	mA
OPERATING CURRENT*) : Four device bank interleaving READs, I _{OUT} = 0mA; BL = 4, CL = CL (I _{DD}), AL = t _{RCD} (I _{DD}) - 1 x t _{CK} (I _{DD}); t _{CK} = t _{CK} (I _{DD}), t _{RC} = t _{RC} (I _{DD}), t _{RRD} = t _{RRD} (I _{DD}), t _{RCD} = t _{RCD} (I _{DD}); CKE is HIGH, CS# is HIGH between valid commands; Address bus inputs are not changing during DESELECT; DQ inputs changing once per clock cycle	I _{DD7}	3078	2583	mA

*) Value calculated as one module rank in this operating condition, and all other module ranks in IDD2P (CKE LOW) mode.

TIMING VALUES USED FOR I_{DD} MEASUREMENT

I _{DD} MEASUREMENT CONDITIONS				
SYMBOL	6400-555	6400-666	5300-555	Unit
CL (I _{DD})	5	6	5	t _{CK}
t _{RCD} (I _{DD})	12.5	15	15	ns
t _{RC} (I _{DD})	57.5	60	60	ns
t _{RRD} (I _{DD})	7.5	7.5	7.5	ns
t _{CK} (I _{DD})	2.5	2.5	3.0	ns
t _{RAS} MIN (I _{DD})	45	45	45	ns
t _{RAS} MAX (I _{DD})	70,000	70,000	70,000	ns
t _{RP} (I _{DD})	12.5	15	15	ns
t _{RFC} (I _{DD})	105	105	105	ns

DDR2 SDRAM COMPONENT ELECTRICAL CHARACTERISTICS AND RECOMMENDED AC OPERATING CONDITIONS

(0°C ≤ T_{CASE} ≤ + 85°C; V_{DDQ} = +1.8V ± 0.1V, V_{DD} = +1.8V ± 0.1V)

AC CHARACTERISTICS			6400-666		5300-555		Unit
PARAMETER		SYMBOL	MIN	MAX	MIN	MAX	
Clock cycle time	CL = 6	t _{CK} (6)	2.5	8.0			
	CL = 5	t _{CK} (5)	3.0-	8.0-	3.0	8.0	ps
	CL = 4	t _{CK} (4)	3.75	8.0	3.75	8.0	ps
	CL = 3	t _{CK} (3)	-	-	5.0	8.0	ps
CK high-level width		t _{CH}	0.48	0.52	0.48	0.52	t _{CK}
CK low-level width		t _{CL}	0.48	0.52	0.48	0.52	t _{CK}
Half clock period		t _{HP}	min (t _{CH} , t _{CL})		min (t _{CH} , t _{CL})		ps
Access window (output) of DQ _s from CK/CK#		t _{AC}	-0.40	+0.40	-0.45	+0.45	ns
Data-out high-impedance window from CK/CK#		t _{HZ}		t _{AC} max		+0.45 (= t _{AC} max)	ns
Data-out low-impedance window from CK/CK#		t _{LZ}	t _{AC} min	t _{AC} max	-0.45 (= t _{AC} min)	+0.45 (= t _{AC} max)	ns
DQ and DM input setup time relative to DQS		t _{DS}	0.05		0.10		ns
DQ and DM input hold time relative to DQS		t _{DH}	0.125		0.175		ns
DQ and DM input pulse width (for each input)		t _{DIPW}	0.35		0.35		t _{CK}
Data hold skew factor		t _{QHS}		0.3		0.34	ns
DQ-DQS hold, DQS to first DQ to go non-valid, per access		t _{QH}	t _{HP} - t _{QHS}		t _{HP} - t _{QHS}		ns
Data valid output window		t _{DVW}	t _{QH} - t _{DQSQ}		t _{QH} - t _{DQSQ}		ns
DQS input high pulse width		t _{DQSH}	0.35		0.35		t _{CK}
DQS input low pulse width		t _{DQSL}	0.35		0.35		t _{CK}
DQS falling edge to CK rising - setup time		t _{DSS}	0.2		0.2		t _{CK}
DQS falling edge from CK rising - hold time		t _{DSH}	0.2		0.2		t _{CK}
DQS -DQ skew, DQS to last DQ valid, per group, per access		t _{DQSQ}		0.2		0.24	ns
DQS read preamble		t _{RPRE}	0.9	1.1	0.9	1.1	t _{CK}
DQS read postamble		t _{RPST}	0.4	0.6	0.4	0.6	t _{CK}
DQS write preamble		t _{WPRE}	0.35		0.35		t _{CK}
DQS write preamble setup time		t _{WPRES}	0		0		ns
DQS write postamble		t _{WPST}	0.4	0.6	0.4	0.6	t _{CK}
Positive DQS latching edge to associated clock edge		t _{DQSS}	- 0.25	+ 0.25	- 0.25	+ 0.25	t _{CK}
Write command to first DQS latching transition			WL- t _{DQSS}	WL+ t _{DQSS}	WL- t _{DQSS}	WL+ t _{DQSS}	t _{CK}
Address and control input pulse width (for each input)		t _{IPW}	0.6		0.6		t _{CK}
Address and control input setup time		t _{IS}	0.175		0.2		ns

DDR2 SDRAM COMPONENT ELECTRICAL CHARACTERISTICS AND RECOMMENDED AC OPERATING CONDITIONS (Continued)

(0°C ≤ T_{CASE} ≤ + 85°C; V_{DDQ} = +1.8V ± 0.1V, V_{DD} = +1.8V ± 0.1V)

AC CHARACTERISTICS		6400-666		5300-555		Unit
PARAMETER	SYMBOL	MIN	MAX	MIN	MAX	
Address and control input hold time	t _{IH}	0.25		0.275		ns
CAS# to CAS# command delay	t _{CCD}	2		2		t _{CK}
ACTIVE to ACTIVE (same bank) command period	t _{RC}	60		60		ns
ACTIVE bank a to ACTIVE bank b command	t _{RRD}	7.5		7.5		ns
ACTIVE to READ or WRITE delay	t _{RCD}	15		15		ns
Four bank Activate period	t _{FAW}	37.5		37.5		ns
ACTIVE to PRECHARGE command	t _{RAS}	45	70,000	45	70,000	ns
Internal READ to precharge command delay	t _{RTP}	7.5		7.5		ns
Write recovery time	t _{WR}	15		15		ns
Auto precharge write recovery + precharge time	t _{DAL}	t _{WR} + t _{RP}		t _{WR} + t _{RP}		ns
Internal WRITE to READ command delay	t _{WTR}	7.5		7.5		ns
PRECHARGE command period	t _{RP}	15		15		ns
PRECHARGE ALL command period	t _{RPA}	t _{RP} + t _{CK}		t _{RP} + t _{CK}		ns
LOAD MODE command cycle time	t _{MRD}	2		2		t _{CK}
CKE low to CK, CK# uncertainty	t _{DELAY}	t _{IS} + t _{CK} + t _{IH}		t _{IS} + t _{CK} + t _{IH}		t _{CK}
REFRESH to ACTIVE or REFRESH to REFRESH command interval	t _{RFC}	105	70,000	105	70,000	ns
Average periodic refresh interval	t _{REFI}		7.8		7.8	μs
Exit SELF REFRESH to non-READ command	t _{XSNR}	t _{RFC} (min) + 10		t _{RFC} (min) + 10		ns
Exit SELF REFRESH to READ command	t _{XSRD}	200		200		t _{CK}
Exit SELF REFRESH timing reference	t _{ISXR}	t _{IS}		t _{IS}		ps
ODT turn-on delay	t _{AOND}	2	2	2	2	t _{CK}
ODT turn-on	t _{AON}	t _{AC} (min)	t _{AC} (max) + 1,000	t _{AC} (min)	t _{AC} (max) + 1,000	ps
ODT turn-off delay	t _{AOFD}	2.5	2.5	2.5	2.5	t _{CK}
ODT turn-off	t _{AOF}	t _{AC} (min)	t _{AC} (max) + 600	t _{AC} (min)	t _{AC} (max) + 600	ps
ODT turn-on (power-down mode)	t _{AONPD}	t _{AC} (min) + 2,000	2 x t _{CK} + t _{AC} (max) + 1,000	t _{AC} (min) + 2,000	2 x t _{CK} + t _{AC} (max) + 1,000	ps
ODT turn-off (power-down mode)	t _{AOFPD}	t _{AC} (min) + 2,000	2.5 x t _{CK} + t _{AC} (max) + 1,000	t _{AC} (min) + 2,000	2.5 x t _{CK} + t _{AC} (max) + 1,000	ps
ODT to power-down entry latency	t _{ANPD}	3		3		t _{CK}

DDR2 SDRAM COMPONENT ELECTRICAL CHARACTERISTICS AND RECOMMENDED AC OPERATING CONDITIONS (Continued)

(0°C ≤ T_{CASE} ≤ + 85°C; V_{DDQ} = +1.8V ± 0.1V, V_{DD} = +1.8V ± 0.1V)

AC CHARACTERISTICS		6400-666		5300-555		Unit
PARAMETER	SYMBOL	MIN	MAX	MIN	MAX	
ODT power-down exit latency	t _{AXPD}	8		8		t _{CK}
ODT enable from MRS command	T _{MOD}	12		12		ns
Exit active power-down to READ command, MR [bit 12 = 0]	t _{XARD}	2		2		t _{CK}
Exit active power-down to READ command, MR [bit 12 = 1]	t _{XARDS}	8 - AL		7 - AL		t _{CK}
Exit precharge power-down to any non-READ command	t _{XP}	2		2		t _{CK}
CKE minimum high/low time	t _{CKE}	3		3		t _{CK}

Register Specifications

Parameter	Symbol	Pins	Conditions	Min	Max	Units
DC high-level input voltage	V _{IH(DC)}	Address, control, command	SSTL_18	V _{REF(DC)} + 125	V _{DDQ} + 250	mV
DC low-level input voltage	V _{IL(DC)}	Address, control, command	SSTL_18	0	V _{REF(DC)} - 125	mV
AC high-level input voltage	V _{IH(AC)}	Address, control, command	SSTL_18	V _{REF(DC)} + 250	V _{DD}	mV
AC low-level input voltage	V _{IL(AC)}	Address, control, command	SSTL_18	0	V _{REF(DC)} - 250	mV
Output high voltage	V _{OH}	Parity output	LVC MOS	1.2	-	V
Output low voltage	V _{OL}	Parity output	LVC MOS	-	0.5	V
Input current	I _I	All pins	V _I = V _{DDQ} or V _{SSQ}	-5	+5	μA
Static standby	I _{DD}	All pins	RESET# = V _{SSQ} (I _O = 0)	-	100	μA
Static operating	I _{DD}	All pins	RESET# = V _{SSQ} ; V _I = V _{IH(AC)} or V _{IL(DC)} I _O = 0	-	40	mA
Dynamic operating (clock tree)	I _{DDD}	n/a	RESET# = V _{DD} , V _I = V _{IH(AC)} or V _{IL(AC)} , I _O = 0; CK and CK# switching 50% duty cycle	-	Varies by manufacturer	μA
Dynamic operating (per each input)	I _{DDD}	n/a	RESET# = V _{DD} , V _I = V _{IH(AC)} or V _{IL(AC)} , I _O = 0; CK and CK# switching 50% duty cycle; One data input switching at t _{CK} /2, 50% duty cycle	-	Varies by manufacturer	μA
Input capacitance (per device, per pin)	C _I	Data	V _I = V _{REF} ± 250mV; V _{DDQ} = 1.8V	2.5	3.5	pF
Input capacitance (per device, per pin)	C _I	RESET#	V _I = V _{DDQ} or V _{SSQ}	-	Varies by manufacturer	pF

Notes: 1. Timing and switching specifications for the register listed above are critical for proper operation of the DDR2 SDRAM registered DIMMs. These are meant to be a subset of the parameters for the specific device used on the module. Detailed information for this register is available in JEDEC standard JESD82.


SERIAL PRESENCE-DETECT MATRIX

BYTE	DESCRIPTION	6400-666	5300-555
0	NUMBER OF SPD BYTES USED	0x80	
1	TOTAL NUMBER OF BYTES IN SPD DEVICE	0x08	
2	FUNDAMENTAL MEMORY TYPE	0x08	
3	NUMBER OF ROW ADDRESSES ON ASSEMBLY	0x0E	
4	NUMBER OF COLUMN ADDRESSES ON ASSEMBLY	0x0A	
5	DIMM HIGHT AND MODULE RANKS	0x61	
6	MODULE DATA WIDTH	0x48	
7	MODULE DATA WIDTH (continued)	0x00	
8	MODULE VOLTAGE INTERFACE LEVELS (V_{DDQ})	0x05	
9	SDRAM CYCLE TIME, (t_{CK}) [max CL] CAS LATENCY = 5 (5300), CL = 4 (4200)	0x25	0x30
10	SDRAM ACCESS FROM CLOCK, (t_{AC}) [max CL] CAS LATENCY = 5 (5300); CL = 4 (4200)	0x40	0x45
11	MODULE ERROR CORRECTION CONFIGURATION TYPE	0x06	
12	REFRESH RATE / TYPE	0x82	
13	SDRAM DEVICE WIDTH (PRIMARY SDRAM)	0x08	
14	ERROR- CHECKING SDRAM DATA WIDTH	0x08	
15	MINIMUM CLOCK DELAY, BACK-TO-BACK RANDOM COLUMN ACCESS	0x00	
16	BURST LENGTHS SUPPORTED	0x0C	
17	NUMBER OF BANKS ON SDRAM DEVICE	0x08	
18	CAS LATENCIES SUPPORTED	0x70	0x38
19	MODULE THICKNESS	0x01	
20	DDR2 DIMM TYPE	0x01	
21	SDRAM MODULE ATTRIBUTES	0x05	
22	SDRAM DEVICE ATTRIBUTES: Weak Driver and 50Ω ODT	0x03	
23	SDRAM CYCLE TIME, (t_{CK}) [max CL – 1] CAS LATENCY = 4 (5300), CL = 3 (4200)	0x30	0x3D
24	SDRAM ACCESS FROM CK, (t_{AC}) [max CL – 1] CAS LATENCY = 4 (5300), CL = 3 (4200)	0x40	0x45
25	SDRAM CYCLE TIME, (t_{CK}) [max CL – 2] CAS LATENCY = 3 (5300)	0x3D	0x50
26	SDRAM ACCESS FROM CK, (t_{AC}) [max CL – 2] CAS LATENCY = 3 (5300)	0x40	0x45
27	MINIMUM ROW PRECHARGE TIME, (t_{RP})	0x3C	
28	MINIMUM ROW ACTIVE TO ROW ACTIVE, (t_{RRD})	0x1E	
29	MINIMUM RAS# TO CAS# DELAY, (t_{RCD})	0x3C	
30	MINIMUM RAS# PULSE WIDTH, (t_{RAS})	0x2D	
31	MODULE BANK DENSITY	0x01	

SERIAL PRESENCE-DETECT MATRIX (continued)

BYTE	DESCRIPTION	6400-666	5300-555
32	ADDRESS AND COMMAND SETUP TIME, (t_{ISb})	0x17	0x20
33	ADDRESS AND COMMAND HOLD TIME, (t_{IHb})	0x25	0x27
34	DATA / DATA MASK INPUT SETUP TIME, (t_{DSb})	0x05	0x10
35	DATA / DATA MASK INPUT HOLD TIME, (t_{DHb})	0x12	0x17
36	WRITE RECOVERY TIME, (t_{WR})	0x3C	
37	WRITE to READ Command Delay, (t_{WTR})	0x1E	
38	READ to PRECHARGE Command Delay, (t_{RTP})	0x1E	
39	Mem Analysis Probe	0x00	
40	Extension for Bytes 41 and 42	0x06	
41	MIN ACTIVE AUTO REFRESH TIME, (t_{RC})	0x3C	
42	MINIMUM AUTO REFRESH TO ACTIVE / AUTO REFRESH COMMAND PERIOD, (t_{RFC})	0x7F	
43	SDRAM DEVICE MAX CYCLE TIME, (t_{CKMAX})	0x80	
44	SDRAM DEVICE MAX DQS-DQ SKEW TIME, (t_{DQSQ})	0x14	0x18
45	SDRAM DEVICE MAX READ DATA HOLD SKEW FACTOR, (t_{QHS})	0x1E	0x22
46	PLL Relock Time	0x0F	
47-61	Optional Features, not supported	0x00	
62	SPD REVISION	0x13	
63	CHECKSUM FOR BYTES 0-62	0xF2	0x17
64-67	MANUFACTURER'S JEDEC ID CODE	0x7F7F7FDA	
68-71	MANUFACTURER'S JEDEC ID CODE (continued)	0x00	
72	MANUFACTURING LOCATION	x	
73-90	MODULE PART NUMBER (ASCII)	"SEP02G72D1BH2MT-xx"	
91	PCB IDENTIFICATION CODE	0x00	
92	IDENTIFICATION CODE (continued)	0x00	
93	YEAR OF MANUFACTURE IN BCD	x	
94	WEEK OF MANUFACTURE IN BCD	x	
95-98	MODULE SERIAL NUMBER	x	
99-127	MANUFACTURER-SPECIFIC DATA (RSVD)	0x00	
128-255	Open for customer use	0xff	

Part Number Code

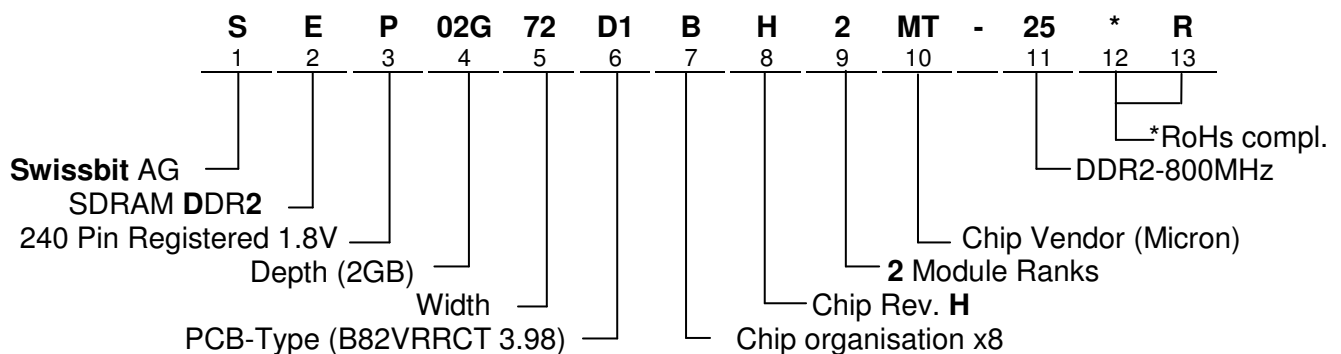

* optional / additional information

Locations
Swissbit AG

Industriestrasse 4 – 8
CH – 9552 Bronschhofen
Switzerland
Phone: +41 (0)71 913 03 03
Fax: +41 (0)71 913 03 15

Swissbit Germany GmbH

Wolfener Strasse 36
D – 12681 Berlin
Germany
Phone: +49 (0)30 93 69 54 – 0
Fax: +49 (0)30 93 69 54 – 55

Swissbit NA, Inc.

14 Willett Avenue, Suite 301A
Port Chester, NY 10573
USA
Phone: +1 914 935 1400
Fax: +1 914 935 9865

Swissbit NA, Inc.

3913 Todd Lane, Suite – 307
Austin, TX 78744
USA
Phone: +1 512 302 9001
Fax: +1 512 302 4808

Swissbit Japan, Inc.

3F Core Koenji,
2-1-24 Koenji-Kita, Suginami-Ku,
Tokyo 166-0002
Japan
Phone: +81 3 5356 3511
Fax: +81 3 5356 3512