

1024MB DDR3 – SDRAM UDIMM

240 Pin UDIMM

SGU01G64A1BG1MT-xxR

1GByte in FBGA Technology

RoHS compliant

Options:

- Data Rate / Latency Marking
DDR3 1066 MT/s CL7 -BB
DDR3 1333 MT/s CL9 -CC

- Module Density
1024MB with 8 dies and 1 rank

- Standard Grade (T_A) 0°C to 70°C
(T_C) 0°C to 85°C


Environmental Requirements:

- Operating temperature (ambient)
Standard Grade 0°C to 70°C
- Operating Humidity
10% to 90% relative humidity, noncondensing
- Operating Pressure
105 to 69 kPa (up to 10000 ft.)
- Storage Temperature
-55°C to 100°C
- Storage Humidity
5% to 95% relative humidity, noncondensing
- Storage Pressure
1682 PSI (up to 5000 ft.) at 50°C

Features:

- 240-pin 64-bit DDR3 unbuffered Dual-In-Line Double Data Rate Synchronous DRAM module
 - Module organization: single rank 128M x 64
 - $V_{DD} = 1.5V \pm 0.075V$, $V_{DDQ} = 1.5V \pm 0.075V$
 - 1.5V I/O (SSTL_15 compatible)
 - Fly-by-bus with termination for C/A & CLK bus
 - On-board I2C temperature sensor with integrated serial presence-detect (SPD) EEPROM
 - Gold-contact pads
 - This module is fully pin and functional compatible to the JEDEC PC3-10600 spec. and JEDEC- Standard MO-268. (see www.jedec.org)
 - The pcb and all components are manufactured according to the RoHS compliance specification [EU Directive 2002/95/EC Restriction of Hazardous Substances (RoHS)]
-
- **DDR3 - SDRAM component Micron**
MT41J128M8JP-15E DIE-Rev.G
 - 128Mx8 DDR3 SDRAM in PG-TFBGA-78 package
 - 8-bit prefetch architecture
 - Programmable CAS Latency, CAS Write Latency, Additive Latency, Burst Length and Burst Type.
 - On-Die-Termination (ODT) and Dynamic ODT for improved signal integrity.
 - Refresh. Self Refresh and Power Down Modes.
 - ZQ Calibration for output driver and ODT.
 - System Level Timing Calibration Support via Write Leveling and Multi Purpose Register (MPR) Read Pattern.

Figure: mechanical dimensions¹

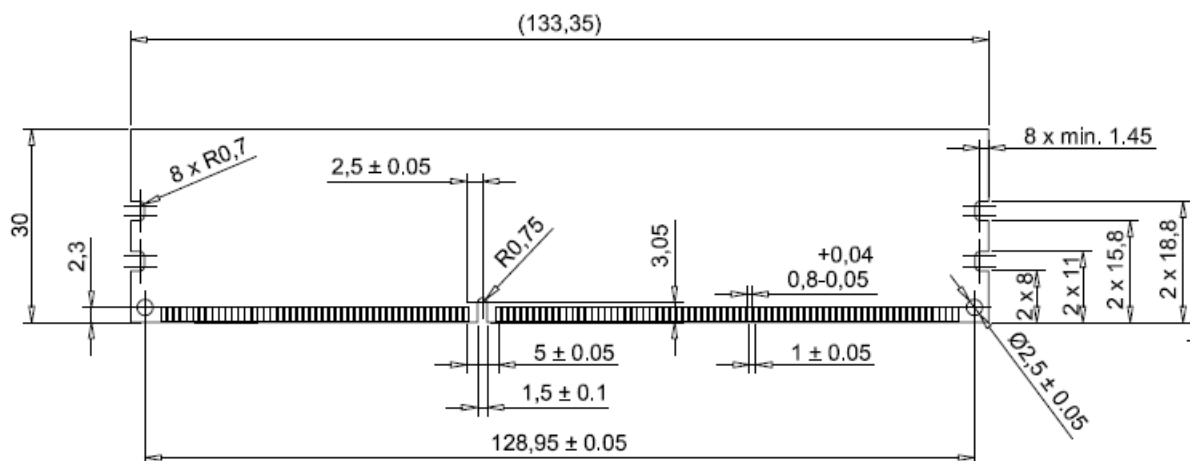

¹if no tolerances specified $\pm 0.15\text{mm}$

This Swissbit module is an industry standard 240-pin 8-byte DDR3 SDRAM Dual-In-line Memory Module (UDIMM) which is organized as x64 high speed CMOS memory arrays. The module uses internally configured octal-bank DDR3 SDRAM devices. The module uses double data rate architecture to achieve high-speed operation. DDR3 SDRAM modules operate from a differential clock (CK and CK#). READ and WRITE accesses to a DDR3 SDRAM module is burst-oriented; accesses start at a selected location and continue for a programmed number of locations in a programmed sequence. The burst length is either four or eight locations. An auto precharge function can be enabled to provide a self-timed row precharge that is initiated at the end of a burst access. The DDR3 SDRAM devices have a multibank architecture which allows a concurrent operation that is providing a high effective bandwidth. A self refresh mode is provided and a power-saving "power-down" mode. All inputs and all full drive-strength outputs are SSTL_15 compatible.

The DDR3 SDRAM module uses the serial presence detect (SPD) function implemented via serial EEPROM using the standard I²C protocol. This nonvolatile storage device contains 256 bytes. The first 128 bytes are utilized by the DIMM manufacturer (Swissbit) to identify the module type, the module's organization and several timing parameters. The second 128 bytes are available to the end user.

Module Configuration

Organization	DDR3 SDRAMs used	Row Addr.	Device Bank Addr.	Col. Addr.	Refresh	Module Bank Select
128M x 64bit	8 x 128M x 8bit (1024Mbit)	14	BA0, BA1, BA2	10	8k	S0#

Module Dimensions

in mm

133.35 (long) x 30(high) x 2.70[max] (thickness)

Timing Parameters

Part Number	Module Density	Transfer Rate	Clock Cycle/Data bit rate	Latency
SGU01G64A1BG1MT-BBR	1024 MB	8.5 GB/s	1.87ns/1066MT/s	7-7-7
SGU01G64A1BG1MT-CCR	1024 MB	10.6 GB/s	1.5ns/1333MT/s	9-9-9

Pin Name

A0-9, A11 – A13	Address Inputs
A10/AP	Address Input / Autoprecharge Bit
BA0, BA1	Bank Address Inputs
DQ0 – DQ63	Data Input / Output
DM0-DM7	Input Data Mask
RAS#	Row Address Strobe
CAS#	Column Address Strobe
WE#	Write Enable
CKE0	Clock Enable
CK0	Clock Inputs, positive line
CK0#	Clock Inputs, negative line
DQS0 - DQS7	Data Strobe, positive line
DQS0# - DQS7#	Data Strobe, negative line (only used when differential data strobe mode is enabled)
S0#	Chip Select
Event#	Temperature event: The EVENT# pin is asserted by the temperature sensor when critical

V _{DD}	Supply Voltage (1.5V± 0.075V)
V _{REFDQ}	Reference voltage: DQ, DM (V _{DD} /2)
V _{REFCA}	Reference voltage: Control, command, and address (V _{DD} /2)
V _{SS}	Ground
V _{TT}	Termination voltage: Used for control, command, and address (V _{DD} /2).
V _{DDSPD}	Serial EEPROM Positive Power Supply
SCL	Serial Clock for Presence Detect
SDA	Serial Data Out for Presence Detect
SA0 – SA1	Presence Detect Address Inputs
ODT0	On-Die Termination
NC	No Connection

Pin Configuration


Frontside									
PIN	Symbol	PIN	Symbol	PIN	Symbol	PIN	Symbol	PIN	Symbol
1	V _{REFDQ}	27	DQ18	49	NC	75	V _{DD}	101	V _{SS}
2	V _{SS}	28	DQ19	50	CKE0	76	NC(S1#)	102	DQS6#
3	DQ0	29	V _{SS}	51	V _{DD}	77	NC(RSVD/ODT1)	103	DQS6
4	DQ1	30	DQ24	52	BA2	78	V _{DD}	104	V _{SS}
5	V _{SS}	31	DQ25	53	NC(Err_Out#)	79	NC(S2#)	105	DQ50
6	DQS0#	32	V _{SS}	54	V _{DD}	80	V _{SS}	106	DQ51
7	DQS0	33	DQS3#	55	A11	81	DQ32	107	V _{SS}
8	V _{SS}	34	DQS3	56	A7	82	DQ33	108	DQ56
9	DQ2	35	V _{SS}	57	V _{DD}	83	V _{SS}	109	DQ57
10	DQ3	36	DQ26	58	A5	84	DQS4#	110	V _{SS}
11	V _{SS}	37	DQ27	59	A4	85	DQS4	111	DQS7#
12	DQ8	38	V _{SS}	60	V _{DD}	86	V _{SS}	112	DQS7
13	DQ9	39	CB0	61	A2	87	DQ34	113	V _{SS}
14	V _{SS}	40	CB1	62	V _{DD}	88	DQ35	114	DQ58
15	DQS1#	41	V _{SS}	63	CK1	89	V _{SS}	115	DQ59
16	DQS1	42	DQS8#	64	CK1#	90	DQ40	116	V _{SS}
17	V _{SS}	43	DQS8	65	V _{DD}	91	DQ41	117	SA0
18	DQ10	44	V _{SS}	66	V _{DD}	92	V _{SS}	118	SCL
19	DQ11	45	CB2	67	V _{REFCA}	93	DQS5#	119	SA2
20	V _{SS}	46	CB3	68	NC(Par_In)	94	DQS5	120	V _{TT}
21	DQ16	47	V _{SS}	69	V _{DD}	95	V _{SS}		
22	DQ17	48	NC	70	A10/ AP	96	DQ42		
23	V _{SS}			71	BA0	97	DQ43		
24	DQS2#			72	V _{DD}	98	V _{SS}		
25	DQS2			73	WE#	99	DQ48		
26	V _{SS}			74	CAS#	100	DQ49		

Signals in brackets (...) may be connected at the DIMM socket, but are not used on the DIMM


Backside									
PIN	Symbol	PIN	Symbol	PIN	Symbol	PIN	Symbol	PIN	Symbol
121	V _{SS}	147	DQ23	169	NC(CKE1)	195	ODT0	221	DM6/DQS15
122	DQ4	148	V _{SS}	170	V _{DD}	196	A13	222	NC(DQS15#)
123	DQ5	149	DQ28	171	NC(A15)	197	V _{DD}	223	V _{SS}
124	V _{SS}	150	DQ29	172	NC(A14)	198	NC(S3#)	224	DQ54
125	DM0/DQS9	151	V _{SS}	173	V _{DD}	199	V _{SS}	225	DQ55
126	NC(DQS9#)	152	DM3/DQS12	174	A12/BC#	200	DQ36	226	V _{SS}
127	V _{SS}	153	NC(DQS12#)	175	A9	201	DQ37	227	DQ60
128	DQ6	154	V _{SS}	176	V _{DD}	202	V _{SS}	228	DQ61
129	DQ7	155	DQ30	177	A8	203	DM4/DQS13	229	V _{SS}
130	V _{SS}	156	DQ31	178	A6	204	NC(DQS13#)	230	DM7/DQS16
131	DQ12	157	V _{SS}	179	V _{DD}	205	V _{SS}	231	NC(DQS16#)
132	DQ13	158	CB4	180	A3	206	DQ38	232	V _{SS}
133	V _{SS}	159	CB5	181	A1	207	DQ39	233	DQ62
134	DM1/DQS10	160	V _{SS}	182	V _{DD}	208	V _{SS}	234	DQ63
135	NC(DQS10#)	161	DM8/DQS17	183	V _{DD}	209	DQ44	235	V _{SS}
136	V _{SS}	162	NC(DQS17#)	184	CK0	210	DQ45	236	V _{DDSPD}
137	DQ14	163	V _{SS}	185	CK0#	211	V _{SS}	237	SA1
138	DQ15	164	CB6	186	V _{DD}	212	DM5/DQS14	238	SDA
139	V _{SS}	165	CB7	187	NC(EVENT#)	213	NC(DQS14#)	239	V _{SS}
140	DQ20	166	V _{SS}	188	A0	214	V _{SS}	240	V _{TT}
141	DQ21	167	NC(TEST)	189	V _{DD}	215	DQ46		
142	V _{SS}	168	NC(RESET#)	190	BA1	216	DQ47		
143	DM2/DQS11			191	V _{DD}	217	V _{SS}		
144	NC(DQS11#)			192	RAS#	218	DQ52		
145	V _{SS}			193	S0#	219	DQ53		
146	DQ22			194	V _{DD}	220	V _{SS}		

Signals in brackets (...) may be connected at the DIMM socket, but are not used on the DIMM

**FUNCTIONAL BLOCK DIAGRAM 1024MB DDR3 SDRAM UDIMM,
1 RANK AND 8 COMPONENTS**

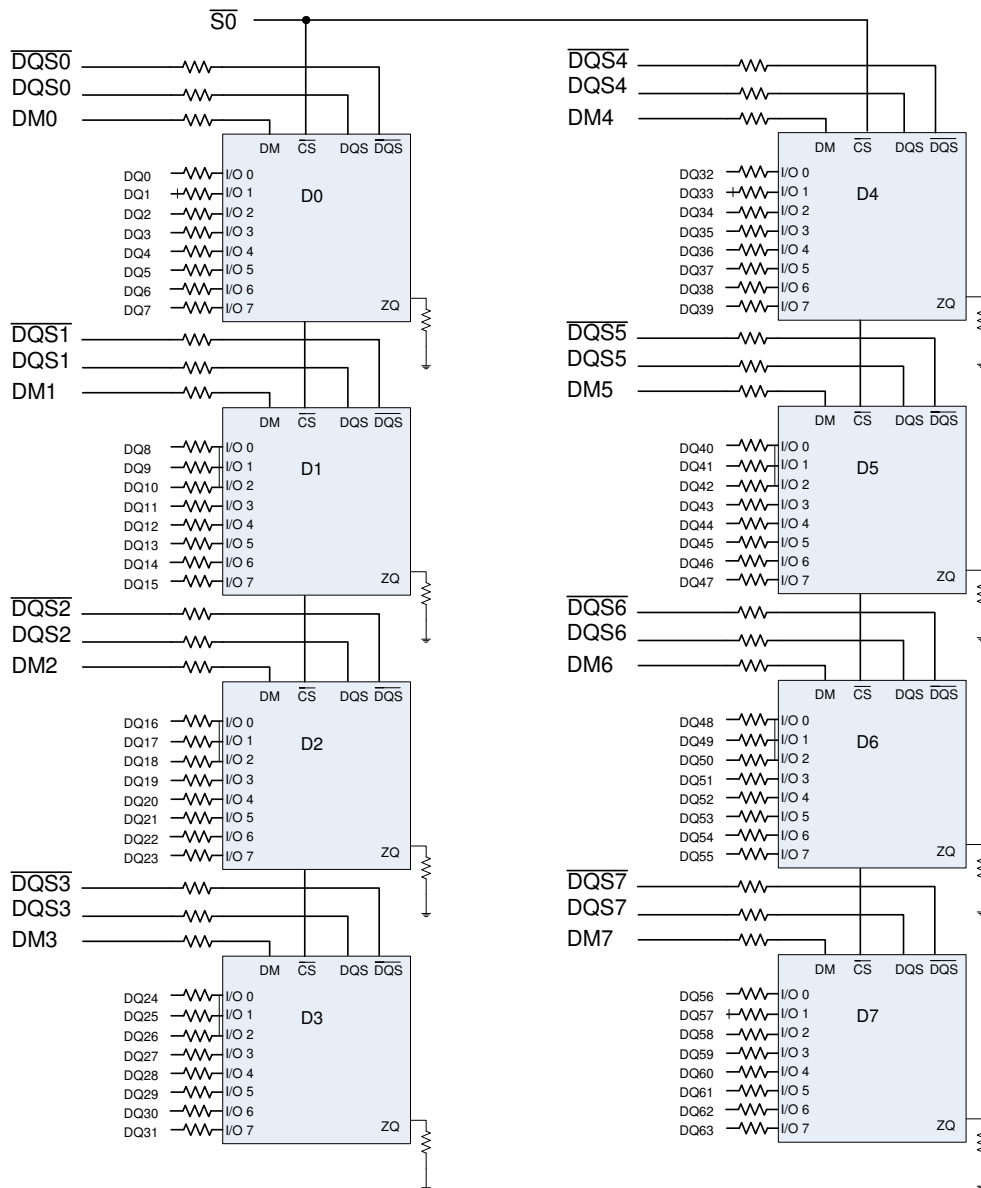

BA0-BA2 → BA0-BA2: SDRAM D0-D7
A0-A13 → A0-A13: SDRAM D0-D7
RAS → RAS: SDRAM D0-D7
CAS → CAS: SDRAM D0-D7
WE → WE: SDRAM D0-D7
ODT0 → ODT: SDRAM D0-D7
CKE0 → CKE: SDRAM D0-D7
CK0 → CK: SDRAM D0-D7
CK0 → CK: SDRAM D0-D7
RESET → RESET: SDRAM D0-D7



Notes:

1. DQ-to-I/O wiring is shown as recommended but may be changed.
2. DQ/DQS/DQS/ODT/DM/CKE/S relationship must be maintained as shown.
3. DQ, DM, DQS/DQS resistors: Refer to associated topology diagram.
4. Refer to the appropriate clock wiring topology under the DIMM wiring details section of the JEDEC document.
5. For each DRAM, a unique ZQ resistor is connected to GND. The ZQ resistor is 240Ω±1%.
6. Refer to associated figure for SPD details.

MAXIMUM ELECTRICAL DC CHARACTERISTICS

PARAMETER/ CONDITION	SYMBOL	MIN	MAX	UNITS
Supply Voltage	V_{DD}	-0.4	1.975	V
I/O Supply Voltage	V_{DDQ}	-0.4	1.975	V
V_{DDL} Supply Voltage	V_{DDL}	-0.4	1.975	V
Voltage on any pin relative to V_{SS}	V_{IN}, V_{OUT}	-0.4	1.975	V
INPUT LEAKAGE CURRENT Any input $0V \leq V_{IN} \leq V_{DD}$, V_{REF} pin $0V \leq V_{IN} \leq 0.95V$ (All other pins not under test = 0V)	I_I			μA
Command/Address RAS#, CAS#, WE#, S#, CKE		-16	16	
CK, CK#		-16	16	
DM		-2	2	
OUTPUT LEAKAGE CURRENT (DQ's and ODT are disabled; $0V \leq V_{OUT} \leq V_{DDQ}$)	I_{OZ}	-5	5	μA
DQ, DQS, DQS#				
V_{REF} LEAKAGE CURRENT ; V_{REF} is on a valid level	I_{VREF}	-8	8	μA

DC OPERATING CONDITIONS

PARAMETER/ CONDITION	SYMBOL	MIN	NOM	MAX	UNITS
Supply Voltage	V_{DD}	1.425	1.5	1.575	V
I/O Supply Voltage	V_{DDQ}	1.425	1.5	1.575	V
V_{DDL} Supply Voltage	V_{DDL}	1.425	1.5	1.575	V
I/O Reference Voltage	V_{REF}	$0.49 \times V_{DDQ}$	$0.50 \times V_{DDQ}$	$0.51 \times V_{DDQ}$	V
I/O Termination Voltage (system)	V_{TT}	$0.49 \times V_{DDQ} - 20mV$	$0.50 \times V_{DDQ}$	$0.51 \times V_{DDQ} + 20mV$	V
Input High (Logic 1) Voltage	$V_{IH(DC)}$	$V_{REF} + 0.1$		$V_{DDQ} + 0.3$	V
Input Low (Logic 0) Voltage	$V_{IL(DC)}$	-0.3		$V_{REF} - 0.1$	V

AC INPUT OPERATING CONDITIONS

PARAMETER/ CONDITION	SYMBOL	MIN	MAX	UNITS
Input High (Logic 1) Voltage	$V_{IH(AC)}$	$V_{REF} + 0.175$	-	V
Input Low (Logic 0) Voltage	$V_{IL(AC)}$	-	$V_{REF} - 0.175$	V

CAPACITANCE

At DDR3 data rates, it is recommended to simulate the performance of the module to achieve optimum values. When inductance and delay parameters associated with trace lengths are used in simulations, they are significantly more accurate and realistic than a gross estimation of module capacitance. Simulations can then render a considerably more accurate result. JEDEC modules are now designed by using simulations to close timing budgets.

I_{DD} Specifications and Conditions

(0°C ≤ T_{CASE} ≤ +85°C, V_{DDQ} = +1.5V ± 0.075V, V_{DD} = +1.5V ± 0.075V)

Parameter & Test Condition	Symbol	max.		Unit	
		10600-999	8500-777		
OPERATING CURRENT *) : One device bank Active-Precharge; $t_{RC} = t_{RC}(I_{DD})$; $t_{CK} = t_{CK}(I_{DD})$; CKE is HIGH, CS# is HIGH between valid commands; DQ inputs changing once per clock cycle; Address and control inputs changing once every two clock cycles	I_{DD0}	880	800	mA	
OPERATING CURRENT *) : One device bank; Active-Read-Precharge; $I_{OUT} = 0mA$; BL = 4, CL = CL (I_{DD}), AL = 0; $t_{CK} = t_{CK}(I_{DD})$, $t_{RC} = t_{RC}(I_{DD})$, $t_{RAS} = t_{RAS} \text{ MIN}(I_{DD})$, $t_{RCD} = t_{RCD}(I_{DD})$; CKE is HIGH, CS# is HIGH between valid commands; Address inputs changing once every two clock cycles; Data Pattern is same as I_{DD4W}	I_{DD1}	1040	960	mA	
PRECHARGE POWER-DOWN CURRENT: All device banks idle; Power-down mode; $t_{CK} = t_{CK}(I_{DD})$; CKE is LOW; All Control and Address bus inputs are not changing; DQ's are floating at V_{REF}	Fast Exit	I_{DD2P}	200	200	mA
	Slow Exit		80	80	
PRECHARGE QUIET STANDBY CURRENT: All device banks idle; $t_{CK} = t_{CK}(I_{DD})$; CKE is HIGH, CS# is HIGH; All Control and Address bus inputs are not changing; DQ's are floating at V_{REF}	I_{DD2Q}	400	360	mA	
PRECHARGE STANDBY CURRENT: All device banks idle; $t_{CK} = t_{CK}(I_{DD})$; CKE is HIGH, CS# is HIGH; All other Control and Address bus inputs are changing once every two clock cycles; DQ inputs changing once per clock cycle	I_{DD2N}	440	400	mA	
ACTIVE POWER-DOWN CURRENT: All device banks open; $t_{CK} = t_{CK}(I_{DD})$; CKE is LOW; All Control and Address bus inputs are not changing; DQ's are floating at V_{REF} (always fast exit)	I_{DD3P}	280	240	mA	
ACTIVE STANDBY CURRENT: All device banks open; $t_{CK} = t_{CK}(I_{DD})$, $t_{RAS} = t_{RAS} \text{ MAX}(I_{DD})$, $t_{RP} = t_{RP}(I_{DD})$; CKE is HIGH, CS# is HIGH between valid commands; All other Control and Address bus inputs are changing once every two clock cycles; DQ inputs changing once per clock cycle	I_{DD3N}	480	440	mA	
OPERATING READ CURRENT: All device banks open, Continuous burst reads; One module rank active; $I_{OUT} = 0mA$; BL = 4, CL = CL (I_{DD}), AL = 0; $t_{CK} = t_{CK}(I_{DD})$, $t_{RAS} = t_{RAS} \text{ MAX}(I_{DD})$, $t_{RP} = t_{RP}(I_{DD})$; CKE is HIGH, CS# is HIGH between valid commands; Address bus inputs are changing once every two clock cycles; DQ inputs changing once per clock cycle	I_{DD4R}	1600	1280	mA	

Parameter & Test Condition	Symbol	max.		Unit
		10600-999	8500-777	
OPERATING WRITE CURRENT: All device banks open, Continuous burst writes; One module rank active; BL = 4, CL = CL (I _{DD}), AL = 0; t _{CK} = t _{CK} (I _{DD}), t _{RAS} = t _{RAS} MAX (I _{DD}), t _{RP} = t _{RP} (I _{DD}); CKE is HIGH, CS# is HIGH between valid commands; Address bus inputs are changing once every two clock cycles; DQ inputs changing once per clock cycle	I _{DD4W}	1520	1280	mA
BURST REFRESH CURRENT: t _{CK} = t _{CK} (I _{DD}); refresh command at every t _{RFC} (I _{DD}) interval, CKE is HIGH, CS# is HIGH between valid commands; All other Control and Address bus inputs are changing once every two clock cycles; DQ inputs changing once per clock cycle	I _{DD5}	1920	1760	mA
SELF REFRESH CURRENT: CK and CK# at 0V; CKE ≤ 0.2V; All other Control and Address bus inputs are floating at V _{REF} ; DQ's are floating at V _{REF}	I _{DD6}	48	48	mA
OPERATING CURRENT*) : Four device bank interleaving READs, I _{OUT} = 0mA; BL = 4, CL = CL (I _{DD}), AL = t _{RCD} (I _{DD}) - 1 x t _{CK} (I _{DD}); t _{CK} = t _{CK} (I _{DD}), t _{RC} = t _{RC} (I _{DD}), t _{RRD} = t _{RRD} (I _{DD}), t _{RCD} = t _{RCD} (I _{DD}); CKE is HIGH, CS# is HIGH between valid commands; Address bus inputs are not changing during DESELECT; DQ inputs changing once per clock cycle	I _{DD7}	3920	3120	mA

*) Value calculated as one module rank in this operating condition, and all other module ranks in IDD2P (CKE LOW) mode.

TIMING VALUES USED FOR I_{DD} MEASUREMENT

I _{DD} MEASUREMENT CONDITIONS			
SYMBOL	10600-999	8500-777	Unit
CL (I _{DD})	9	7	t _{CK}
t _{RCD} (I _{DD})	13.5	13.125	ns
t _{RC} (I _{DD})	49.5	50.625	ns
t _{RRD} (I _{DD})	6	7.5	ns
t _{CK} (I _{DD})	1.5	1.87	ns
t _{RAS} MIN (I _{DD})	36	37.5	ns
t _{RAS} MAX (I _{DD})	70'200	70'200	ns
t _{RP} (I _{DD})	13.5	13.125	ns
t _{RFC} (I _{DD})	110	110	ns

DDR3 SDRAM COMPONENT ELECTRICAL CHARACTERISTICS AND RECOMMENDED AC OPERATING CONDITIONS
 $(0^{\circ}\text{C} \leq T_{\text{CASE}} \leq +85^{\circ}\text{C}, V_{\text{DDQ}} = +1.5\text{V} \pm 0.075\text{V}, V_{\text{DD}} = +1.5\text{V} \pm 0.075\text{V})$

AC CHARACTERISTICS			10600-999		8500-777		Unit
PARAMETER		SYMBOL	MIN	MAX	MIN	MAX	
Clock cycle time	CL = 10	$t_{\text{CK}}(10)$	1.5	<1.875	-	-	ns
	CL = 9	$t_{\text{CK}}(9)$	1.5	<1.875	-	-	ns
	CL = 8	$t_{\text{CK}}(8)$	1.875	<2.5	-	-	ns
	CL = 7	$t_{\text{CK}}(7)$	1.875	<2.5	1.875	<2.5	ns
	CL = 6	$t_{\text{CK}}(6)$	2.5	3.3	2.5	3.3	ns
	CL = 5	$t_{\text{CK}}(5)$					ns
CK high-level width		t_{CH}	0.47	0.53	0.47	0.53	t_{CK}
CK low-level width		t_{CL}	0.47	0.53	0.47	0.53	t_{CK}
Data-out high-impedance window from CK/CK#		t_{HZ}		0.25		0.3	ns
Data-out low-impedance window from CK/CK#		t_{LZ}	-0.5	0.25	-0.6	0.3	ns
DQ and DM input setup time relative to DQS		$t_{\text{DS(Base)}}$	30		25		ps
DQ and DM input hold time relative to DQS		$t_{\text{DH(Base)}}$	65		100		ps
DQ and DM input setup time relative to DQS $V_{\text{REF}}=1\text{V/ns}$		t_{DS1V}	180		200		ps
DQ and DM input hold time relative to DQS $V_{\text{REF}}=1\text{V/ns}$		t_{DH1V}	165		200		ps
DQ and DM input pulse width (for each input)		t_{DIPW}	0.4		0.49		ns
DQS, DQS# to DQ skew, per access		t_{DQSQ}		125		150	ps
DQ-DQS hold, DQS to first DQ to go non-valid, per access		t_{QH}	0.38		0.38		t_{CK} (AVG)
DQS input high pulse width		t_{DQSH}	0.45	0.55	0.45	0.55	t_{CK}
DQS input low pulse width		t_{DQSL}	0.45	0.55	0.45	0.55	t_{CK}
DQS, DQS# rising to/from CK, CK#		t_{DQSK}	-255	+255	-300	300	ps
DQS, DQS# rising to/from CK, CK# when DLL disabled		$t_{\text{DQSK}}^{\text{DLL DIS}}$	1	10	1	10	ns
DQS falling edge to CK rising - setup time		t_{DSS}	0.2		0.2		t_{CK}
DQS falling edge from CK rising - hold time		t_{DSH}	0.2		0.2		t_{CK}
DQS read preamble		t_{RPRE}	0.9	Note1	0.9	Note1	t_{CK}
DQS read postamble		t_{RPST}	0.3	Note2	0.3	Note2	t_{CK}
DQS write preamble		t_{WPRE}	0.9		0.9		t_{CK}
DQS write postamble		t_{WPST}	0.3		0.3		t_{CK}
Positive DQS latching edge to associated clock edge		t_{DQSS}	- 0.25	+ 0.25	- 0.25	+ 0.25	t_{CK}
Address and control input pulse width (for each input)		t_{IPW}	620		780		ps
CTRL, CMD, Addr setup to CK, CK#		$t_{\text{IS(Base)}}$	65		125		ps
CTRL, CMD, Addr setup to CK, CK# $V_{\text{REF}} @ 1\text{V/ns}$		$t_{\text{IS(1V)}}$	240		300		ps

- 1 The maximum preamble is bound by t_{LZDQS} (MAX)
- 2 The maximum postamble is bound by t_{HZDQS} (MAX)

DDR3 SDRAM COMPONENT ELECTRICAL CHARACTERISTICS AND RECOMMENDED AC OPERATING CONDITIONS (Continued)

(0°C ≤ T_{CASE} ≤ +85°C ; V_{DDQ} = +1.5V ± 0.075V, V_{DD} = +1.5V ± 0.075V)


AC CHARACTERISTICS		10600-999		8500-777		Unit
PARAMETER	SYMBOL	MIN	MAX	MIN	MAX	
CTRL, CMD, Addr hold to CK, CK#	t _{IH(Base)}	140		200		ps
CTRL, CMD, Addr hold to CK, CK# V _{REF} @ 1V/ns	t _{IH(1V)}	240		300		ps
CAS# to CAS# command delay	t _{CCD}	4		4		t _{CK}
ACTIVE to ACTIVE (same bank) command period	t _{RC}	49.5		50.625		ns
ACTIVE bank a to ACTIVE bank b command	t _{RRD}	6		7.5		ns
ACTIVE to READ or WRITE delay	t _{RCD}	13.5		13.125		ns
Four bank Activate period	t _{FAW}	30		37.5		ns
1K Page size 2K Page size		45		50		
ACTIVE to PRECHARGE command	t _{RAS}	36	70'200	37.5	70'200	ns
Internal READ to precharge command delay	t _{RTP}	7.5		7.5		ns
Write recovery time	t _{WR}	15		15		ns
Auto precharge write recovery + precharge time	t _{DAL}	t _{WR} + t _{RP} /t _{CK}		t _{WR} + t _{RP} /t _{CK}		ns
Internal WRITE to READ command delay	t _{WTR}	7.5		7.5		ns
PRECHARGE command period	t _{RP}	15		13.125		ns
LOAD MODE command cycle time	t _{MRD}	4		4		t _{CK}
REFRESH to ACTIVE or REFRESH to REFRESH command interval	t _{RFC}	110	70'200	110	70'200	ns
Average periodic refresh interval 0 °C ≤ T _{CASE} ≤ 85 °C	t _{REFI}		7.8		7.8	µs
85 °C < T _{CASE} ≤ 95 °C	t _{REFI (IT)}		3.9		3.9	
RTT turn-on from ODTL on reference	t _{AON}	-250	250	-300	300	ps
RTT turn-on from ODTL off reference	t _{AOFF}	0.3	0.7	0.3	0.7	t _{CK}
Asynchronous RTT turn-on delay (power Down with DLL off)	t _{AONPD}	1	9	1	9	ns
Asynchronous RTT turn-off delay (power Down with DLL off)	t _{AOFPD}	1	9	1	9	ns
RTT dynamic change skew	t _{ADC}	0.3	0.7	0.3	0.7	t _{CK}
Exit self refresh to commands not requiring a locked DLL	t _{XS}	120		120		ns
Write levelling setup from rising CK, CK# crossing to rising DQS, DQS# crossing	t _{WLS}	195		245		ps
Write levelling setup from rising DQS, DQS# crossing to rising CK, CK# crossing	t _{WLH}	195		245		ps
First DQS, DQS# rising edge	t _{WLMRD}	40		40		t _{CK}
DQS, DQS# delay	t _{WLDQSEN}	25		25		t _{CK}

DDR3 SDRAM COMPONENT ELECTRICAL CHARACTERISTICS AND RECOMMENDED AC OPERATING CONDITIONS (Continued)

(0°C ≤ T_{CASE} ≤ +85°C ; V_{DDQ} = +1.5V ± 0.075V, V_{DD} = +1.5V ± 0.075V)

AC CHARACTERISTICS		10600-999		8500-777		Unit
PARAMETER	SYMBOL	MIN	MAX	MIN	MAX	
Exit reset from CKE HIGH to a valid command	t _{XPR}	120		120		ns
Begin power supply ramp to power supplies stable	t _{VDDPR}		200		200	ms
RESET# LOW to power supplies stable	t _{RPS}		200		200	ms
RESET# LOW to I/O and RTT High-Z	t _{IOz}		20		20	ns
Exit precharge power-down to any non-READ command	t _{XP}	6		7.5		ns
CKE minimum high/low time	t _{CKE}	5.625		5.625		t _{CK}

Serial Presence-Detect EEPROM

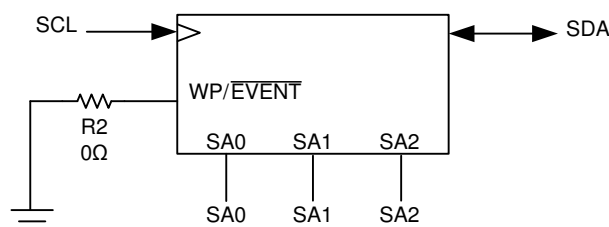


SERIAL PRESENCE-DETECT MATRIX

Byte	Byte Description	10600-999	8500-777
0	CRC RANGE, EEPROM BYTES, BYTES USED	0x92	
1	SPD REVISION	0x10	
2	DRAM DEVICE TYPE	0x0B	
3	MODULE TYPE (FORM FACTOR)	0x02	
4	SDRAM DEVICE DENSITY & BANKS	0x02	
5	SDRAM DEVICE ROW & COLUMN COUNT	0x11	
6	BYTE 6 RESERVED	0x00	
7	MODULE RANKS & DEVICE DQ COUNT	0x01	
8	ECC TAG & MODULE MEMORY BUS WIDTH	0x03	
9	FINE TIMEBASE DIVIDEND/DIVISOR	0x52	
10	MEDIUM TIMEBASE DIVIDEND	0x01	
11	MEDIUM TIMEBASE DIVISOR	0x08	
12	MIN SDRAM CYCLE TIME ($t_{CK\ MIN}$)	0x0C	0x0F
13	BYTE 13 RESERVED	0x00	
14	CAS LATENCIES SUPPORTED (CL4 => CL11)	0x7E	0x1E
15	CAS LATENCIES SUPPORTED (CL12 => CL18)	0x00	
16	MIN CAS LATENCY TIME ($t_{AA\ MIN}$)	0x6C	0x69
17	MIN WRITE RECOVERY TIME ($t_{WR\ MIN}$)	0x78	
18	MIN RAS# TO CAS# DELAY ($t_{RCD\ MIN}$)	0x6C	0x69
19	MIN ROW ACTIVE TO ROW ACTIVE DELAY ($t_{RRD\ MIN}$)	0x30	0x3C
20	MIN ROW PRECHARGE DELAY ($t_{RP\ MIN}$)	0x6C	0x69
21	UPPER NIBBLE FOR t_{RAS} & t_{RC}	0x11	
22	MIN ACTIVE TO PRECHARGE DELAY ($t_{RAS\ MIN}$)	0x20	0x2C
23	MIN ACTIVE TO ACTIVE/REFRESH DELAY ($t_{RC\ MIN}$)	0x8C	0x95
24	MIN REFRESH RECOVERY DELAY ($t_{RFC\ MIN}$) LSB	0x70	
25	MIN REFRESH RECOVERY DELAY ($t_{RFC\ MIN}$) MSB	0x03	
26	MIN INTERNAL WRITE TO READ CMD DELAY ($t_{WTR\ MIN}$)	0x3C	
27	MIN INTERNAL READ TO PRECHARGE CMD DELAY ($t_{RTP\ MIN}$)	0x3C	
28	MIN FOUR ACTIVE WINDOW DELAY ($t_{FAW\ MIN}$) MSB	0x00	0x01
29	MIN FOUR ACTIVE WINDOW DELAY ($t_{FAW\ MIN}$) LSB	0xF0	0x2C
30	SDRAM DEVICE OUTPUT DRIVERS SUPPORTED	0x82	
31	SDRAM DEVICE THERMAL & REFRESH OPTIONS	0x05	

Byte	Byte Description	10600-999	8500-777
32-59	BYTES 32-59 RESERVED	0x00	
60	MODULE HEIGHT (NOMINAL)	0x0F	
61	MODULE THICKNESS (MAX)	0x01	
62	REFERENCE RAW CARD ID	0x00	
63	ADDRESS MAPPING EDGE CONECTOR TO DRAM	0x00	
64-116	BYTES 64-116 RESEVED	0x00	
117	MODULE MFR ID (LSB)	0x83	
118	MODULE MFR ID (MSB)	0xDA	
119	MODULE MFR LOCATION ID	0x01 (Switzerland) 0x02 (Germany) 0x03 (USA)	
120	MODULE MFR YEAR	X	
121	MODULE MFR WEEK	X	
122-125	MODULE SERIAL NUMBER	X	
126-127	CRC	0x1461	0xB7C9
128-145	MODULE PART NUMBER	"SGU01G64A1BG1MT-xx"	
146	MODULE DIE REV	X	
147	MODULE PCB REV	X	
148	DRAM DEVICE MFR ID (LSB)	0x80	
149	DRAM DEVICE MFR (MSB)	0x2C	
150-175	MFR RESERVED BYTES 150-175	0x00	
176-255	CUSTOMER RESERVED BYTES 176-255	0xFF	

Part Number Code

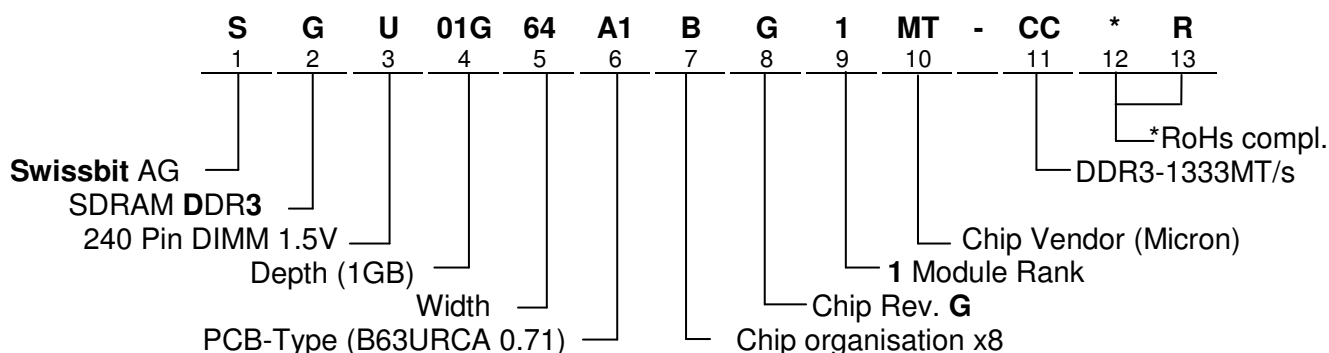

* optional / additional information

Locations
Swissbit AG

Industriestrasse 4
CH – 9552 Bronschhofen
Switzerland
Phone: +41 (0)71 913 03 03
Fax: +41 (0)71 913 03 15

Swissbit Germany GmbH

Wolfener Strasse 36
D – 12681 Berlin
Germany
Phone: +49 (0)30 93 69 54 – 0
Fax: +49 (0)30 93 69 54 – 55

Swissbit NA, Inc.

14 Willett Avenue, Suite 301A
Port Chester, NY 10573
USA
Phone: +1 914 935 1400
Fax: +1 914 935 9865

Swissbit NA, Inc.

3913 Todd Lane, Suite – 307
Austin, TX 78744
USA
Phone: +1 512 302 9001
Fax: +1 512 302 4808