

This Swissbit module family is industry standard 184-pin 8-byte Double Data rate synchronous SDRAM Dual-In-line Memory Modules (DIMMs), which are organized as x64 high speed memory arrays designed for use in non-parity applications. DIMMs are assembled in TSOP Technology. The passive devices and the EEPROM are SMD components.

The DIMM use serial presence detects (SPD) implemented via serial EEPROM using the two-pin-I²C protocol. The first 128 bytes are utilized by the DIMM manufacturer and the second 128 bytes are available to the end user.

All Swissbit DIMMs provide a high performance, flexible 8-byte interface in a 133.35mm long footprint.

All modules of the extended temperature grade have seen special tests during the manufacturing process to ensure proper operation according to the field of operation as stated in the environmental conditions.

Module Configuration

| Organization | DDR SDRAMs used | Row Addr. | Bank Select | Col. Addr. | Refresh | Module Dimensions in mm |
|--------------|-----------------|-----------|-------------|------------|---------|-------------------------|
| 64M x 64 | 8 x 64M x 8 | 13 | BA0, BA1 | 11 | 8k | 133,35 max |

Product Spectrum

| Part Number | Module Density | Transfer Rate | Memory clock/Data bit rate | Latency |
|----------------------------|----------------|---------------|----------------------------|-----------|
| SDU06464B5B61MT-50[E/I/W]R | 512MB | 3.2 GB/s | 5.0ns/400MT/s | 3200-3033 |
| SDU06464B5B61MT-60[E/I/W]R | 512MB | 2.7 GB/s | 6.0ns/333MT/s | 2700-2533 |
| SDU06464B5B61MT-75[E/I/W]R | 512MB | 2.1 GB/s | 7.5ns/266MT/s | 2100-2533 |

Pin Name

| | |
|-------------|-----------------------------|
| A0-A12 | Address Inputs |
| BA0, BA1 | Bank Selects |
| DQ0 – DQ63 | Data Input/Output |
| DM0-DM7 | Data Masks |
| /RAS | Row Address Strobe |
| /CAS | Column Address Strobe |
| /WE | Read / Write Enable |
| CKE0 | Clock Enable |
| CK0 – CK2 | Clock Inputs, positive line |
| /CK0 – /CK2 | Clock Inputs, negative line |
| DQS0- DQS7 | Data strobes |



| | |
|--------------------|--|
| /S0 | Chip Select |
| V _{DD} | Power (2.5V± 0.2V) |
| V _{DDQ} | DQ Power (2.5V±0.2V) |
| V _{DDSPD} | SPD Power |
| V _{REF} | Input/Output Reference |
| V _{SS} | Ground |
| SCL | Clock for Presence Detect |
| SDA | Serial Data Out for Presence Detect |
| SA0 – SA2 | Slave Address Select Bus for Presence Detect |
| NC | No Connection |

Pin Configuration


| Front Side | | | | Back Side | | | |
|------------|------------------|-------|------------------|-----------|------------------|-------|------------------|
| PIN # | PIN Name | PIN # | PIN Name | PIN # | PIN Name | PIN # | PIN Name |
| 1 | V _{REF} | 47 | DQS8 | 93 | V _{SS} | 139 | V _{SS} |
| 2 | DQ0 | 48 | A0 | 94 | DQ4 | 140 | DM8 |
| 3 | V _{SS} | 49 | NC | 95 | DQ5 | 141 | A10 |
| 4 | DQ1 | 50 | V _{SS} | 96 | V _{DDQ} | 142 | NC |
| 5 | DQS0 | 51 | NC | 97 | DM0 | 143 | V _{DDQ} |
| 6 | DQ2 | 52 | BA1 | 98 | DQ6 | 144 | NC |
| 7 | V _{DD} | 53 | DQ32 | 99 | DQ7 | 145 | V _{SS} |
| 8 | DQ3 | 54 | V _{DDQ} | 100 | V _{SS} | 146 | DQ36 |
| 9 | NC | 55 | DQ33 | 101 | NC | 147 | DQ37 |
| 10 | NC | 56 | DQS4 | 102 | NC | 148 | V _{DD} |
| 11 | V _{SS} | 57 | DQ34 | 103 | NC | 149 | DM4 |
| 12 | DQ8 | 58 | V _{SS} | 104 | V _{DDQ} | 150 | DQ38 |
| 13 | DQ9 | 59 | BA0 | 105 | DQ12 | 151 | DQ39 |
| 14 | DQS1 | 60 | DQ35 | 106 | DQ13 | 152 | V _{SS} |
| 15 | V _{DDQ} | 61 | DQ40 | 107 | DM1 | 153 | DQ44 |
| 16 | NC | 62 | V _{DDQ} | 108 | V _{DD} | 154 | /RAS |
| 17 | NC | 63 | /WE | 109 | DQ14 | 155 | DQ45 |
| 18 | V _{SS} | 64 | DQ41 | 110 | DQ15 | 156 | V _{DDQ} |
| 19 | DQ10 | 65 | /CAS | 111 | NC | 157 | /S0 |
| 20 | DQ11 | 66 | V _{SS} | 112 | V _{DDQ} | 158 | NC |
| 21 | CKE0 | 67 | DQS5 | 113 | NC | 159 | DM5 |
| 22 | V _{DDQ} | 68 | DQ42 | 114 | DQ20 | 160 | V _{SS} |
| 23 | DQ16 | 69 | DQ43 | 115 | A12 | 161 | DQ46 |
| 24 | DQ17 | 70 | V _{DD} | 116 | V _{SS} | 162 | DQ47 |
| 25 | DQS2 | 71 | NC | 117 | DQ21 | 163 | NC |

| Front Side | | | | Back Side | | | |
|------------|------------------|-------|------------------|-----------|------------------|-------|--------------------|
| PIN # | PIN Name | PIN # | PIN Name | PIN # | PIN Name | PIN # | PIN Name |
| 26 | V _{SS} | 72 | DQ48 | 118 | A11 | 164 | V _{DDQ} |
| 27 | A9 | 73 | DQ49 | 119 | DM2 | 165 | DQ52 |
| 28 | DQ18 | 74 | V _{SS} | 120 | V _{DD} | 166 | DQ53 |
| 29 | A7 | 75 | NC | 121 | DQ22 | 167 | NC |
| 30 | V _{DDQ} | 76 | NC | 122 | A8 | 168 | V _{DD} |
| 31 | DQ19 | 77 | V _{DDQ} | 123 | DQ23 | 169 | DM6 |
| 32 | A5 | 78 | DQS6 | 124 | V _{SS} | 170 | DQ54 |
| 33 | DQ24 | 79 | DQ50 | 125 | A6 | 171 | DQ55 |
| 34 | V _{SS} | 80 | DQ51 | 126 | DQ28 | 172 | V _{DDQ} |
| 35 | DQ25 | 81 | V _{SS} | 127 | DQ29 | 173 | NC |
| 36 | DQS3 | 82 | NC | 128 | V _{DDQ} | 174 | DQ60 |
| 37 | A4 | 83 | DQ56 | 129 | DM3 | 175 | DQ61 |
| 38 | V _{DD} | 84 | DQ57 | 130 | A3 | 176 | V _{SS} |
| 39 | DQ26 | 85 | V _{DD} | 131 | DQ30 | 177 | DM7 |
| 40 | DQ27 | 86 | DQS7 | 132 | V _{SS} | 178 | DQ62 |
| 41 | A2 | 87 | DQ58 | 133 | DQ31 | 179 | DQ63 |
| 42 | V _{SS} | 88 | DQ59 | 134 | NC | 180 | V _{DDQ} |
| 43 | A1 | 89 | V _{SS} | 135 | NC | 181 | SA0 |
| 44 | NC | 90 | NC | 136 | V _{DDQ} | 182 | SA1 |
| 45 | NC | 91 | SDA | 137 | CK0 | 183 | SA2 |
| 46 | V _{DD} | 92 | SCL | 138 | /CK0 | 184 | V _{DDSPD} |

FUNCTIONAL BLOCK DIAGRAM 512DDR SDRAM DIMM 1RANK; NON-ECC

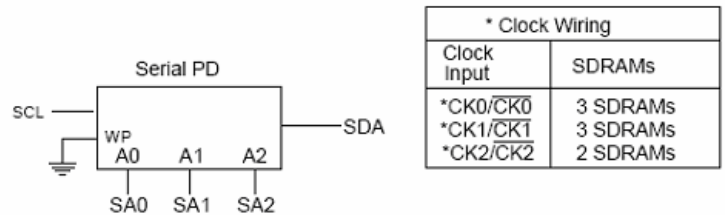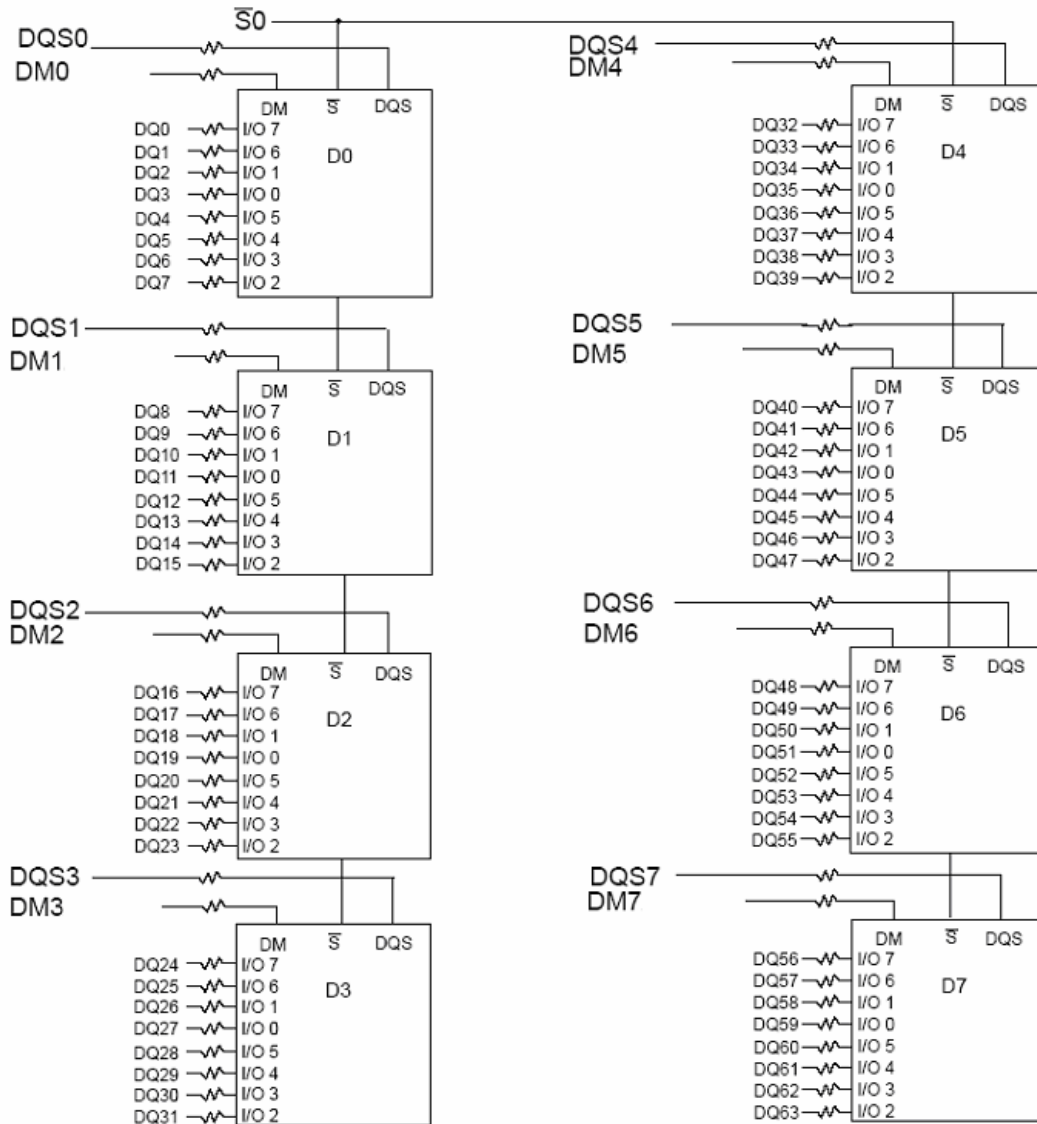

- BA0 - BA1 ———— BA0-BA1: SDRAMs D0 - D7
- A0 - A13 ———— A0-A13: SDRAMs D0 - D7
- RAS ———— RAS: SDRAMs D0 - D7
- CAS ———— CAS: SDRAMs D0 - D7
- CKE0 ———— CKE: SDRAMs D0 - D7
- WE ———— WE: SDRAMs D0 - D7

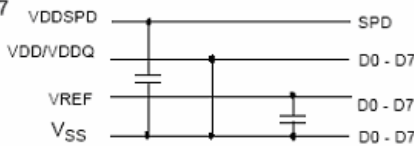

DC ELECTRICAL CHARACTERISTICS AND OPERATING CONDITIONS

 (0°C ≤ T_A ≤ +70°C ; V_{DD} = +2.5V ± 0.2V, V_{DDQ} = +2.5V ± 0.2V) see Note 1 on Page 9

| PARAMETER/ CONDITION | SYMBOL | MIN | MAX | UNITS |
|---|---------------------|-------------------------|-------------------------|-------|
| Supply Voltage | V _{DD} | 2.3 | 2.7 | V |
| I/O Supply Voltage | V _{DDQ} | 2.3 | 2.7 | V |
| I/O Reference Voltage | V _{REF} | 0.49 x V _{DDQ} | 0.51 x V _{DDQ} | V |
| I/O Termination Voltage (system) | V _{TT} | V _{REF} - 0.04 | V _{REF} + 0.04 | V |
| Input High (Logic 1) Voltage | V _{IH(DC)} | V _{REF} + 0.15 | V _{DD} + 0.3 | V |
| Input Low (Logic 0) Voltage | V _{IL(DC)} | -0.3 | V _{REF} - 0.15 | V |
| INPUT LEAKAGE CURRENT Any input 0V ≤ V _{IN} ≤ V _{DD} , V _{REF} pin 0V ≤ V _{IN} ≤ 1.35V (All other pins not under test = 0V) | I _I | -10 | 10 | μA |
| OUTPUT LEAKAGE CURRENT (DQ _S are disabled; 0V ≤ V _{OUT} ≤ V _{DDQ}) | I _{OZ} | -10 | 10 | μA |
| OUTPUT LEVELS: High Current (V _{OUT} = V _{DDQ} -0.373V, minimum V _{REF} , minimum V _{TT}) | I _{OH} | -16.8 | - | mA |
| Low Current (V _{OUT} = 0.373V, maximum V _{REF} , maximum V _{TT}) | I _{OL} | 16.8 | - | mA |

AC INPUT OPERATING CONDITIONS

 (0°C ≤ T_A ≤ +70°C ; V_{DD} = +2.5V ± 0.2V, V_{DDQ} = +2.5V ± 0.2V) see Note 1 on Page 9

| PARAMETER/ CONDITION | SYMBOL | MIN | MAX | UNITS |
|------------------------------|----------------------|--------------------------|--------------------------|-------|
| Input High (Logic 1) Voltage | V _{IH(AC)} | V _{REF} + 0.310 | - | V |
| Input Low (Logic 0) Voltage | V _{IL(AC)} | - | V _{REF} - 0.310 | V |
| I/O Reference Voltage | V _{REF(AC)} | 0.49 x V _{DDQ} | 0.51 x V _{DDQ} | V |

CAPACITANCE

| PARAMETER | SYMBOL | MIN | MAX | UNITS |
|--|-----------------|------|------|-------|
| Input/Output Capacitance: DQ, DQS | C ₁₀ | 4.0 | 5.0 | pF |
| Input Capacitance: Command and Address | C ₁₁ | 18.0 | 27.0 | pF |
| Input Capacitance: /S 0,1 | C ₁₁ | 18.0 | 27.0 | pF |
| Input Capacitance: CK, /CK | C ₁₂ | 10.0 | 14.0 | pF |
| Input Capacitance: CKE | C ₁₃ | 18.0 | 27.0 | pF |

I_{DD} Specifications AND CONDITIONS

 (0°C ≤ T_A ≤ +70°C ; V_{DDQ} = +2.5V ± 0.2V, V_{DD} = +2.5V ± 0.2V) see Note 1 on Page 9

| Parameter & Test Condition | Symb. | max. | | | | |
|--|---|------------------|-----------|-----------|------|----|
| | | 3200-3033 | 2700-2533 | 2100-2533 | Unit | |
| OPERATING CURRENT *) : One device bank; Active-Precharge; t _{RC} = t _{RC} (Min); t _{CK} = t _{CK} (Min); DQ, DM and DQS inputs changing once per clock cycle; Address and control inputs changing once every two clock cycles | I _{DD0} | 1240 | 1040 | 920 | mA | |
| OPERATING CURRENT :*) One device bank; Active-Read-Precharge; Burst = 2; t _{RC} = t _{RC} (Min); t _{CK} = t _{CK} (Min); I _{OUT} = 0mA; Address and control inputs changing once per clock cycle | I _{DD1} | 1480 | 1280 | 1160 | mA | |
| PRECHARGE POWER-DOWN STANDBY CURRENT: All device banks idle; Power-down mode; t _{CK} = t _{CK} (Min); CKE = (LOW) | I _{DD2P} | 40 | 40 | 40 | mA | |
| IDLE STANDBY CURRENT: CS# = HIGH; All device banks idle; t _{CK} = t _{CK} (Min); CKE = HIGH; Address and other control inputs changing once per clock cycle. V _{IN} = V _{REF} for DQ, DQS, and DM | I _{DD2F} | 440 | 360 | 320 | mA | |
| ACTIVE POWER-DOWN STANDBY CURRENT: One device bank active; Power-down mode; t _{CK} = t _{CK} (Min); CKE = LOW | I _{DD3P} | 360 | 280 | 240 | mA | |
| ACTIVE STANDBY CURRENT: CS# = HIGH; CKE = HIGH; One device bank; Active-Precharge; t _{RC} = t _{RAS} (Max); t _{CK} = t _{CK} (Min); DQ, DM and DQS inputs changing twice per clock cycle; Address and other control inputs changing once per clock cycle | I _{DD3N} | 480 | 400 | 360 | mA | |
| OPERATING CURRENT: Burst = 2; Reads; Continuous burst; One bank active; Address and control inputs changing once per clock cycle; t _{CK} = t _{CK} (Min); I _{OUT} = 0mA | I _{DD4R} | 1520 | 1320 | 1160 | mA | |
| OPERATING CURRENT: Burst = 2; Writes; Continuous burst; One device bank active; Address and control inputs changing once per clock cycle; t _{CK} = t _{CK} (Min); DQ, DM, and DQS inputs changing twice per clock cycle | I _{DD4W} | 1560 | 1400 | 1080 | mA | |
| AUTO REFRESH CURRENT | t _{RC} = t _{RC} (Min) | I _{DD5} | 2760 | 2320 | 2240 | mA |
| | t _{RC} = 7.8125µs | I _{DD6} | 88 | 80 | 80 | mA |
| SELF REFRESH CURRENT: CKE ≤ 0.2V | I _{DD7} | 40 | 40 | 40 | mA | |
| OPERATING CURRENT*): Four device bank interleaving READs (BL =4) with auto precharge, t _{RC} = t _{RC} (Min); t _{CK} = t _{CK} (Min); Address and control inputs change only during Active READ, or WRITE commands | I _{DD8} | 3600 | 3240 | 2800 | mA | |

*) Value calculated as one module rank in this operating condition, and all other module ranks in IDD2P (CKE LOW) mode.

DDR SDRAM COMPONENT ELECTRICAL CHARACTERISTICS AND RECOMMENDED AC OPERATING CONDITIONS

 (0°C ≤ T_A ≤ +70°C ; V_{DDQ} = +2.5V ± 0.2V, V_{DD} = +2.5V ± 0.2V) see Note 1 on Page 9

| AC CHARACTERISTICS | | 3200-3033 | | 2700-2533 | | 2100-2533 | | | |
|---|--------------------|-------------------------------------|-------|-------------------------------------|-------|-------------------------------------|-------|-----------------|----|
| PARAMETER | SYMBOL | MIN | MAX | MIN | MAX | MIN | MAX | Unit | |
| Access window of DQ _s CK/CK# | t _{AC} | -0.70 | +0.70 | -0.70 | +0.70 | -0.75 | +0.75 | ns | |
| CK high-level width | t _{CH} | 0.45 | 0.55 | 0.45 | 0.55 | 0.45 | 0.55 | t _{CK} | |
| CK low-level width | t _{CL} | 0.45 | 0.55 | 0.45 | 0.55 | 0.45 | 0.55 | t _{CK} | |
| Clock cycle time | CL=2.0 | t _{ck (2.0)} | 7.5 | 13.0 | 7.5 | 13.0 | 10 | 13.0 | |
| | CL=2.5 | t _{ck (2.5)} | 6.0 | 13.0 | 6.0 | 13.0 | 7.5 | 13.0 | ns |
| | CL=3.0 | t _{ck (3.0)} | 5.0 | 13.0 | | | | | ns |
| DQ and DM input hold time relative to DQS | t _{DH} | 0.40 | | 0.45 | | 0.5 | | ns | |
| DQ and DM input setup time relative to DQS | t _{DS} | 0.40 | | 0.45 | | 0.5 | | ns | |
| DQ and DM input pulse width (for each input) | t _{DIPW} | 1.75 | | 1.75 | | 1.75 | | ns | |
| Access window of DQS from CK/CK# | t _{DQSCK} | -0.6 | +0.6 | -0.6 | +0.6 | -0.75 | +0.75 | ns | |
| DQS input high pulse width | t _{DQSH} | 0.35 | | 0.35 | | 0.35 | | t _{CK} | |
| DQS input low pulse width | t _{DQSL} | 0.35 | | 0.35 | | 0.35 | | t _{CK} | |
| DQS -DQ skew, DQS to last DQ valid, per group, per access | t _{DQSQ} | | 0.40 | | 0.45 | | 0.5 | ns | |
| Write command to first DQS latching transition | t _{DQSS} | 0.72 | 1.28 | 0.75 | 1.25 | 0.75 | 1.25 | t _{CK} | |
| DQS falling edge to CK rising- setup time | t _{DSS} | 0.2 | | 0.2 | | 0.2 | | t _{CK} | |
| DQS falling edge from CK rising- hold time | t _{DSH} | 0.2 | | 0.2 | | 0.2 | | t _{CK} | |
| Half clock period | t _{HP} | t _{ch,} t _{cl} | | t _{ch,} t _{cl} | | t _{ch,} t _{cl} | | ns | |
| Data-out high-impedance window from CK/CK# | t _{HZ} | | +0.7 | | +0.7 | | +0.75 | ns | |
| Data-out low-impedance window from CK/CK# | t _{LZ} | -0.7 | | -0.7 | | -0.75 | | ns | |
| Address and control input hold time (fast slew rate) | t _{IHF} | 0.6 | | 0.75 | | 0.90 | | ns | |
| Address and control input setup time (fast slew rate) | t _{ISF} | 0.6 | | 0.75 | | 0.90 | | ns | |
| Address and control input hold time (slow slew rate) | t _{IHS} | 0.6 | | 0.8 | | 1 | | ns | |
| Address and control input setup time (slow slew rate) | t _{ISS} | 0.6 | | 0.8 | | 1 | | ns | |
| LOAD MODE REGISTER command cycle time | t _{MRD} | 10 | | 12 | | 15 | | ns | |
| Adress and control input pulse width (for each input) | t _{IPW} | 2.2 | | 2.2 | | 2.2 | | ns | |
| DQ-DQS hold, DQS to first DQ to go non-valid, per access | t _{QH} | t _{HP} - t _{QHS} | | t _{HP} - t _{QHS} | | t _{HP} - t _{QHS} | | ns | |
| Data hold skew factor | t _{QHS} | | 0.5 | | 0.6 | | 0.75 | ns | |

| AC CHARACTERISTICS | | 3200-3033 | | 2700-2533 | | 2100-2533 | | |
|--|-------------|---------------------|--------|---------------------|--------|---------------------|---------|----------|
| PARAMETER | SYMBOL | MIN | MAX | MIN | MAX | MIN | MAX | Unit |
| ACTIVE to PRECHARGE command | t_{RAS} | 40 | 70.000 | 42 | 70.000 | 40 | 120.000 | ns |
| ACTIVE to READ with Auto precharge command | t_{RAP} | 15 | | 15 | | 20 | | ns |
| ACTIVE to ACTIVE/AUTO REFRESH command period | t_{RC} | 55 | | 60 | | 65 | | ns |
| AUTO REFRESH command period | t_{RFC} | 70 | | 72 | | 75 | | ns |
| ACTIVE to READ or WRITE delay | t_{RCD} | 15 | | 15 | | 20 | | ns |
| PRECHARGE command period | t_{RP} | 15 | | 15 | | 20 | | ns |
| DQS read preamble | t_{RPRE} | 0.9 | 1.1 | 0.9 | 1.1 | 0.9 | 1.1 | t_{CK} |
| DQS read postamble | t_{RPST} | 0.4 | 0.6 | 0.4 | 0.6 | 0.4 | 0.6 | t_{CK} |
| ACTIVE bank a to ACTIVE bank b command | t_{RRD} | 10 | | 12 | | 15 | | ns |
| DQS write preamble | t_{WPRE} | 0.25 | | 0.25 | | 0.25 | | t_{CK} |
| DQS write preamble setup time | t_{WPRES} | 0 | | 0 | | 0 | | ns |
| DQS write postamble | t_{WPST} | 0.4 | 0.6 | 0.4 | 0.6 | 0.4 | 0.6 | t_{CK} |
| Write recovery time | t_{WR} | 15 | | 15 | | 15 | | ns |
| Internal WRITE to READ command delay | t_{WTR} | 2 | | 1 | | 1 | | t_{CK} |
| Data valid output window | na | $t_{QH} - t_{DQSQ}$ | | $t_{QH} - t_{DQSQ}$ | | $t_{QH} - t_{DQSQ}$ | | ns |
| REFRESH to REFRESH command interval | t_{REFC} | | 70.3 | | 70.3 | | 70.3 | μs |
| Average periodic refresh interval | t_{REFI} | | 7.8 | | 7.8 | | 7.8 | μs |
| Terminating voltage delay to V_{DD} | t_{VTD} | 0 | | 0 | | 0 | | ns |
| Exit SELF REFRESH to non-READ command | t_{XSNR} | 70 | | 75 | | 75 | | ns |
| Exit SELF REFRESH to READ command | t_{XSRD} | 200 | | 200 | | 200 | | t_{CK} |

Note 1: Values for AC timing, IDD, and electrical AC and DC characteristics might have been collected within the standard temperature range and at nominal reference/supply voltage levels, but the related specifications and device operation are guaranteed for the full voltage range specified and for the corresponding field of operation according to the actual temperature grade of the module (extended E, I or W; refer to the environmental conditions for more details).


SERIAL PRESENCE-DETECT MATRIX

| BYTE | DESCRIPTION | 3200-3033 | 2700-2533 | 2100-2533 |
|------|--|-----------|-----------|-----------|
| 0 | NUMBER OF SPD BYTES USED | | 0x80 | |
| 1 | TOTAL NUMBER OF BYTES IN SPD DEVICE | | 0x08 | |
| 2 | FUNDAMENTAL MEMORY TYPE | | 0x07 | |
| 3 | NUMBER OF ROW ADDRESSES ON ASSEMBLY | | 0x0d | |
| 4 | NUMBER OF COLUMN ADDRESSES ON ASSEMBLY | | 0x0b | |
| 5 | NUMBER OF PHYSICAL BANKS ON DIMM | | 0x01 | |
| 6 | MODULE DATA WIDTH | | 0x40 | |
| 7 | MODULE DATA WIDTH (continued) | | 0x00 | |
| 8 | MODULE VOLTAGE INTERFACE LEVELS (V _{DDQ}) | | 0x04 | |
| 9 | SDRAM CYCLE TIME, (t _{CK}) (CAS LATENCY =2.5 (2700, 2100) ; CL=3* (3200)) | 0x50 | 0x60 | 0x75 |
| 10 | SDRAM ACCESS FROM CLOCK, (t _{AC}) (CAS LATENCY =2.5 (2700, 2100); CL=3* (3200)) | 0x70 | 0x70 | 0x75 |
| 11 | MODULE CONFIGURATION TYPE | | 0x00 | |
| 12 | REFRESH RATE/ TYPE | | 0x82 | |
| 13 | SDRAM DEVICE WIDTH (PRIMARY SDRAM) | | 0x08 | |
| 14 | ERROR- CHECKING SDRAM DATA WIDTH | | 0x00 | |
| 15 | MINIMUM CLOCK DELAY, BACK- TO- BACK RANDOM COLUMN ACCESS | | 0x01 | |
| 16 | BURST LENGTHS SUPPORTED | | 0x0e | |
| 17 | NUMBER OF BANKS ON SDRAM DEVICE | | 0x04 | |
| 18 | CAS LATENCIES SUPPORTED | 0x1c | 0x0c | 0x0c |
| 19 | CS LATENCY | | 0x01 | |
| 20 | WE LATENCY | | 0x02 | |
| 21 | SDRAM MODULE ATTRIBUTES | | 0x20 | |
| 22 | SDRAM DEVICE ATTRIBUTES: GENERAL | | 0xc0 | |
| 23 | SDRAM CYCLE TIME, (t _{CK}) (CAS LATENCY=2(2700, 2100) CL=2,5*(3200)) | 0x60 | 0x75 | 0xa0 |
| 24 | SDRAM ACCESS FROM CK, (t _{AC}) (CAS LATENCY=2(2700, 2100) CL=2.5*(3200)) | 0x70 | 0x70 | 0x75 |
| 25 | SDRAM CYCLE TIME, (t _{CK}) (CAS LATENCY=1.5(2700, 2100) CL=2*(3200)) | 0x75 | 0x00 | 0x00 |
| 26 | SDRAM ACCESS FROM CK, (t _{AC}) (CAS LATENCY=1.5(2700, 2100) CL=2*(3200)) | 0x75 | 0x00 | 0x00 |
| 27 | MINIMUM ROW PRECHARGE TIME, (t _{RP}) | 0x3c | 0x48 | 0x50 |
| 28 | MINIMUM ROW ACTIVE TO ROW ACTIVE, (t _{RRD}) | 0x28 | 0x30 | 0x3c |
| 29 | MINIMUM RAS# TO CAS# DELAY, (t _{RCD}) | 0x3c | 0x48 | 0x50 |
| 30 | MINIMUM RAS# PULSE WIDTH, (t _{RAS}) | 0x28 | 0x2a | 0x2d |
| 31 | MODULE BANK DENSITY | | 0x80 | |

SERIAL PRESENCE-DETECT MATRIX (continued)

| BYTE | DESCRIPTION | 3200-3033 | 2700-2533 | 2100-2533 |
|--------|---|-----------|----------------------|-----------|
| 32 | ADDRESS AND COMMAND SETUP TIME, (t _{IS}) | 0x60 | 0x80 | 0xa0 |
| 33 | ADDRESS AND COOMAND HOLD TIME, (t _{IH}) | 0x60 | 0x80 | 0xa0 |
| 34 | DATA/DATA MASK INPUT SETUP TIME, (t _{DS}) | 0x40 | 0x45 | 0x50 |
| 35 | DATA/DATA MASK INPUT HOLD TIME, (t _{DH}) | 0x40 | 0x45 | 0x50 |
| 36-40 | RESERVED | 0x00 | 0x00 | 0x00 |
| 41 | MIN ACTIVE AUTO REFRESH TIME (t _{RC}) | 0x37 | 0x3c | 0x46 |
| 42 | MINIMUM AUTO REFRESH TO ACTIVE/ AUTO REFRESH COMMAND PERIOD, (t _{RFC}) | 0x46 | 0x48 | 0x46 |
| 43 | SDRAM DEVICE MAX CYCLE TIME (t _{CKMAX}) | 0x30 | 0x30 | 0x30 |
| 44 | SDRAM DEVICE MAX DQS-DQ SKEW TIME (t _{DQSQ}) | 0x28 | 0x2d | 0x3c |
| 45 | SDRAM DEVICE MAX READ DATA HOLD SKEW FACTOR (t _{QHS}) | 0x50 | 0x60 | 0xa0 |
| 46-61 | RESERVED | | 0x00 | |
| 62 | SPD REVISION | | 0x11 | |
| 63 | CHECKSUM FOR BYTES 0-62 | 0x0F | 0xC2 | 0xD8 |
| 64 | MANUFACTURER`S JEDEC ID CODE | | 7F | |
| 65 | MANUFACTURER`S JEDEC ID CODE | | 7F | |
| 66 | MANUFACTURER`S JEDEC ID CODE | | 7F | |
| 67 | MANUFACTURER`S JEDEC ID CODE (continued) | | DA | |
| 72 | MANUFACTURING LOCATION | | x | |
| 73-90 | MODULE PART NUMBER (ASCII) | | "SDU06464B5B61MT-xx" | |
| 91 | PCB IDENTIFICATION CODE | | x | |
| 92 | IDENTIFICATION CODE (continued) | | x | |
| 93 | YEAR OF MANUFACTURE IN BCD | | x | |
| 94 | WEEK OF MANUFACTURE IN BCD | | x | |
| 95-98 | MODULE SERIAL NUMBER | x | x | x |
| 99-127 | MANUFACTURER-SPECIFIC DATA (RSVD) | | | |

Part Number Code

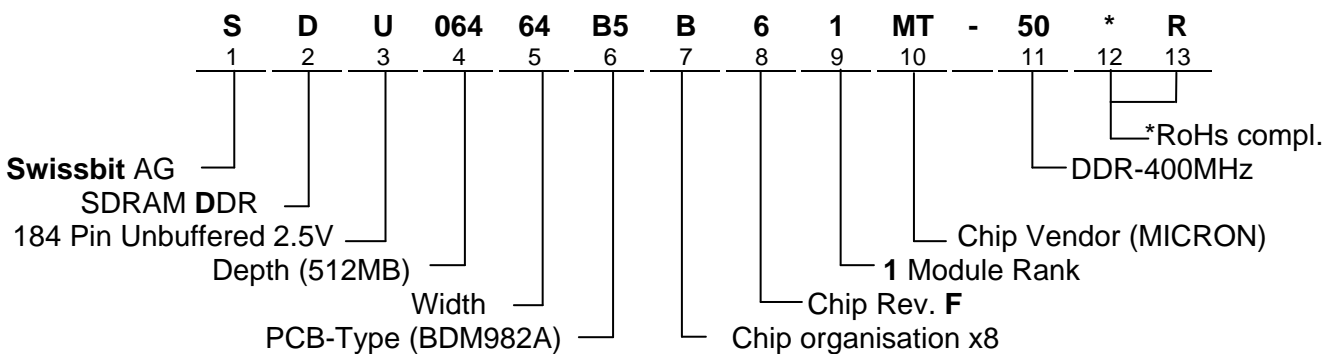

* optional / additional information

Locations**Swissbit AG**

Industriestrasse 4 – 8
CH – 9552 Bronschhofen
Switzerland
Phone: +41 (0)71 913 72 66
Fax: +41 (0)71 913 74 50

Swissbit Germany GmbH

Wolfener Strasse 36
D – 12681 Berlin
Germany
Phone: +49 (0)30 93 69 54 – 0
Fax: +49 (0)30 93 69 54 – 55

Swissbit NA, Inc.

18 Willett Avenue, Suite 203
Port Chester, NY 10573
USA
Phone: +1 914 935 1400
Fax: +1 914 935 9865

Swissbit NA, Inc.

7801 North Lamar Boulevard, Suite E – 186
Austin, TX 78752
USA
Phone: +1 512 302 9001
Fax: +1 512 302 4808