


SWIVEL CASTERS

SWIVEL CASTERS

CASBRWSW,CASERSW,CASPPSW,
CASPUWSW,CASNYSW

- Light & Medium duty housing: Zinc-Plated Steel
- Heavy duty housing: Solid Steel welded construction

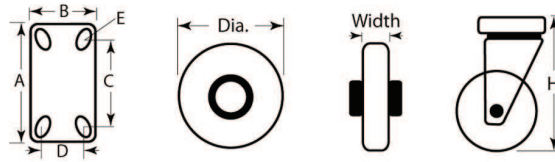

Standard Pack: 4 per bag												
Part No.	Material	Approx. Load Capacity Lbs.	Duty	Nominal Ø	Wheel Width	"H" Overall Height	"A"	"B"	"C"	"D"	"E" Bolt Hole	Wheel Bearing
CASBRWSW05A	Black Rubber	88	Light	3.0 (76.2)	.90 (22.9)	3.81 (96.8)	3.30 (83.8)	2.83 (71.9)	2.44 (62)	1.96 (49.8)	.43 X .33 (10.9 X 8.4)	Roller Bearing
CASBRWSW10A		132	Light	4.0 (101.6)	1.06(26.9)	5.11 (129.8)	4.01 (101.9)	3.30 (83.8)	3.14 (79.8)	2.36 (59.9)	.55 X .35 (13.8 X 8.9)	
CASBRWSW15A		220	Medium	5.0 (127)	1.33 (33.8)	6.10 (154.9)	4.01 (101.9)	3.30 (83.8)	3.14 (79.8)	2.36 (59.9)	.55 X .35 (13.8 X 8.9)	
CASERSW05A	Elastic Rubber	88	Light	3.0 (76.2)	1.29 (32.8)	4.09 (32.8)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	Roller Bearing
CASERSW10A		132	Light	4.0 (101.6)	1.29 (32.8)	5.19 (103.9)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	
CASERSW15A		220	Medium	5.0 (127)	1.33 (33.8)	6.22 (158)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	
CASPPSW05A	Plastic Low Profile	154	Medium	2.0 (50.8)	.90 (22.9)	2.48 (63)	2.63 (66.8)	1.88 (47.8)	2.12 (53.8)	.94 (23.9)	Ø.24 (6.1)	Plain
CASPPSW10A		165	Medium	2.5 (63.5)	.86 (63.5)	3.30 (21.8)	3.74 (95)	2.75 (69.9)	2.99 (75.9)	1.75 (75.9)	Ø.35 (8.9)	
CASPUSW05A		176	Medium	3.0 (76.2)	1.25 (31.8)	4.09 (103.9)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	Precision Ball Bearing
CASPUSW10A	Polyurethane	264	Medium	4.0 (101.6)	1.25 (31.8)	5.19 (131.8)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	
CASPUSW15A		330	Medium	5.0 (127)	1.25 (31.8)	6.22 (158)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	
CASPUSW25A		308	Heavy	4.0 (101.6)	1.96 (49.8)	5.59 (142)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	Steel Roller Bearing
CASPUSW30A	Nylon	440	Heavy	5.0 (127)	1.96 (49.8)	6.45 (163.8)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	
CASPUSW35A		485	Heavy	6.0 (152.4)	1.96 (49.8)	7.48 (190)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	
CASNYSW05A	Nylon	176	Medium	3.0 (76.2)	.98 (24.9)	3.70 (93.9)	2.75 (69.9)	2.28 (57.9)	2.16 (54.9)	1.65 (41.9)	Ø.33 (8.4)	Plain
CASNYSW10A		220	Medium	4.0 (101.6)	1.06 (26.9)	4.76 (120.9)	3.93 (99.8)	2.28 (57.9)	3.22 (81.8)	1.57 (39.9)	Ø.33 (8.4)	
CASNYSW25A		661	Heavy	4.0 (101.6)	1.96 (49.8)	5.59 (142)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	Precision Double Ball Bearing
CASNYSW30A		881	Heavy	5.0 (127)	1.96 (49.8)	6.45 (163.8)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	
CASNYSW35A		1102	Heavy	6.0 (152.4)	1.96 (49.8)	7.48 (190)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	