



2-Electrode Gas Tube Arrester

UN2E5-600LL

φ 5.5×6

5KA

Dimension

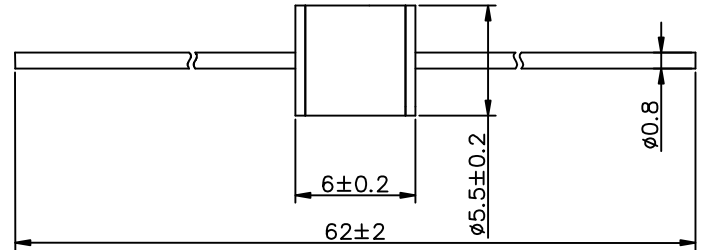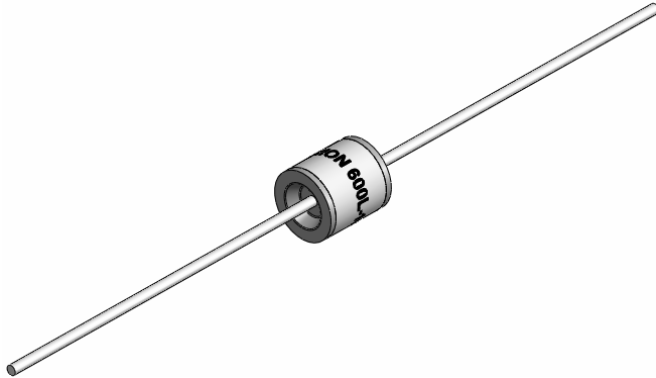

Unit:mm

Nickel-plated

Electrical Specifications

DC Spark-over Voltage at 100V/S	600±20%	V
Impulse Spark-over Voltage at 100V/μs	<1100	V
at 1KV/μs	<1200	V
Life:		
Impulse Discharge current 8/20μs (±5 times)	5	KA
10/1000μs (300 times)	100	A
AC Discharge current (1S,5times interval 3 minutes)	5	A
Insulation resistance at DC 100V	>1000	MΩ
Electrode Capacitance at 1MHz	<1.0	pF
Arc Voltage at 1A	~25	V
Glow Voltage at 1mA	~70	V
Holdover Voltage at 100mA, <150mS	150	V
Weight	~0.9	g
Operation and storage Temperature	-40~+90	°C

Applications

- u AC power line protection
- u Cable TV / Coaxial cable protection
- u Power supply
- u Consumer electronics

Feature

- u Non-Radioactive
- u RoHS Compliant
- u LOW Capacitance
- u High insulation resistance
- u Fast response-time
- u Small size

Marking, Black

UNION 600L-YY
 600 -Nominal voltage
 L -5KA
 YY -Year of production

Notes:

1. Terms in accordance with ITU-T K.12 and GB/T 9043-2008
2. At delivery AQL 0.65 level II, DIN ISO 2859
3. After life test:
 DC Spark-over Voltage at 100V/S : 600±30%
 Impulse Spark-over Voltage at 1KV/μs<1300V