



2-Electrode Gas Tube Arrester

UN2E5-250LL

φ 5.5×6

5KA

Dimension

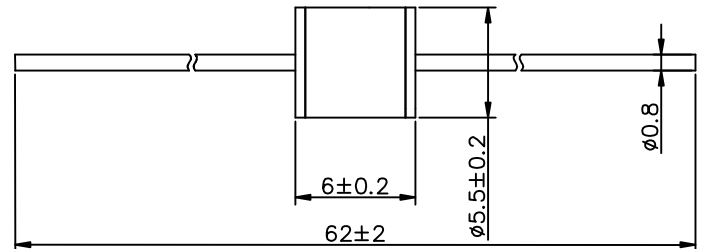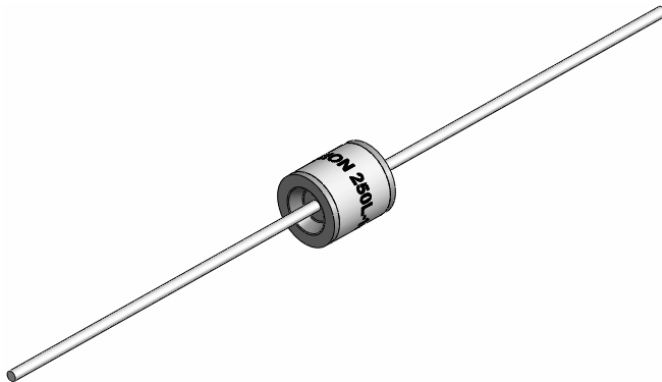

Unit:mm

Nickel-plated

Electrical Specifications			Applications	
DC Spark-over Voltage at 100V/S	250±20%	V	<ul style="list-style-type: none"> u Branch exchange(MDF) u Date/Single line protection u Cable TV / Coaxial cable protection u Subscriber protection u Ararm system protecion u Consumer electronis 	
Impulse Spark-over Voltage at 100V/μs at 1KV/μs	<600	V		
	<700	V		
Life: Impulse Discharge current 8/20μs (±5 times) 10/1000μs (300 times) AC Discharge current (1S,5times interval 3 minutes)	5	KA		
	100	A		
	5	A		
Insulation resistance at DC 100V	>1000	MΩ		Feature <ul style="list-style-type: none"> u Non-Radioactive u RoHS Compliant u LOW Capacitance u High insulation resistance u Fast response-time u Small size
Electrode Capacitance at 1MHz	<1.0	pF		
Arc Voltage at 1A	~25	V		
Glow Voltage at 1mA	~70	V		
Holdover Voltage at 100mA, <150mS	135	V		
Weight	~0.9	g		
Operation and storage Temperature	-40~+90	°C		
Marking, Black	UNION 250L-YY			
	250 -Nominal voltage			
	L -5KA			
		YY -Year of production		

Notes:

1. Terms in accordance with ITU-T K.12 and GB/T 9043-2008
2. At delivery AQL 0.65 level II , DIN ISO 2859
3. After life test:
DC Spark-over Voltage at 100V/S : 250±30%
Impulse Spark-over Voltage at 1KV/μs<800V