


CFK21 Series 32.768KHz

2.0X1.2X0.6mm
SMD
RoHS Compliant

Mechanical Dimensions

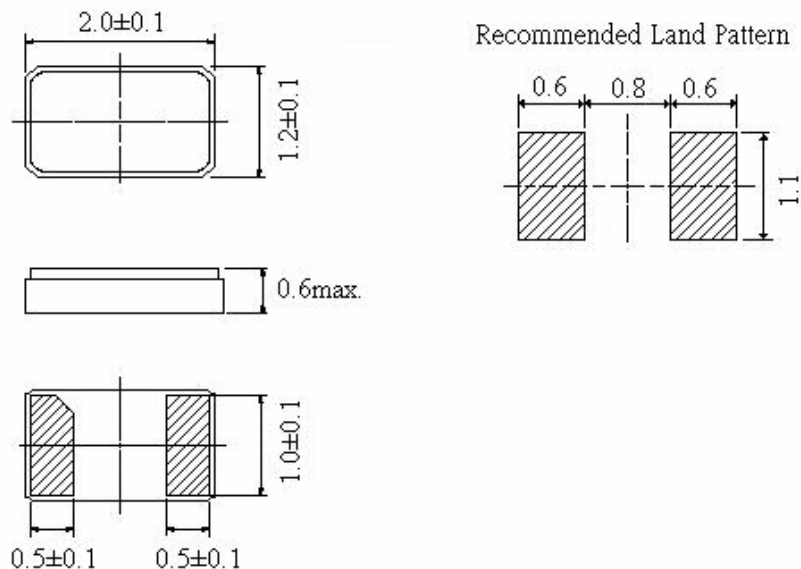

Electrical Specifications

Frequency Range		32.768KHz
Operating Temperature Range		-10° to 60°C or -40° to 85°C
Storage Temperature Range		-55°C to 95°C
Aging		±3ppm / Year Max
Shunt Capacitance		2.0pF Max
Insulation Resistance		500 MΩ//DC 100V
Equivalent Series Resistance		80KΩ Max
Temperature Characteristics Turnover Temperature Parabolic Curvature Constant		25°C ± 5°C -0.045x10 ⁻⁶ /C ² Max

Part Numbering Guide

