

PA14-08-1-1603-6 Data Sheet

14 pin SO socket/8 pin DIP 0.6" plug

Supported Device/Footprints


This adapter allows programming of several SO devices in their DIP footprint. A partial list is:

National/Fairchild: NM93C56/ C66 in M14A package.
Xicor: X24C16 in 14 pin SO package.

Footprint: Same device 8 pin DIP 0.6" span

Device Dimensions


This socket can accept devices of the following dimensions:

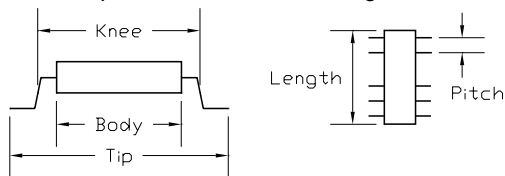

Body mm (inches)			Knee mm (inches)		
min.	typ.	max.	min.	typ.	max.
n/a	3.9	4.0	n/a	5.0	5.2
	(0.153)	(0.157)		(0.197)	(0.205)

Tip mm (inches)			Body Length	Lead Pitch
min.	typ.	max.	n/a	1.27
5.8	6.0	6.35		(0.050)
(0.228)	(0.236)	(0.250)		

Adapter Dimensions

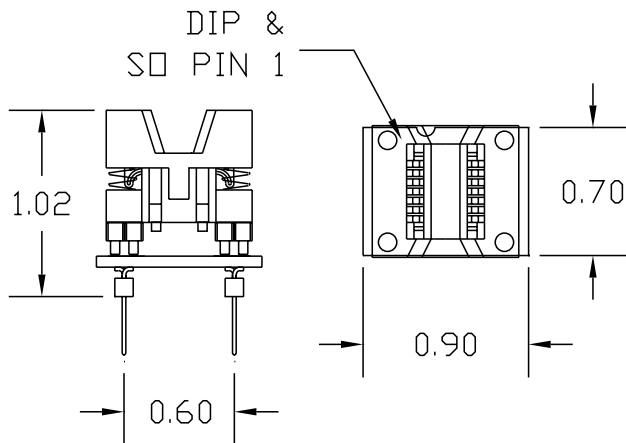

Adapter Parts & Part Numbers

The following chart shows the various socket and board part numbers that make up this adapter.

Adapter	Socket	Board	DIP Plug
PA14-08-1-1603-6	14(16)SD-03	14SO03-8-1	0.6"

Adapter Construction

The adapter is made up of 2 sub-assemblies. They assemble via connectors making the adapter modular. This way the sub-assemblies can be replaced easily.

When disassembling the adapter take care not to bend the pins. When reassembling the adapter note the pin 1 indicators to align the parts correctly.

Test Socket

LSC #	Style	Mfgr/Pn
14(16)SD-03	Open Top ZIF	Enplas OTS-14(16)-1.27-03

The 14 pin socket is depopulated from 16 pins to fit the devices. The part numbers are listed in the previous chart. The sockets are removable so that they may be replaced. They are depopulated at the Pin 1 end. If you remove the socket be sure to replace it with the correct orientation and alignment.

Wiring

The following chart shows the adapter's wiring.

SO	DIP
1	NC
2	1
3	2
4	NC
5	3
6	4
7	NC
8	NC
9	5
10	6
11	NC
12	7
13	8
14	NC



Logical Systems Corporation
 PO Box 6184, Syracuse, NY 13217-6184 USA
 Tel (315) 478-0722 FAX (315) 479-6753
 S Y S T E M S www.logicalsyst.com, Email: info@logicalsyst.com

PA14-08-1-1603-6Data Sheet
 Doc: 14SD038D.DOC
 Rev 11/27/00
 Page 1 of 1