




Feature

- Stylish and compact design to fit mission critical application
- VGA, DVI, dual independent display support, enable E-Map and monitor function at the same time
- Support SD flash board to enhance system security
- Remote control support

SPECIFICATION

Platform	
CPU	Intel® socket 478 Pentium® 4 or Celeron® processor
Chipset	Intel® 852GME
Memory	Up to 2GB DDR2 266/200 SDRAM on two 184-pin DIMM sockets, ECC support
BIOS	Award
SSD	N/A
Storage Device	1 Swappable HDD
Expansion	2 PCI slot
RAID Function	N/A
Operating Temperature	0 to 40°C
Color	Silver
Dimension	440 (W) x 250 (D) x 72 (H)mm
Optional	SD flash board; RS-485 board; Remote Control
I/O	
MIO	RS-232 x2 and optional RS-485
Ethernet	10BASE-T/100BASE-TX
Audio	AC '97 2.2
Keyboard/Mouse	PS/2
GPIO	4GP In, 2GP Out (Optional)
USB	USB2.0 x2

■ PVS-1125 Drawing

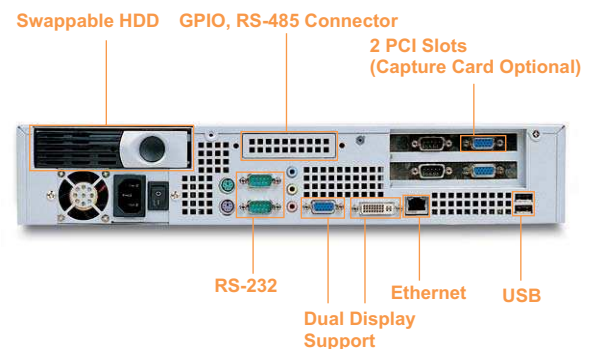

Display	
Chipset	Intel® 850GME GMCH
Display Memory	Up to 64MB shared DDR memory (DVMT)
Interface	VGA, DVI, dual display support