

iMcV-T1/E1/J1 products are ideal for extending PBX or legacy Telco circuits over fiber optics in the local loop and long-haul applications.



* Module shown in MediaChassis/1-AC, sold separately

Switch Selectable Protocol

- Operates at T1 (1.544), E1 (2.048) and J1 (1.544) protocols

Remote management

- Conduct loopback tests,
- Monitor/manage units via GUI-Based iView²
- Full bit rate for customer traffic

Easy to configure and manage with GUI-based iView²

- Up and running in less than five minutes
- Easily adjust settings when user requirements change
- Easy upgrades; no user intervention or visits to remote locations required
- Monitor and control all connections

Supports more fiber choices

- Available for multi-mode or single-mode fiber
- Single-strand fiber versions
- Supports very long fiber distances

Eases Troubleshooting

- Three loopback testing modes, plus SNMP management and LEDs assist in diagnosing problems on fiber optic networks

The iMcV-T1/E1/J1 modules are physical layer devices that convert twisted pair to fiber and operate at a switch-selectable protocol rate of T1 (1.544), E1 (2.048) and the Japanese J1 (1.544). The iMcV-T1/E1/J1 modules offer more fiber choices and distances because they are engineered to the industry standard 8B/10B PHY encoding.

Available with remote management via the fiber port, the SNMP-manageable iMcV-T1/E1/J1 enables network managers to conduct loopback testing, and monitor and manage units located up to 100 km away at a remote location.

Full bit rate for customer traffic

Since IMC Networks' management technology functions transparently to the frame format, customers will not experience overhead or loss of a data channel typically associated with remote management or SNMP polling. Customer traffic will always be full bit rate: 1.544 Mbps or 2.048 Mbps.


iMcV-T1/E1/J1 products include:

- A line integrity test feature
- Three modes of operation for loopback testing (local, remote and analog loopback)
- The Transmit Data Source diagnostic feature which sends specific patterns of data (transmit all unframed ones; transmit a pattern of zeros, and ones and transmit a Pseudorandom Bit Sequence (PRBS) to determine problems with the cable.

Configure all test modes remotely via iView² SNMP software or locally by manually setting DIP Switches on the units. In addition, iMcV-T1/E1/J1 also includes an internal elastic buffer to remove jitter from transmitted data.

Application Example

iMcV-T1/E1/J1 media converters allow users to link two PBXs, CSUs or routers and extend the distance between the two over fiber.

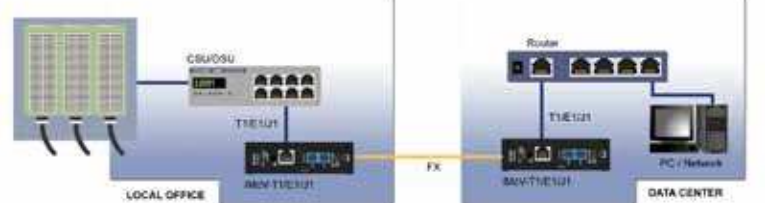

T1/E1/J1

Technical Specifications

- Protocol-Selectable — Operates at T1/J1 (1.544) and E1 (2.048) protocols
- Includes ability to manage remote unit
- Conduct three types of loopback tests
- Full bit rate for customer traffic
- EGL, Transmit Data Source, Line Encoding and NRZ
- Includes DTE/DCE switch on converter
- Features LinkLoss and FiberAlert
- Installs in any iMediaChassis series or MediaChassis series
- Supports GUI-Based iView²
- 50/125µm or 62.5/125µm multi-mode fiber
- 9/125µm single-mode fiber
- Available for single-strand fiber
- Connectors: RJ-48 and ST or SC
- Includes diagnostic LEDs
- Includes hot-swappable architecture

Regulatory Approvals:

- FCC Class A
- UL/cUL
- CSA
- CE

Shipping Weight:

0.30 lbs (.11 kg)

Operating Temperature:

+32° to +122° F (0° to +50° C); 5% to 95% (non-condensing), 0 – 10,000 ft. altitude

Storage Temperature:

-13° to +158° F (-25° to +70° C); 5% to 95% (non-condensing)

Fiber Optics Specifications

For each product listed below in the Ordering Information section, the DISTANCE represents an approximate fiber distance based on industry-standard fiber attenuation specifications. Actual distances will vary for each installation. For complete power budgets and information on calculating specific distances, visit www.imcnetworks.com/go/fcs or contact IMC Networks Fiber Consulting Services at 949-465-3000.

Ordering Information

Always deploy *iMcV-T1/E1/J1* converters in pairs.

PART NUMBER	DESCRIPTION	DISTANCE
iMcV-T1/E1/J1 Module		
850-14198	iMcV-T1/E1/J1, TP/Fiber-MM850-ST	2 km
850-14199	iMcV-T1/E1/J1, TP/Fiber-MM850-SC	2 km
850-14200	iMcV-T1/E1/J1, TP/Fiber-MM1300-ST	5 km
850-14201	iMcV-T1/E1/J1, TP/Fiber-MM1300-SC	5 km
850-14202	iMcV-T1/E1/J1, TP/Fiber-SM1310/PLUS-ST	40 km
850-14203	iMcV-T1/E1/J1, TP/Fiber-SM1310/PLUS-SC	40 km
850-14204	iMcV-T1/E1/J1, TP/Fiber-SM1310/LONG-ST	80 km
850-14205	iMcV-T1/E1/J1, TP/Fiber-SM1310/LONG-SC	80 km
850-14206	iMcV-T1/E1/J1, TP/Fiber-SM1550/LONG-SC	80 km
iMcV-T1/E1/J1 Single-Strand Fiber Module*		
850-14288	iMcV-T1/E1/J1, TP/SSFiber, MM1310-SC	2 km
850-14289	iMcV-T1/E1/J1, TP/SSFiber, MM1550-SC	2 km
850-14290	iMcV-T1/E1/J1, TP/SSFiber-SM1310-SC	20 km
850-14291	iMcV-T1/E1/J1, TP/SSFiber-SM1550-SC	20 km
850-14292	iMcV-T1/E1/J1, TP/SSFiber-SM1310/PLUS-SC	40 km
850-14293	iMcV-T1/E1/J1, TP/SSFiber-SM1550/PLUS-SC	40 km
850-14294	iMcV-T1/E1/J1, TP/SSFiber-SM1310/LONG-SC	60 km
850-14295	iMcV-T1/E1/J1, TP/SSFiber-SM1550/LONG-SC	60 km

*These products have single-strand fiber technology.

For more information go to: www.imcnetworks.com/products/SSFx.cfm

PART NUMBER	DESCRIPTION	DISTANCE
iMcV-T1/E1/J1 CWDM Fiber Module		
850-14271	iMcV-T1/E1/J1, TP/Fiber-CWDM-SM1310-SC	80 km
850-14272	iMcV-T1/E1/J1, TP/Fiber-CWDM-SM1330-SC	80 km
850-14273	iMcV-T1/E1/J1, TP/Fiber-CWDM-SM1350-SC	80 km
850-14277	iMcV-T1/E1/J1, TP/Fiber-CWDM-SM1370-SC	80 km
850-14278	iMcV-T1/E1/J1, TP/Fiber-CWDM-SM1390-SC	80 km
850-14279	iMcV-T1/E1/J1, TP/Fiber-CWDM-SM1410-SC	80 km
850-14281	iMcV-T1/E1/J1, TP/Fiber-CWDM-SM1430-SC	80 km
850-14283	iMcV-T1/E1/J1, TP/Fiber-CWDM-SM1450-SC	80 km
850-14284	iMcV-T1/E1/J1, TP/Fiber-CWDM-SM1470-SC	80 km
850-14285	iMcV-T1/E1/J1, TP/Fiber-CWDM-SM1490-SC	80 km
850-14286	iMcV-T1/E1/J1, TP/Fiber-CWDM-SM1510-SC	80 km
850-14287	iMcV-T1/E1/J1, TP/Fiber-CWDM-SM1530-SC	80 km
850-14296	iMcV-T1/E1/J1, TP/Fiber-CWDM-SM1550-SC	80 km
850-14297	iMcV-T1/E1/J1, TP/Fiber-CWDM-SM1570-SC	80 km
850-14298	iMcV-T1/E1/J1, TP/Fiber-CWDM-SM1590-SC	80 km
850-14299	iMcV-T1/E1/J1, TP/Fiber-CWDM-SM1610-SC	80 km



IMC Networks
Headquarters
 19772 Pauling
 Foothill Ranch, CA 92610
 TEL: 949-465-3000
 FAX: 949-465-3020
sales@imcnetworks.com

IMC Networks
Europe
 Herseltsesteenweg 268
 B-3200 Aarschot, Belgium
 TEL: +32-16-550880
 FAX: +32-16-550888
eurosales@imcnetworks.com

IMC Networks
Eastern US/Latin America
 28050 U.S. Hwy. 19 North, Suite 306
 Clearwater, FL 33761
 TEL: 727-797-0300
 FAX: 727-797-0331
latinsales@imcnetworks.com

IMC Networks
Fiber Consulting Services
 For information call:
 TEL: 949-465-3000
 1-800-624-1070 (US/CAN)
 +32-16-550880 (Europe)
fcs@imcnetworks.com

Copyright © 2010 IMC Networks. All rights reserved. The information in this document is subject to change without notice. IMC Networks assumes no responsibility for any errors that may appear in this document. Specific product names may be trademarks or registered trademarks and are the property of their respective companies.