


The **ANT-OD58-32** parabolic dish antenna system is constructed of an aluminum alloy dish with a powder coat paint finish for excellent mechanical, electrical and environmental performance. The parabolic reflector is made with a special one-step molding technology which achieves excellent consistency and long term stability. It comes complete with universal galvanized steel, powder coat paint mounting system for pole mount applications. Because of its superb electrical performance and mechanical stability, the parabolic dish antenna can be used in a wide variety of high performance 5GHz wireless applications.

702-W / 702M12-W APPLICATIONS

- Wireless LAN applications
- 802.11a wireless systems
- Base Station antenna

SPECIFICATIONS

| | |
|---------------------------|-------------------|
| Frequency Range: | 5470-5850 MHz |
| Gain: | 32 dBi |
| Input Return Loss (S11): | -14dBi |
| VSWR: | 1.5:1 typical |
| 3dB Beam Angle: | 4 deg |
| Cross Pole: | -34dB |
| Front to Back: | 38dB |
| Side Lobe: | -30dB |
| Impedance: | 50 ohms |
| Input Power: | 100 Watts |
| Operating Temperature: | -40° to 70° C |
| Pole Size (diameter): | 1 to 3 inches |
| Weight: | 22 lbs (10kg) |
| Dimensions (diameter): | 35.4" (900mm) |
| Rated Wind Velocity: | 125mph (56 M/sec) |
| Wind Loading: | |
| 100 mph: | 256 lbs |
| 125 mph: | 400 lbs |
| 100 mph w, 1/2 radial ice | 258 lbs |

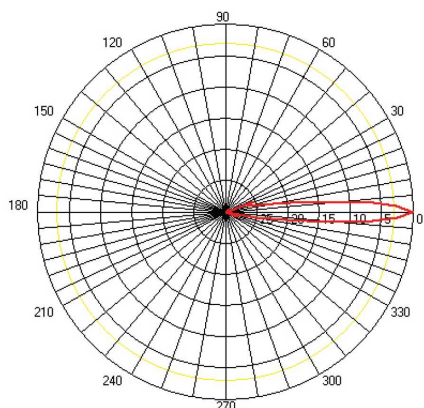

EPlane - Vertical / Elevation



Secure online ordering 24/7/365 from
B & B electronics
 MANUFACTURING COMPANY
www.bb-electronics.com


Range Estimates*

| | | |
|---------------------------|--------------|--------------|
| Throughput | 26Mbps | 100Mbps |
| Distance (Miles) | 36.74 | 14.63 |
| Distance (kilometers) | 59.12 | 23.53 |
| Tx Power | 20dBm | 15dBm |
| Receive Sensitivity | -87dBm | -76dBm |
| Number of Spatial Streams | 1 | 2 |

*Given the following parameters:

- Free Space loss / 2-ray ground reflection models
- Antenna is used with an **N-TRON 702-W** or **702M12-W** Ethernet Radio mounted at base level.
- Antenna height: 25ft (7.6 meters) above ground
- Clear line of sight between antennas with no obstructions of the first Fresnel Zone
- 25 feet of **N-TRON ANT-CAB-400** series antenna cable for antenna to Radio connection
- 20MHz wide signal
- Center frequency = 5.80GHz
- 10dB loss assumed for weather conditions

Range estimates are theoretical. Actual results may vary based on installation conditions. A site survey should be performed as part of the planning process to determine the presence of RF interference and identify optimum installation locations for access points and antennas.

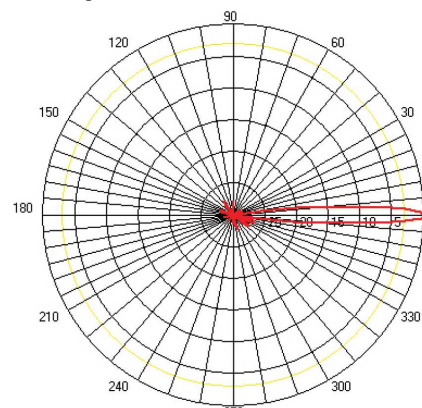

HPlane - Horizontal / Azimuth

REV 090810