



SSPA AWMA-K 4200-G series
SSPB (BUC) SSPBM-K 4200-G series



Features


- Full range of output power of 300W or 400W in a single package
- High linearity
- Redundant ready with no external controller
- Full M&C capability via RS232, RS485 or Ethernet port
- Built-in Forward and Reflected precision power metering
- Output RF calibrated Sample Port
- Redundant Systems shipped fully tested
- Infinite VSWR protection with automatic high reflected power shutdown
- Weatherproof construction
- CE marking

Options

- 1:1 or 1:2 Redundant configuration
- L-Band input (SSPB/BUC operation)
- Internal/External reference with auto-sensing
- Ethernet port

Accessories

- Mounting kits
- Remote M&C panel with optional SNMP
- Handheld terminal
- Flexible and rigid waveguides
- Mounting frames

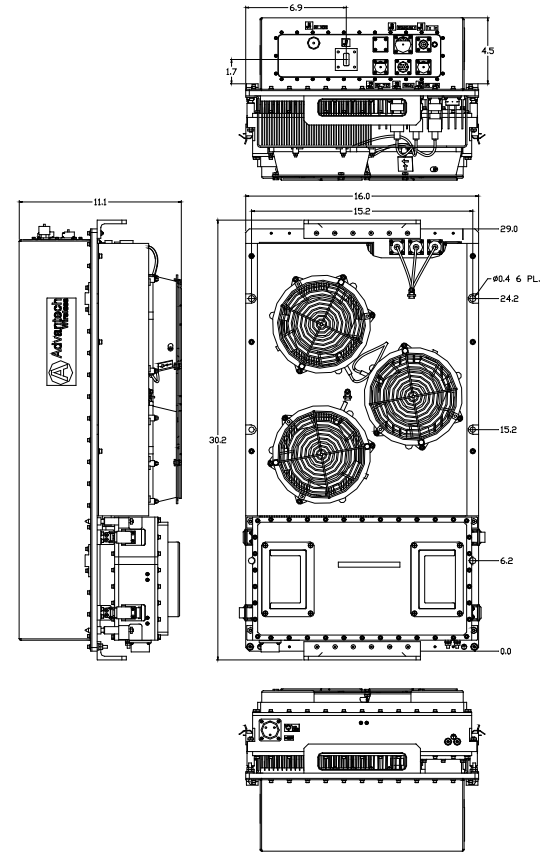

Overview

Based on GaN technology the new G-Series Ku-Band BUCs provide high power density in a compact size. Combined with the traditional Advantech Wireless features, these new series of BUCs provide the ultimate in performance and convenience.

300 - 400W Ku-Band Hubmount SapphireBlu™ SSPA/ SSPB

General Specifications

	KS	KX
Operating Frequency	14.0 – 14.5 GHz	13.75 – 14.5 GHz
L-Band input (BUC)	950 – 1450 MHz	950 – 1700 MHz
Output Power	300W	400W
P_{SAT} , typ	+55.0 dBm	+56.0 dBm
P_{LINEAR}	+51.0 dBm	+52.0 dBm
	P_{LINEAR} is the power at which the IMD specs are met and the spectral regrowth is <-30 dBc @ 1.0 x symbol rate for QPSK/OQPSK/8PSK modulation QPSK/OQPSK/8PSK modulation	
Gain	SSPA 68 ± 3 dB SSPB (BUC) 73 ± 3 dB	
Gain adjustment range	20 dB in 0.1 dB steps	
Gain flatness over full band	SSPA 2dB p-p max	SSPB (BUC) 4 dB p-p max
Gain slope over 40 MHz	± 0.3 dB max	SSPB (BUC) ± 0.5 dB max
Gain variation over temperature	± 1.5 dB max	
Input Impedance and VSWR	50 Ω SSPA 1.3:1	SSPB (BUC) 1.4:1
Output VSWR	1.25 : 1	
Noise power density	-80 dBm/Hz in Transmit Band, -150 dBm/Hz in Receive Band (10.95 GHz – 12.75 GHz)	
Spurious at P_{LINEAR} 1	SSPA: -65 dBc max SSPB (BUC): -55 dBc max	
Harmonics	-50 dBc @ P_{LINEAR}	
AM/PM conversion	<1.0 ^o /dB P_{LINEAR}	
Third order intermod (two tones)	-25 dBc two signal 5 MHz apart at P_{LINEAR}	
Group delay	Ripple 1 nsec p-p max over any 40 MHz band	
Residual AM Noise	0 – 10 kHz -45 dBc 10 kHz – 500 kHz -20 (1.25 + log F) dBc F = Frequency in kHz 500 kHz – 1 MHz -80 dBc	
SSPB (BUC)		
Local Oscillator freq.	13.05 GHz	12.8 GHz
Internal Reference frequency (optional)	10 MHz	
	Aging/day $\pm 2^{-10}$	
	Aging/year $\pm 5^{-8}$	
	Stability $\pm 2^{-8}$ over temp range	
Phase Noise	-53 dBc/Hz at 10Hz -63 dBc/Hz at 100Hz -73 dBc/Hz at 1000Hz	-83 dBc/Hz at 10 kHz -93 dBc/Hz at 100 kHz
External Reference Frequency phase noise (max)	10 MHz -120 dBc/Hz at 10Hz -135 dBc/Hz at 100Hz -150 dBc/Hz at 1000Hz	-155 dBc/Hz at 10 kHz -160 dBc/Hz at 100 kHz
Weight & Dimensions		
Dimensions	L x W x H 36.2" x 15.8" x 11.1" (920 x 401 x 282 mm)	
Weight	119 lbs (54 kg)	
AC input voltage	190 – 265 VAC (47-63 Hz)	
Power consumption	2400W at P_{LINEAR} 3200W at P_{SAT}	
Interfaces	Input (RF or L-Band) - N type female Output Sample Port - N type female RS485/Ethernet	AC line - MS3102 type RF output - WR75 Cover MS3112 type
Environmental	Temperature	Operating -30°C to +55 °C Option 1 -40°C to +55 °C Option 2 -50°C to +50 °C Storage -55°C to +85 °C
	Humidity	100% condensing
	Altitude	10,000' AMSL, derated by 2 °C/1000' from AMSL

NORTH AMERICA
USA
 Tel: +1 703 659 9796
 Fax: +1 703 635 2212
 info.usa@advantechwireless.com

CANADA
 Tel: +1 514 420 0045
 Fax: +1 514 420 0073
 info.canada@advantechwireless.com

EUROPE
UNITED KINGDOM
 Tel: +44 1480 357 600
 Fax: +44 1480 357 601
 info.uk@advantechwireless.com

RUSSIA & CIS
 Tel: +7 495 971 59 18
 info.russia@advantechwireless.com

INDIA
 Tel: +91 33 2415 5922
 info.india@advantechwireless.com

SOUTH AMERICA
 Tel: +1 514 420 0045
 Fax: +1 514 420 0073
 info.latam@advantechwireless.com

BRAZIL
 Tel: +55 11 3054 5701
 Fax: +55 11 3054 5701
 info.brazil@advantechwireless.com

An ISO 9001 : 2008 Company



Ref.: PB-AWMA-Ku-300-400-13231