




*150W to 250W  
SSPB 3200-G series  
AWMA 3200-G series*

MIL-STD-188-164 COMPLIANT

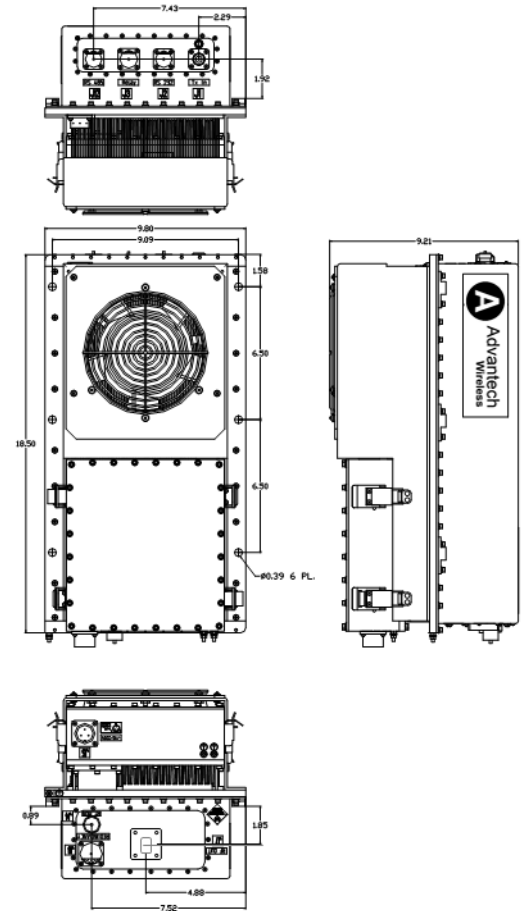

## Features

- Full range of output power of 150W, 200W and 250W in a single package
- SSPA or SSPB (BUC) option
- Super High linearity
- Redundant ready with no external controller
- Full M&C capability via RS232, RS485 or Ethernet port
- Built-in Forward and Reflected precision power metering
- Output RF calibrated Sample Port
- Redundant Systems shipped fully tested
- Infinite VSWR protection with automatic high reflected power shutdown
- Built-in 70 dB Receive Reject Filter
- Detachable power supply module
- Weatherproof construction
- CE marking

## Overview

Based on GaN technology the new G-Series Ku-Band BUCs provide highest possible power density and smallest size on the market. Combined with the traditional Advantech Wireless features, these new series of BUCs and SSPAs provide the ultimate in performance and convenience.

## Options

- 1:1 or 1:2 Redundant configuration
- L-Band input (SSPB/BUC operation)
- Internal/External reference with auto-sensing
- Ethernet port

## Accessories

- Mounting kits
- External Receive and Transmit Reject Filter
- Remote M&C panel with optional SNMP
- Handheld terminal
- Flexible and rigid waveguides
- Mounting frames
- High power terminations
- Replacement fans

# Ku-Band Hubmount SSPB SapphireBlu™ GaN

## General Specifications

	150W	200W	250W
Operating Frequency		KS 14.0 – 14.5 GHz KX 13.75 - 14.5 GHz	
L-Band input (BUC)		KS 950 – 1450 MHz KX 950 – 1700 MHz	
Output Power	P <sub>SAT</sub> (typical) P <sub>LINEAR</sub>	+52.0 dBm +48.0 dBm	+53.0 dBm +49.0 dBm
			+54.0 dBm +50.0 dBm
Gain	SSPA SSPB (BUC)	P <sub>LINEAR</sub> is the power at which the IMD specs are met and the spectral regrowth is <-30 dBc @ 1.0 x symbol rate for QPSK/OQPSK/8PSK modulation	
Gain adjustment range	62 ± 3 dB, Or optional 72 ± 3 dB 72 ± 3 dB		
Gain flatness over full band	20 dB in 0.1 dB steps		
Gain slope over 40 MHz	SSPA 2dB p-p max      SSPB (BUC) 4 dB p-p max		
Gain variation over temperature	± 0.3 dB max      SSPB (BUC) ± 0.5 dB max		
Input Impedance and VSWR	± 1.5 dB max		
Output VSWR	50 Ω      SSPA 1.3:1      SSPB (BUC) 1.4:1		
Noise power density	1.3:1		
Spurious at P <sub>LINEAR 1</sub>	-70 dBm/Hz in Transmit Band, -150 dBm/Hz in Receive Band (10.95 GHz – 12.75 GHz)		
Harmonics	SSPA: -65 dBc max      SSPB (BUC): -55 dBc max		
AM/PM conversion	<1 <sup>o</sup> /dB P <sub>LINEAR</sub>		
Third order IMD (two tones)	-25 dBc two signal 5 MHz apart at P <sub>LINEAR</sub>		
Group delay	Ripple      1 nsec p-p max over any 40 MHz band		
Residual AM Noise	0 – 10 kHz      -45 dBc 10 kHz – 500 kHz -20 (1.25 + log F) dBc      F = Frequency in kHz 500 kHz – 1 MHz -80 dBc		
<b>SSPB (BUC)</b>			
Local Oscillator freq.	KS      13.05 GHz	KX      12.8 GHz	
Internal Reference frequency (optional)	10 MHz	Aging/day      ±2 <sup>-10</sup> Aging/year      ±5 <sup>-8</sup> Stability      ±2 <sup>-8</sup> over temp range	
Max Phase Noise	-53 dBc/Hz at 10Hz -69 dBc/Hz at 100Hz -75 dBc/Hz at 1000Hz	-90 dBc/Hz at 10 kHz -105 dBc/Hz at 100 kHz	
External Reference Frequency phase noise (max)	10 MHz -120 dBc/Hz at 10Hz -135 dBc/Hz at 100Hz -150 dBc/Hz at 1000Hz	-155 dBc/Hz at 10 kHz -160 dBc/Hz at 100 kHz	
<b>Weight &amp; Dimensions</b>			
Dimensions	L x W x H 18.5" x 9.8" x 9.21" (470x254x229 mm)		
Weight	48 lbs (22 kg)		
AC input voltage	90 – 265 VAC (47-63 Hz)		
Power consumption at P Linear	800W	950W	1200W
Interfaces	Input (RF or L-Band) Output Sample Port RS485/Ethernet	N type female N type female MS3112 type	AC line MS3102 type RF output WR75 Cover
Environmental	Temperature	Operating -30°C to +55 °C Storage -55°C to +85 °C	Option 1 -40°C to +55 °C Option 2 -50°C to +65 °C
	Humidity	100% condensing	
	Altitude	10,000' AMSL, de-rated by 2 °C/1000' from AMSL	

**NORTH AMERICA**  
USA  
Tel: +1 703 659 9796  
Fax: +1 703 635 2212  
info.usa@advantechwireless.com

**CANADA**  
Tel: +1 514 420 0045  
Fax: +1 514 420 0073  
info.canada@advantechwireless.com

**EUROPE**  
UNITED KINGDOM  
Tel: +44 1480 357 600  
Fax: +44 1480 357 601  
info.uk@advantechwireless.com

**RUSSIA & CIS**  
Tel: +7 495 971 59 18  
info.russia@advantechwireless.com

**INDIA**  
Tel: +91 33 2415 5922  
info.india@advantechwireless.com

**SOUTH AMERICA**  
Tel: +1 514 420 0045  
Fax: +1 514 420 0073  
info.latam@advantechwireless.com

**BRAZIL**  
Tel: +55 11 3054 5701  
Fax: +55 11 3054 5701  
info.brazil@advantechwireless.com

An ISO 9001 : 2008 Company



Ref.: PB-SSPBg-Ku-150-250-13231