



300W to 500W  
AWMA-5000C™ series



### Features

- Remote Monitor & Control
- High gain and linearity
- Output power up to 500W (see table A)
- Gain adjustment
- Output sample monitor port
- Temperature gain compensation
- Automatic over-temperature shutdown
- Automatic high reflected power shutdown
- Infinite VSWR protection
- CE Marking

### Overview

The AWMA-C series are the outdoor solid-state power amplifiers (SSPAs), operating in C-Band frequency range. The amplifier is an integrated unit, complete with power supply and cooling system. Intended for outdoor operation, the AWMA-5000C® is weatherproof. Built-in microprocessor controller provides the capability for serial port interfaces (RS485) for remote monitoring and control.

Advantech's SSPAs set the industry standard for linearity and operating efficiency. Built-in design features and assembly methods incorporated with efficient combining techniques result in the trouble-free operation of the amplifier.


### Application

The SSPAs are designed for C-Band satellite up-link applications. They are mounted outdoors, near the hub of an antenna. The AWMA-C series are available in output power from 20W to 1000W. For higher power Advantech provides phase-combined systems.

Other SSPAs are available for operation at other satellite frequency bands. With all the features of the AWMA-C, Advantech also offers a built-in converter.

### Redundancy

With the addition of the appropriate waveguide and switch kit, the AWMA-5000C™ amplifiers can be easily converted for the operation in 1:1 redundant configuration with full remote Monitor and Control capability of the redundant system via serial interface. A single Monitor and Control interface is required to manage redundant system.

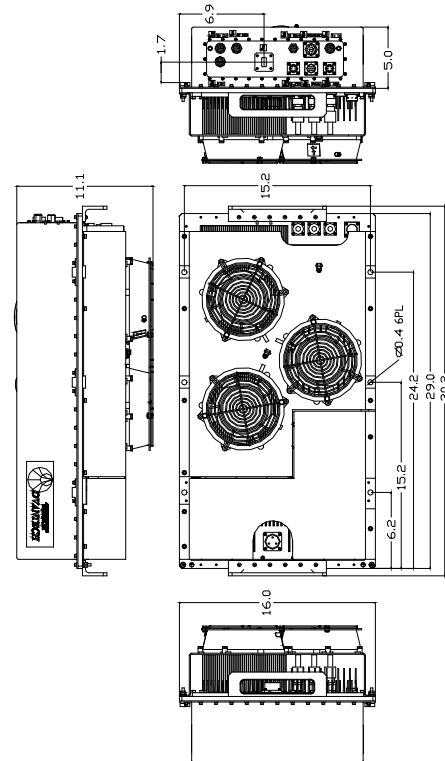

**Table A**

Band	RF Band (GHz)	Output Power (W)
CL	4.400 - 5.000	300-500
CP	6.425 - 6.725	300-400
CI	6.725 - 7.025	300-400
CR	5.725 - 6.025	300-500
CS	5.850 - 6.425	300-500
CX	5.850 - 6.725	300-400

*\*Other frequency sub-bands are available. Please consult factory.*

### Options

- Integrated Block Up Converter
- Additional harmonic filter
- Extreme temperature operation
- Redundant system

### Accessories

- Redundancy Kit
- Mounting Frames
- Remote M&C panel (Ethernet port optional)

# C-Band Hub-mount SSPA

Technical Specifications	300W	350W	400W	500W	
<b>Electrical Characteristics</b>					
Availability in this series					
CS, CR, CL	√	√	√	√	
CX, CI, CP	√	√	√	Note 1	
Output power (P <sub>SAT</sub> )	+55 dBm	+55.5 dBm	+56 dBm	+57 dBm	
Output power (P <sub>1dB</sub> ) min.	+54 dBm	+54.5 dBm	+55 dBm	+56 dBm	
Power gain @ maximum setting	64 dB min				
Operating frequency range	See table A on front page				
Max input power without damage	+10 dBm				
Gain slope	0.6 dB max over 40 MHz				
Gain flatness over 600 MHz	±1.0 dB max				
Gain variation over temperature	±1.5 dB over full operating temperature range				
Gain variation over 24 hours	±0.25 dB max at constant temperature & drive level				
Gain adjustment range	20 dB min (0.1 dB resolution)				
Input return loss	18 dB				
Output return loss	19 dB				
Noise power density	-70 dBm/Hz max in TX band -150 dBm/Hz max in 3.4 – 4.2 GHz RX band				
Spurious at rated power	-65 dBc max				
Harmonics at rated power	-60 dBc max				
AM/PM conversion at rated power	2.5°/dB typical (at P <sub>1dB</sub> ), 1°/dB max. at 3 dB back-off				
Third order IMD (2 tones 5 MHz apart)	-26 dBc max at 3 dB total back-off from rated P <sub>1dB</sub>				
Group delay	Linear: 0.02 nsec/MHz max. Parabolic: 0.003 nsec/MHz <sup>2</sup> max. Ripple: 1.0 nsec p-p max.				
Residual AM (F* - frequency in kHz)	0-10 kHz 10 kHz - 500 kHz 500 kHz - 1 MHz	-45 dBc -20 (1.25+log F*) dBc -80 dBc			
<b>Power Requirements</b>					
AC input voltage	220 VAC (47-63 Hz)				
Power consumption, (nominal)	1700W	2000W	2200W	2700W	
<b>Mechanical Characteristics</b>					
Dimensions (L x W x H)	30.00" x 16.00" x 11.00" (76.20x 40.60 x 28.00 cm)				
Weight	117 lbs (53 kg)				
Interfaces:	RF input Output sample port AC Line	Type N (Female) Type N (Female) MS3102E20-19P	Redundancy Discrete port RS-485	MS3112E14-12P MS3112E16-26P MS3112E10-6P	RF output CPR137 contact (for CL series - CPR187)
<b>Environmental Conditions</b>					
Temperature	Operating Storage	-30°C to +55°C. <i>Option 1: -40°C to +55°C; option 2: -50°C to +50°C</i> -55°C to +85°C			
Humidity	100%, condensing (2" rain/hour)				
Altitude	10,000' AMSL, derated 2°C/1,000' from AMSL				

Note 1 : Please refer to AWMA-6000C™ product datasheet

## NORTH AMERICA USA

Tel: +1 703 659 9796  
Fax: +1 703 635 2212  
info.usa@advantechwireless.com

## CANADA

Tel: +1 514 420 0045  
Fax: +1 514 420 0073  
info.canada@advantechwireless.com

## EUROPE

### UNITED KINGDOM

Tel: +44 1480 357 600  
Fax: +44 1480 357 601  
info.uk@advantechwireless.com

### RUSSIA & CIS

Tel: +7 495 971 59 18  
info.russia@advantechwireless.com

### INDIA

Tel: +91 33 2415 5922  
info.india@advantechwireless.com

## SOUTH AMERICA

Tel: +1 514 420 0045  
Fax: +1 514 420 0073  
info.latam@advantechwireless.com

## BRAZIL

Tel: +55 11 3054 5701  
Fax: +55 11 3054 5701  
info.brazil@advantechwireless.com

An ISO 9001 : 2008 Company



Ref.: PB-AWMA-C-300-500-13150