

## APC8620A PCI Bus IP Carrier Card

This board interfaces industry-standard Industrial I/O Pack (IP) modules to a PCI bus on a PC-based computer system.

Five IP module slots give you the freedom to mix a variety of I/O functions (A/D, D/A, digital in, digital out, serial I/O, etc.) on a single board. Or, combine modules of the same type for hundreds of channels on a single card. Either way, the APC8620A saves your precious card slots and reduces your costs.


Select I/O modules from Acromag's offering of more than forty models or use any third-party IP mezzanine ANSI/VITA 4 modules.

### Features

- Five industry-standard IP module slots
- Board resides in memory space
- Supports IP module I/O, ID, INT, and MEM spaces
- Plug-and-play carrier configuration and interrupt support
- Two interrupt channels per IP module
- Supervisory circuit reset generation
- Individually filtered and fused power

### Benefits

- Quickly create custom I/O boards by mixing and matching I/O functions.
- Conveniently configure and control the I/O modules through software with full IP module register/data access.
- Easily integrate IPs with your software using RTOS VxWorks, QNX, Linux, or Win DLL for Windows® 2000/XP/Vista/7 32-bit systems.

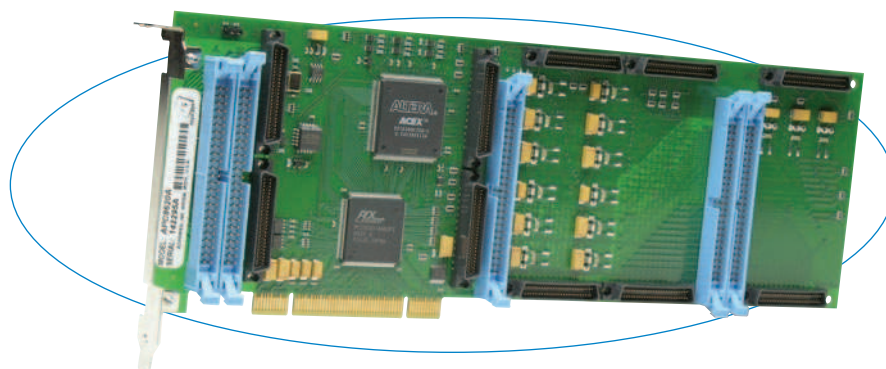

The APC8620A carrier card holds up to five plug-in I/O modules for extremely high channel density.

### Specifications

#### IP Module Compliance (ANSI/VITA 4)

Meets or exceeds all written IP specifications per ANSI/VITA 4-1995 for 8MHz or 32MHz operation.

Supports Type I and Type II ID space formats.

Electrical/mechanical interface: Supports five single-size IP modules (A-E), or two double-size and one single-size IP module.

IP module I/O space, ID space, INT, and MEM space supported.

IP module I/O space: 16 and 8-bit; supports 128 byte values per IP module.

IP module ID space: 16 and 8-bit; Supports Type I 32 bytes per IP (consecutive even byte addresses) and Type II 32 words per IP via D16 data transfers.

IP module memory space: 16 and 8-bit; supports up to 8M bytes of memory space per IP module.

Interrupts: Supports two interrupt requests per IP and interrupt acknowledge cycles via access to IP INT space.

#### PCI Bus Compliance

This device meets or exceeds all written PCI local bus specifications per rev. 2.2 dated December 1998.

System base address: This board operates in PCI memory space. It requires 1K of memory space for mapping the carrier controls, and IP module ID, INT, and I/O space. An optional 64MB of PCI memory space is required to use IP module memory space.

Data transfer bus: Slave with 32, 16, and 8-bit data transfer operation. 32-bit read or write accesses implemented as two 16-bit transfers to IP modules.

Interrupts (PCI bus INTA# interrupt signal):

Up to two requests sourced from each IP mapped to INTA#. Interrupt vectors come from IP modules via access to IP module INT space.

#### Environmental

Operating temperature: 0 to 70°C (APC8621A) or -40 to 85°C (APC8621AE model).

Storage temperature: -55 to 100°C (all models).

Relative humidity: 5-95% non-condensing

Power: +3.3 Volts ( $\pm 10\%$ ): 130mA, typical; 50mA max.  
+5 Volts ( $\pm 5\%$ ): 30mA, typical; 50mA, max.  
 $\pm 12$  Volts provided to each IP module.

MTBF: 413,003 hrs. at 25°C, MIL-HDBK-217F, notice 2

#### Physical

Physical configuration: PCI universal card (3.3V or 5V)

Length: 12.283 inches (312.0 mm)

Height: 4.200 inches (106.68 mm)

Board thickness: 0.062 inches (1.59 mm)

Maximum component height: 0.380 in. (9.65 mm)

Max. height under IP modules: 0.180 in. (4.57 mm).

Connectors:

A-E (carrier field I/O): 50-pin male header

### Ordering Information

#### Industry Pack Carriers

##### APC8620A

Non-intelligent PCI bus carrier board.

Holds five [IP modules](#).

##### APC8620AE

Same as APC8620A plus extended temperature range.

#### Software

[IPSW-API-VXW](#): VxWorks® software support package

[IPSW-API-WIN32](#): 32-bit Windows® DLL driver software support pkg.

[IPSW-API-WIN64](#): 64-bit Windows® DLL driver software support pkg.

[IPSW-LINUX](#): Linux® support (website download only)

#### Accessories

[5025-550](#): Cable, unshielded, 50-pin header both ends

[5025-551](#): Same as 5025-550 except shielded

[5025-552](#): Termination panel, 50-pin connector, 50 screw terminals

All trademarks are the property of their respective owners.