
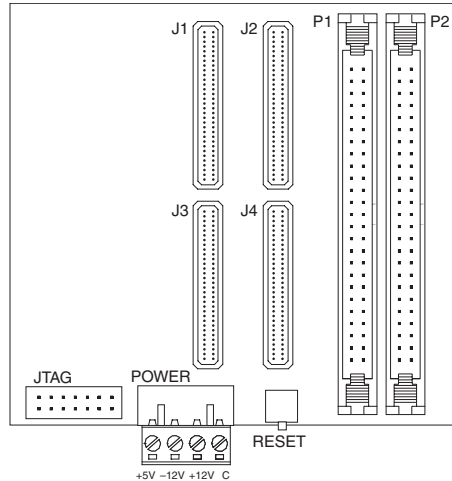


# ▶ PMC Module Carriers

## APMC4110 Busless PMC Module Carrier Card

24 HOUR STOCK ITEM  
2 YEAR WARRANTY

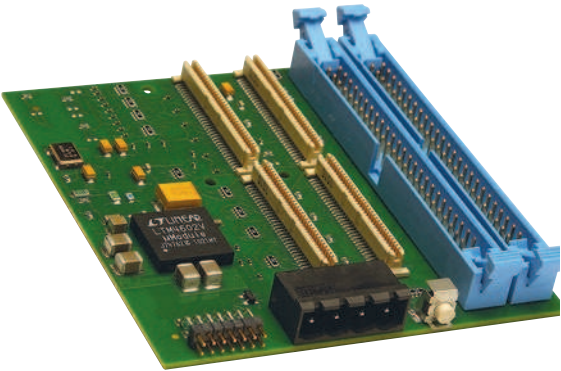

Holds one PMC module ♦ Delivers power to PMC module ♦ Enables a trouble-free start-up sequence

### Description

This PMC module carrier card allows use of a PMC module in an independent stand-alone mode. The carrier card delivers power to the PMC module and regulates the PCI bus start-up sequence to prevent a system lock-up by the connection to the local bus.

As a non-intelligent carrier, the board acts simply as an adapter to route signals to and from the PMC module. The user has full access to the field I/O via two 50-pin ribbon cable connectors.

Using an external power supply, this carrier card allows use of any industry-standard PMC module. The on-board DC-DC converter creates +3.3VDC from the external +5VDC source, lowering the number of external power connections required.

For troubleshooting, a 14-pin Xilinx JTAG connector facilitates boundary scan debugging. Also, a manual reset button allows the user to force an RST# signal when needed.

### Key Features & Benefits

- Single-slot PMC carrier card
- Stand-alone design does not require expensive card cage or other computer chassis
- Ideal for custom computing solutions based on configurable FPGA modules
- On-board DC-DC converter provides +3.3V DC to the PMC module from a +5V power source
- Users can optionally provide a  $\pm 12V$  DC source
- Manual reset button initiates a PCI reset at user's discretion
- Voltage monitor designed to prevent code execution errors during power-up, power-down, or potential brown-out conditions when +5V DC supply dips too low
- A standard 14-pin Xilinx JTAG connection is available for utilizing the TDI, TDO, TCK, and TMS signals
- Front or rear connection I/O access

**Acromag**   
THE LEADER IN INDUSTRIAL I/O

Tel 248-295-0310 ■ Fax 248-624-9234 ■ solutions@acromag.com ■ www.acromag.com ■ 30765 Wixom Rd, Wixom, MI 48393 USA

# PMC Module Carriers

## APMC4110 Busless PMC Module Carrier Card

### Performance Specifications

#### ■ PMC Compatibility

Pin assignment conforms to PCI Bus Specification, Revision 3.0.

#### ■ Physical

##### Physical Configuration

Height: 3.300 inches (83.820 mm).

Depth: 3.520 inches (89.408 mm).

Board Thickness: 0.063 inches (1.600 mm).

Unit Weight: 0.107 lbs. (0.053 kg).

##### Connectors

P1, P2 (Field I/O): 50-pin, ribbon cable, male receptacle headers.

P3: 4-pin power header.

P4: 14-pin Xilinx JTAG port.

J1 - J4: 64-pin PMC module connectors.

#### ■ Environmental

Operating temperature  
-40 to 85°C.

Storage temperature  
-55 to 120°C.

Relative humidity  
5 to 95% non-condensing.

Power  
+5V ( $\pm 5\%$ ): 66mA, typical.  
+12V ( $\pm 10\%$ ): 0mA, used by PMC module only.

-12V ( $\pm 10\%$ ): 0mA, used by PMC module only.  
Note that 3.3V is generated from the 5V supply.  
Power requirements do not include the PMC module.

$\pm 12.0V$  DC is optional based on user's needs.

##### Isolation

Non-Isolated. PCI interface and field commons have a direct electrical connection.

##### MTBF

Contact the factory.

### Ordering Information

#### Carrier Card

APMC4110

Stand-alone powered PMC module carrier card.

#### Accessories

5025-550-x

Flat ribbon cable, non-shielded, 50-pin connector at both ends. Specify x = length, in feet (12ft. max.).

5025-551-x

Flat ribbon cable, shielded, 50-pin connector at both ends. Specify x = length, in feet (12ft. max.).

5025-552



Termination panel, DIN rail-mount, 50 screw terminals, 50-pin ribbon cable connector.

#### PMC Modules

See [www.acromag.com](http://www.acromag.com) for more information.

#### Software Development Tools

See [www.acromag.com](http://www.acromag.com) for more information.

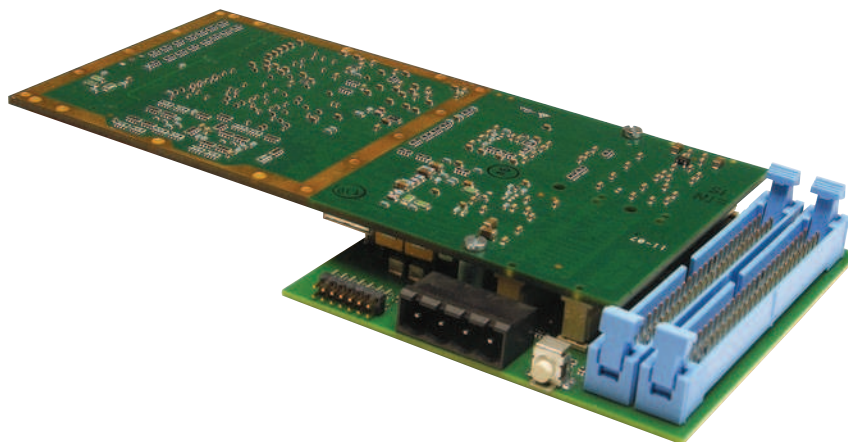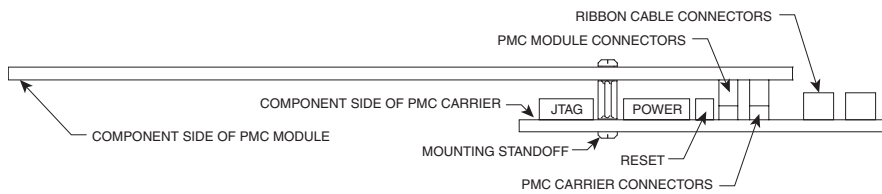

ISO9001  
AS9100  
MADE IN USA

Acromag®  
THE LEADER IN INDUSTRIAL I/O

Tel 248-295-0310 ■ Fax 248-624-9234 ■ [solutions@acromag.com](mailto:solutions@acromag.com) ■ [www.acromag.com](http://www.acromag.com) ■ 30765 Wixom Rd, Wixom, MI 48393 USA