



## SERIES 621/622



### FEATURES

Two contact rows with .318" (8.08mm) footprint right-angle bend.

.109" (2.77mm) contact spacing x .112" (2.82mm) row spacing

Plug and receptacle in 9-, 15-, 25- or 37- pin contact sizes  
Pin and socket contact mating design with PC tail termination

Metal shell provides EMI/RFI shielding, Plug Shell indents provide grounding and additional mating retention

Grounding features include top or bottom ground plates and four-prong boardlock for superior retention to PC Board

Mounting options for panel mount or connector mating include through hole, threaded inserts and threaded standoffs

D-shaped connector mating outline provides polarization  
Design based on requirements of MIL-C-24308, EIA RS-232 and RS-449

### SPECIFICATIONS

Insulator Material: Thermoplastic polyester UL 94V-0; chemical resistant; colour - black

Ferrite Specifications: Attenuation - 20db MIN @ 30Mhz, 30db MIN @ 50MHz, and 50dB @ 100Mhz

Contact Material: Plug contacts- brass  
Receptacle contacts - phosphor bronze

Contact Plating: Gold (see Ordering Code) over nickel for the mating area; tin plating on contact tails

Shell Material: Nickel-plated steel

Current Rating: 5 amperes

Contact Resistance: 10 milliohms maximum

Dielectric Withstanding Voltage: 1000 V AC rms @ sea level

Insulation Resistance: 5000 megohm minimum

Operating Temperature: -55 to + 105 degrees C

Engagement and Separation Force: 1 to 10 oz (0.28 to 2.78 N) per contact position

### Example Part Number 621 - 025 - 560 - 0 1 3

Series \_\_\_\_\_  
Total Number of Contacts \_\_\_\_\_  
Contact/Plating Code \_\_\_\_\_  
Material Code \_\_\_\_\_  
Grounding Feature \_\_\_\_\_  
Mounting Option \_\_\_\_\_

#### Series

621 \_\_\_\_\_ Plug  
622 \_\_\_\_\_ Receptacle

#### Total Contacts

009, 015, 025, 037.....50 (machined pin only)

#### Contact/Plating Code

260 \_\_\_\_\_ Gold Flash (Class 3)  
560 \_\_\_\_\_ 10u" (0.25um) (Class 2)  
660 \_\_\_\_\_ 30u" (0.76um) (Class 1)  
668 \_\_\_\_\_ Ferrite Filter

#### Material Code


0 \_\_\_\_\_ Indicates generic internal use code

#### Grounding Feature


1 \_\_\_\_\_ .120" (3.05mm) dia. through hole top ground  
3 \_\_\_\_\_ Two-prong boardlocks for .120" (3.05mm) dia. PCB hole  
4 \_\_\_\_\_ Four-prong boardlocks for .120" (3.05mm) dia. PCB hole

#### Mounting Option


0 \_\_\_\_\_ #4-40 UNC fixed standoff  
1 \_\_\_\_\_ .125" (3.18mm) dia. through-hole  
2 \_\_\_\_\_ #4-40 UNC threaded insert  
3 \_\_\_\_\_ #4-40 UNC threaded standoff  
5 \_\_\_\_\_ #4-40 UNC threaded standoff & lock washer

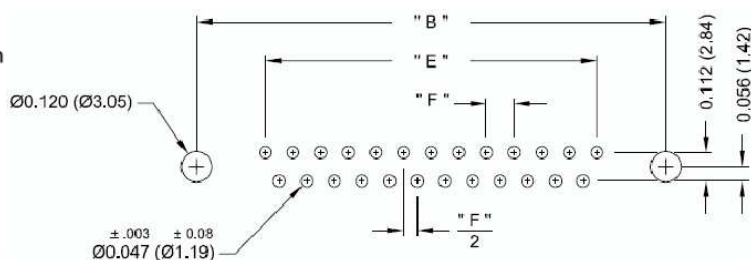

RECOMMENDED BOARD HOLE PATTERN

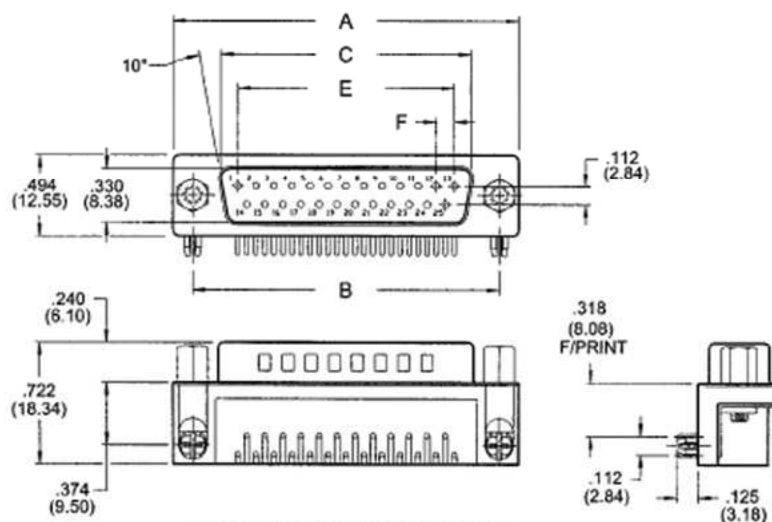

RECEPTACLE 622 SERIES

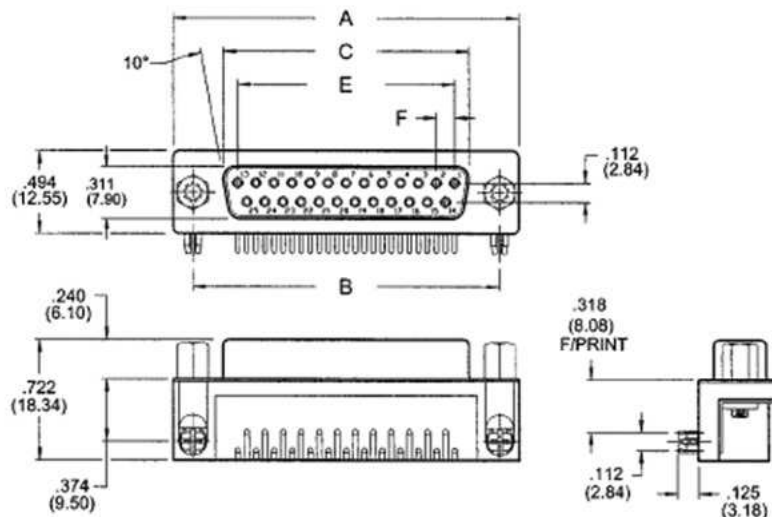

NUMBER OF CONTACTS	A		B		C PLUG		C RECEPTACLE		E		F	
	Inch	(mm)	Inch	(mm)	Inch	(mm)	Inch	(mm)	Inch	(mm)	Inch	(mm)
9	1.214	(30.84)	.984	(24.99)	.667	(16.92)	.640	(16.26)	.432	(10.97)	.108	(2.74)
15	1.545	(39.24)	1.312	(33.32)	.994	(25.25)	.967	(24.56)	.756	(19.20)	.108	(2.74)
25	2.088	(53.04)	1.852	(47.04)	1.534	(38.96)	1.508	(38.30)	1.304	(33.12)	.109	(2.76)
37	2.730	(69.34)	2.500	(63.50)	2.182	(53.08)	2.156	(54.76)	1.956	(49.68)	.109	(2.76)